

PATENT APPLICATION TRANSMITTAL LETTER

To the Assistant Commissioner for Patents:

Transmitted herewith for filing is the patent application of: Naoya Hasegawa for : SPIN-VALVE TYPE MAGNETORESISTIVE SENSOR AND METHOD OF MANUFACTURING THE SAME.

Enclosed are:

- ☒ Preliminary Amendment
- ☒ 144 pages of application (including title page), 22 sheets of drawings, and the following Appendices : N/A.
- ☒ Declaration and Power of Attorney for Patent Application.
- ☒ Assignment transmittal letter and Assignment of the invention to: ALPS Electric Co., Ltd.
- ☒ Submission of Certified Copy of Priority Document and certified copy of Japanese Application No. 11-157132.
- ☒ Information Disclosure Statement; PTO-1449 reference A1-A7.

Claims as Filed	Col. 1	Col. 2
For	No. Filed	No. Extra
Basic Fee		
Total Claims	14-20	0
Indep. Claims	1-3	0
Multiple Dependent Claims Present		

\*If the difference in col. 1 is less than zero, enter "0" in col. 2.

Small Entity	
Rate	Fee
	\$ 345
x\$9=	\$
x\$39=	\$
+\$130=	\$
Total	\$

Other Than Small Entity	
Rate	Fee
	\$ 690
x\$18=	\$
x\$78=	\$
+\$260=	\$
Total	\$690

Please charge my Deposit Account No. 23-1925 in the amount of \$: \_\_\_\_\_. A duplicate copy of this sheet is enclosed.

A check in the amount of \$: 690 to cover the filing fee is enclosed.

The Assistant Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 23-1925. A duplicate copy of this sheet is enclosed.

- ☒ Any additional filing fees required under 37 CFR § 1.16.
- ☒ Any patent application processing fees under 37 CFR §1.17.
- ☐ The Assistant Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 23-1925. A duplicate copy of this sheet is enclosed.
  - ☐ Any filing fees under 37 CFR § 1.16 for presentation of extra claims.
  - ☐ Any patent application processing fees under 37 CFR § 1.17.
  - ☐ The issue fee set in 37 CFR § 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR § 1.311(b).

Date6/2/00

  
Gustavo Siller, Jr.  
BRINKS HOFER GILSON & LIONE  
Registration No. 32,305

EXPRESS MAIL NO. EL 576 622 352 US

DATE OF DEPOSIT 6/2/06

Our Case No. 9281-3660  
Client Reference No. N US99090

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Application of:	)	
NAOYA HASEGAWA	)	
Serial No.: TO BE ASSIGNED	)	Examiner:
Filing Date: HERewith	)	Group Art Unit No.:
For: SPIN-VALVE	)	
MAGNETORESISTIVE SENSOR AND	)	
METHOD OF MANUFACTURING THE	)	
SAME	)	

**PRELIMINARY AMENDMENT**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:

Prior to Examination of the above-identified application, please amend the application as follows:

**In the Specification**

On page 23, line 9, delete "lease" and substitute --least-- in its place.

On page 43, line 14, delete "15ab" and substitute --151b-- in its place.

On page 47, line 11, delete the first occurrence of "2" and substitute --3-- in its place.

On page 98, line 11, delete "electrode layers 28, 28".

On page 106, line 2, delete "22" and substitute --52-- in its place.

On page 121, line 25, delete "22" and substitute --52-- in its place.

On page 126, line 6, delete "350" and substitute --352-- in its place.

On page 126, line 6, delete "havs" and substitute --has-- in its place.


## In the Claims

1. (AMENDED) A spin-valve type magnetoresistive sensor comprising, on a substrate, an antiferromagnetic layer; a pinned magnetic layer formed in contact with said antiferromagnetic layer and having a magnetization direction made stationary under an exchange anisotropic magnetic field generated by interaction with said antiferromagnetic layer; a non-magnetic electrically conductive layer formed between a free magnetic layer and said pinned magnetic layer; soft magnetic layers arranged on said free magnetic layer [while] having a spacing corresponding to a track width [is left] between said soft magnetic layers; bias layers formed on said soft magnetic layers and [acting] to uniformly arrange a magnetization direction of said free magnetic layer in a direction crossing the magnetization direction of said pinned magnetic layer; and electrically conductive layers [for applying] to apply a detection electric current to said free magnetic layer,

said antiferromagnetic layer and said bias layer [being] each [made of] comprising an alloy containing at least one [or more elements] element selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn.


2. (AMENDED) A spin-valve type magnetoresistive sensor according to Claim 1, wherein at [lease] least one of said pinned magnetic layer and said free magnetic layer is divided into two layers with a non-magnetic intermediate layer interposed between the two layers, and the divided two layers are held in a ferrimagnetic state [where these] in which the divided two layers are magnetized in directions 180°\_different from each other.

3. (AMENDED) A spin-valve type magnetoresistive sensor according to Claim 1, wherein said antiferromagnetic layer [is made of] comprises an alloy having the following composition formula;




where X is at least one [or more elements] element selected from among Pt, Pd, Rh, Ru, Ir and Os, and a composition ratio  $m$  satisfies  $48 \text{ atom } \% \leq m \leq 60 \text{ atom } \%$ .

4. (AMENDED) A spin-valve type magnetoresistive sensor according to Claim 1, wherein said bias layer [is made of] comprises an alloy having the following composition formula;




where X is at least one [or more elements] element selected from among Pt, Pd, Rh, Ru, Ir and Os, and a composition ratio  $m$  satisfies  $48 \text{ atom } \% \leq m \leq 60 \text{ atom } \%$ .

5. (AMENDED) A spin-valve type magnetoresistive sensor according to Claim 1, wherein said antiferromagnetic layer [is made of] comprises an alloy having the following composition formula;



where D is at least one [or more elements] element selected from among Pd, Rh, Ru, Ir and Os, and composition ratios  $m, n$  satisfy  $48 \text{ atom } \% \leq m + n \leq 60 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq n \leq 40 \text{ atom } \%$ .

6. (AMENDED) A spin-valve type magnetoresistive sensor according to Claim 1, wherein said bias layer [is made of] comprises an alloy having the following composition formula;



where D is at least one [or more elements] element selected from among Pd, Rh, Ru, Ir and Os, and composition ratios  $m, n$  satisfy  $52 \text{ atom } \% \leq m + n \leq 60 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq n \leq 40 \text{ atom } \%$ .

7. (AMENDED) A spin-valve type magnetoresistive sensor according to Claim 1, wherein said soft magnetic layer [is made of] comprises a NiFe alloy.

8. (AMENDED) A spin-valve type magnetoresistive sensor according to Claim 1, wherein recesses are formed in said free magnetic layer on both sides of an area corresponding to [a] the track width, said soft magnetic layers are formed to fill said recesses and are directly joined to said free magnetic layer through bottom surfaces of said recesses, and said bias layers and said electrically conductive layers are successively formed on said soft magnetic layers.

9. (AMENDED) A spin-valve type magnetoresistive sensor according to Claim 1, wherein said free magnetic layer is divided into [two layers with] a first free magnetic layer disposed farther away from the pinned magnetic layer and a second free magnetic layer disposed closer to the pinned magnetic layer, a non-magnetic intermediate layer is interposed between the [two layers, and wherein, assuming that one free magnetic layer farther away from said pinned magnetic layer is a first free magnetic layer and the other free magnetic layer closer to said pinned magnetic layer is a second free magnetic layer,] first free magnetic layer and the second free magnetic layer, a magnetic film thickness of said first free magnetic layer is smaller than a magnetic film thickness of said second free magnetic layer.

10. (AMENDED) A method of manufacturing a spin-valve type magnetoresistive sensor comprising [the steps of]:


forming an antiferromagnetic layer, a pinned magnetic layer, a non-magnetic electrically conductive layer, and a free magnetic layer successively on a substrate, thereby forming a first laminate;

heat-treating said first laminate at a first heat treatment temperature while applying a first magnetic field in a direction perpendicular to a direction of a track width, thereby generating an exchange anisotropic magnetic field in said antiferromagnetic layer to make magnetization of said pinned magnetic layer stationary;

forming soft magnetic layers on said first laminate while a spacing corresponding to the track width is left between said soft magnetic layers, forming bias layers on said soft magnetic layers, and forming electrically conductive layers on said bias layers [for applying] to apply a detection electric current to said free magnetic layer, thereby forming a second laminate; and

heat-treating said second laminate at a second heat treatment temperature while applying a second magnetic field smaller than the exchange anisotropic magnetic field of said antiferromagnetic layer in [a] the direction of the track width, thereby imparting a bias magnetic field to said free magnetic layer in a direction crossing a magnetization direction of said pinned magnetic layer.

Respectfully submitted,

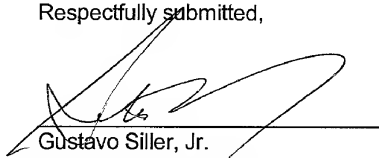A handwritten signature in black ink, appearing to read 'Gustavo Siller, Jr.', is written over a horizontal line.

Gustavo Siller, Jr.  
Registration No. 32,305  
Attorney for Applicants

BRINKS HOFER GILSON & LIONE  
P.O. BOX 10395  
CHICAGO, ILLINOIS 60610  
(312) 321-4200

Our Case No. 9281/3660  
Client Reference No. N US99090

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE  
APPLICATION FOR UNITED STATES LETTERS PATENT

INVENTOR: NAOYA HASEGAWA

TITLE: SPIN-VALVE TYPE  
MAGNETORESISTIVE SENSOR  
AND METHOD OF  
MANUFACTURING THE SAME

ATTORNEY: GUSTAVO SILLER, JR.  
BRINKS HOFER GILSON & LIONE  
P.O. BOX 10395  
CHICAGO, ILLINOIS 60610  
(312) 321-4200

EXPRESS MAIL NO. EL 576 622 352 US

DATE OF MAILING 6/2/00

SPIN-VALVE TYPE MAGNETORESISTIVE SENSOR AND  
METHOD OF MANUFACTURING THE SAME

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a spin-valve type magnetoresistive sensor wherein electrical resistance is changed depending on the relationship between a stationary magnetization direction of a pinned magnetic layer and a magnetization direction of a free magnetic layer which is affected by an external magnetic field. More particularly, the present invention relates to a spin-valve type magnetoresistive sensor having superior heat resistance, a magnetoresistive head incorporating the spin-valve type magnetoresistive sensor, and to a method of manufacturing the spin-valve type magnetoresistive sensor, by which the magnetization direction of the free magnetic layer and the magnetization direction of the pinned magnetic layer can be easily set in orthogonal relation.

2. Description of the Related Art

There are known two types of magnetic heads utilizing a magnetoresistive effect; i.e., an AMR (Anisotropic Magnetoresistive) head incorporating a sensor which exhibits a magnetoresistive effect and a GMR (Giant Magnetoresistive) head incorporating a sensor which exhibits a giant magnetoresistive



effect. In the AMR head, the sensor exhibiting a magnetoresistive effect has a single-layer structure formed of a magnetic substance. On the other hand, the GMR head comprises a multilayer structure sensor made of a plurality of materials formed as a laminate of layers. There are several types of structures capable of developing a giant magnetoresistive effect. A spin-valve type magnetoresistive sensor is known as having a relatively simple structure and providing a high rate of resistance change with respect to a weak external magnetic field.

Figs. 13 and 14 are sectional views each showing the structure of an example of conventional spin-valve type magnetoresistive sensors, as viewed from the side facing a recording medium.

Above and below the spin-valve type magnetoresistive sensor of each example, shielding layers are formed with gap layers interposed therebetween. The spin-valve type magnetoresistive sensor, the gap layers, and the shielding layers cooperatively construct a GMR head for reproduction. An inductive head for magnetic recording may be layered on the GMR head for reproduction. The GMR head for reproduction is provided, for example, on a trailing end face of a floating slider along with the inductive head for magnetic recording, whereby a magnetoresistive head is constructed. The magnetoresistive head is used to detect a magnetic field recorded on a magnetic recording medium such as a hard disk.

In Figs. 13 and 14, a Z-direction represents the moving direction of a magnetic recording medium, and a Y-direction represents the direction of a leakage magnetic field from the magnetic recording medium.

The spin-valve type magnetoresistive sensor shown in Fig. 13 is one example of the so-called bottom type single-spin-valve magnetoresistive sensors wherein an antiferromagnetic layer, a pinned magnetic layer, a non-magnetic electrically conductive layer, and a free magnetic layer are formed on a substrate one by one in this order from the substrate side.

The spin-valve type magnetoresistive sensor shown in Fig. 13 comprises a multilayer film 33 made up of an underlying layer 31, an antiferromagnetic layer 22, a pinned magnetic layer 23, a non-magnetic electrically conductive layer 24, a free magnetic layer 25 and a protective layer 32, which are formed in this order from the lower side in Fig. 13; a pair of hard bias layers (permanent magnetic layers) 29, 29 formed on both sides of the multilayer film 33; and a pair of electrode layers 28, 28 formed respectively on the hard bias layers 29, 29.

The underlying layer 31 and the protective layer 32 are each formed of a Ta film or the like. Also, a track width  $T_w$  is determined by the width of an upper surface of the multilayer film 33.

In general, the antiferromagnetic layer 22 is formed of a Fe-Mn alloy film or a Ni-Mn alloy film, and the pinned magnetic

layer 23 and the free magnetic layer 25 are each formed of a Ni-Fe alloy film. The non-magnetic electrically conductive layer 24 is formed of a Cu film, the hard bias layers 29, 29 are each formed of a Co-Pt alloy film, and the electrode layers 28, 28 are each formed of a Cr or W film.

As shown in Fig. 13, magnetization of the pinned magnetic layer 23 is brought into a single domain state in the Y-direction (the direction of a leakage magnetic field from the magnetic recording medium; the direction of height) under an exchange anisotropic magnetic field cooperatively generated in the antiferromagnetic layer 22. Magnetization of the free magnetic layer 25 is uniformly arranged in a direction opposing to the X1-direction under the effect of a bias magnetic field from the hard bias layers 29, 29.

In other words, the magnetization of the pinned magnetic layer 23 and the magnetization of the free magnetic layer 25 are set to cross in orthogonal relation.

In the spin-valve type magnetoresistive sensor shown in Fig. 13, a detection electric current (sensing electric current) is applied from the electrode layers 28, 28 formed on the hard bias layers 29, 29 to the pinned magnetic layer 23, the non-magnetic electrically conductive layer 24 and the free magnetic layer 25. The magnetic recording medium such as a hard disk travels in the Z-direction. When a leakage magnetic field from the magnetic recording medium is applied in the Y-direction, the

magnetization of the free magnetic layer 25 is varied from the direction opposing to the X1-direction toward the Y-direction. Electrical resistance is changed (called a magnetoresistance change) depending on the relationship between a variation of the magnetization direction in the free magnetic layer 25 and the stationary magnetization direction of the pinned magnetic layer 23. The leakage magnetic field from the magnetic recording medium can be detected in accordance with a voltage change caused by such a change in electrical resistance value.

The spin-valve type magnetoresistive sensor shown in Fig. 14 is another example of the so-called bottom type single-spin-valve magnetoresistive sensors wherein an antiferromagnetic layer, a pinned magnetic layer, a non-magnetic electrically conductive layer, and a free magnetic layer are formed on a substrate one by one in this order from the substrate side (the lower side in Fig. 14).

In Fig. 14, character K denotes a substrate. An antiferromagnetic layer 22 is formed on the substrate K. Further, a pinned magnetic layer 23 is formed on the antiferromagnetic layer 22, and a non-magnetic electrically conductive layer 24 is formed on the pinned magnetic layer 23. Moreover, a free magnetic layer 25 is formed on the non-magnetic electrically conductive layer 24.

On the free magnetic layer 25, a pair of bias layers 26, 26 are formed while a spacing corresponding to a track width Tw

is left between the bias layers 26, 26. A pair of electrically conductive layers 28, 28 are formed respectively on the bias layers 26, 26.

The pinned magnetic layer 23 is formed of, for example, a Co film, a NiFe alloy, a CoNiFe alloy, or a CoFe alloy. The antiferromagnetic layer 22 is formed of a NiMn alloy.

The bias layer 26 is formed of an antiferromagnetic material, such as a FeMn alloy, which belongs to the face-centered cubic system, has an irregular crystal structure, and does not require heat treatment for generating an exchange anisotropic magnetic field.

The pinned magnetic layer 23 shown in Fig. 14 is magnetized in one direction under an exchange anisotropic magnetic field based on exchange coupling produced at the interface between the pinned magnetic layer 23 and the antiferromagnetic layer 22. The magnetization direction of the pinned magnetic layer 23 is made stationary in the Y-direction shown in Fig. 14, i.e., the direction away from the magnetic recording medium (direction of height).

Also, the free magnetic layer 25 is magnetized into a single domain state under an exchange anisotropic magnetic field cooperatively generated in the bias layers 26. Then, the magnetization direction of the free magnetic layer 25 is uniformly arranged in a direction opposing to the X1-direction shown in Fig. 14, i.e., a direction perpendicularly crossing the

magnetization direction of the pinned magnetic layer 23.

Because the free magnetic layer 25 is magnetized into a single domain state under the exchange anisotropic magnetic field cooperatively generated in the bias layers 26, the occurrence of Barkhausen noise is prevented.

In the conventional spin-valve type magnetoresistive sensor shown in Fig. 14, a steady electric current is applied from the electrically conductive layer 28 to the free magnetic layer 25, the non-magnetic electrically conductive layer 24 and the pinned magnetic layer 23. When a leakage magnetic field from the magnetic recording medium traveling in the Z-direction is applied in the Y-direction in the above condition, the magnetization of the free magnetic layer 25 is varied from the direction opposing to the X1-direction toward the Y-direction. Electrical resistance is changed depending on the relationship between a variation of the magnetization direction in the free magnetic layer 25 and the stationary magnetization direction of the pinned magnetic layer 23. The leakage magnetic field from the magnetic recording medium can be detected in accordance with a voltage change caused by such a change in electrical resistance.

The spin-valve type magnetoresistive sensor shown in Fig. 14 is manufactured as follows. As shown in Fig. 15, all the component layers from the antiferromagnetic layer 22 to the free magnetic layer 25 are successively formed on the substrate K one

above another, and are then subjected to heat treatment (annealing) under a magnetic field. An exchange anisotropic magnetic field is thereby generated at the interface between the pinned magnetic layer 23 and the antiferromagnetic layer 22 to make the magnetization direction of the pinned magnetic layer 23 stationary in the Y-direction shown in Fig. 14. Further, as shown in Fig. 16, a lift-off resist 351 having a width substantially corresponding to the track width is formed. Then, as shown in Fig. 17, the bias layer 26 and the electrically conductive layer 28 are successively formed on a surface area of the free magnetic layer 25 which is not covered by the lift-off resist 351. After removing the lift-off resist 351, the magnetization direction of the free magnetic layer 25 is uniformly arranged in the direction of the track width. As a result, the spin-valve type magnetoresistive sensor having the magnetization direction shown in Fig. 14 is manufactured.

Next, Fig. 18 is a sectional view showing the structure of a principal part of a magnetoresistive head including still another example of conventional spin-valve type magnetoresistive sensors, as viewed from the side facing a recording medium.

In Fig. 18, symbol MR3 denotes a spin-valve type magnetoresistive sensor, and symbol a12 denotes a laminate. The laminate a12 is formed such that an antiferromagnetic layer 122 is formed on an underlying layer 121; a pinned magnetic layer

153 is formed on the antiferromagnetic layer 122; a non-magnetic electrically conductive layer 124 is formed on the pinned magnetic layer 153; a free magnetic layer 175 is formed on the non-magnetic electrically conductive layer 124; and a protective layer 127 is formed on the free magnetic layer 175.

The free magnetic layer 175 in the spin-valve type magnetoresistive sensor MR3 of this example is made of a non-magnetic intermediate layer 176, a first free magnetic layer 177, and a second free magnetic layer 178, the first and second layers 177, 178 sandwiching the non-magnetic intermediate layer 176 therebetween.

The first free magnetic layer 177 is positioned closer to the protective layer 127 than the non-magnetic intermediate layer 176, and the second free magnetic layer 178 is positioned closer to the non-magnetic electrically conductive layer 124 than the non-magnetic intermediate layer 176. Further, the second free magnetic layer 178 is made up of a diffusion preventing layer 179 and a ferromagnetic layer 180.

The second free magnetic layer 178 has a thickness  $t_2$  greater than a thickness  $t_1$  of the first free magnetic layer 177. Also, assuming that saturation magnetization of the first free magnetic layer 177 and the second free magnetic layer 178 is respectively  $M_1$ ,  $M_2$ , a magnetic film thickness of the first free magnetic layer 177 and the second free magnetic layer 178 is respectively  $M_1 \cdot t_1$ ,  $M_2 \cdot t_2$ . Since the second free magnetic layer



178 is made up of the diffusion preventing layer 179 and the ferromagnetic layer 180, the magnetic film thickness  $M_2 \cdot t_2$  of the second free magnetic layer 178 is given as the sum of a magnetic film thickness of the diffusion preventing layer 179 and a magnetic film thickness of the ferromagnetic layer 180.

Further, the free magnetic layer 175 is formed such that the magnetic film thicknesses of the first free magnetic layer 177 and the second free magnetic layer 178 satisfy a relationship of  $M_2 \cdot t_2 > M_1 \cdot t_1$ . Moreover, the first free magnetic layer 177 and the second free magnetic layer 178 are coupled to each other in antiferromagnetic relation. In other words, when the magnetization direction of the second free magnetic layer 178 is uniformly arranged in the  $X_1$ -direction shown in Fig. 18, the magnetization direction of the first free magnetic layer 177 is uniformly arranged in a direction opposing to the  $X_1$ -direction.

In addition, since the magnetic film thicknesses of the first and second free magnetic layers 177, 178 satisfy the relationship of  $M_2 \cdot t_2 > M_1 \cdot t_1$ , the magnetization of the second free magnetic layer 178 remains eventually and the magnetization direction of the free magnetic layer 175 is uniformly arranged as a whole in the  $X_1$ -direction. At this time, an effective film thickness of the free magnetic layer 175 is given by  $(M_2 \cdot t_2 - M_1 \cdot t_1)$ .

Thus, the first free magnetic layer 177 and the second free magnetic layer 178 are coupled to each other in antiferromagnetic relation so as to have antiparallel magnetization directions,

and their magnetic film thicknesses satisfy the relationship of  $M_2 \cdot t_2 > M_1 \cdot t_1$ , whereby the free magnetic layer 175 is brought into an artificial ferrimagnetic state. Also, the magnetization direction of the free magnetic layer 175 and the magnetization direction of the pinned magnetic layer 153 cross each other.

The conventional spin-valve type magnetoresistive sensor shown in Fig. 13 however has a risk of causing the problem described below.

As mentioned above, the magnetization of the pinned magnetic layer 23 shown in Fig. 13 is brought into a single domain state in the Y-direction and held stationary, but the hard bias layers 29, 29 magnetized in the direction opposing to the X1-direction are provided on both sides of the pinned magnetic layer 23. Therefore, opposite ends of the pinned magnetic layer 23 are so affected by the bias magnetic field from the hard bias layers 29, 29 that it is difficult to hold the magnetization direction of the pinned magnetic layer 23 stationary in the Y-direction shown in Fig. 13.

More specifically, under the effect of magnetization of the hard bias layers 29, 29 in the direction opposing to the X1-direction, the magnetization of the free magnetic layer 25, which is brought into a single domain state in the direction opposing to the X1-direction, and the magnetization of the pinned magnetic layer 23 are hard to cross in orthogonal relation, especially, in the vicinity of the lateral ends of the multilayer

film 33. The reason why the magnetization of the free magnetic layer 25 and the magnetization of the pinned magnetic layer 23 are held in orthogonal relation, resides in that the magnetization of the free magnetic layer 25 can be easily varied even with a small external magnetic field and electrical resistance can be greatly changed in such a condition, thus resulting in an improvement of reproduction sensitivity. Further, with the orthogonal relation between both the magnetization directions, an output signal waveform having better symmetry can be obtained.

Additionally, the magnetization of the free magnetic layer 25 in the vicinity of lateral ends thereof tends to be undesirably held stationary because of a strong effect of the magnetization of the hard bias layers 29, 29, and hence tends to vary less sensitively upon application of an external magnetic field. As shown in Fig. 13, therefore, dead areas in which reproduction sensitivity is poor are formed in the vicinity of the lateral ends of the multilayer film 33.

Of the multilayer film 33, a central portion except for the opposite dead areas serves as a sensitive area that actually contributes to reproduction of a recorded magnetic field and develops a magnetoresistance effect. A width of the sensitive area is shorter than the track width  $T_w$  set in formation of the multilayer film 33 by widths of the opposite dead areas. Also, due to variations in widths of the opposite dead areas, it is

difficult to precisely define the track width. This results in a problem of difficulty in narrowing the track width to be adapted for a higher recording density.

In the spin-valve type magnetoresistive sensor shown in Fig. 14, the magnetization direction of the free magnetic layer is uniformly arranged so as to cross the magnetization direction of the pinned magnetic layer at 90° based on exchange biasing by using the bias layers made of an antiferromagnetic material.

The exchange biasing is more suitable for a spin-valve type magnetoresistive sensor having a narrower track width to be adapted for a higher recording density in comparison with hard biasing wherein it is difficult to precisely control an effective track width due to the presence of the dead areas.

However, the spin-valve type magnetoresistive sensor shown in Fig. 14 has a problem of corrosion because the antiferromagnetic layer 22 is formed of a Ni-Mn alloy. Also, in the spin-valve type magnetoresistive sensor including the antiferromagnetic layer 22 formed of a Ni-Mn alloy or a Fe-Mn alloy, another problem is encountered in that the antiferromagnetic layer 22 is corroded by, e.g., a weak alkaline solution, containing sodium tripolyphosphate or the like, and an emulsifier which are used in manufacturing steps of the magnetoresistive head, and hence the exchange anisotropic magnetic field is reduced.

Further, since the antiferromagnetic layer 22 is formed

of a Ni-Mn alloy, antiferromagnetic materials usable as the bias layers 26, 26 are restricted. This has necessarily raised such a drawback that the bias layers 26, 26 are poor in heat resistance and corrosion resistance. More specifically, to form the bias layers 26, 26 having high heat resistance, an antiferromagnetic material such as a Ni-Mn alloy must be selected which can develop an exchange anisotropic magnetic field in the direction opposing to the X1-direction at the interface between the bias layers 26, 26 and the free magnetic layer 25 when heat treatment is carried out under a magnetic field crossing the exchange anisotropic magnetic field that acts in the Y-direction in Fig. 14 at the interface between the antiferromagnetic layer 22 formed of an Ni-Mn alloy and the pinned magnetic layer 23.

During the heat treatment under the above-mentioned magnetic field, however, the exchange anisotropic magnetic field acting at the interface between the antiferromagnetic layer 22 and the pinned magnetic layer 23 is inclined from the Y-direction toward the direction opposing to the X1-direction. Accordingly, the magnetization direction of the pinned magnetic layer 23 and the magnetization direction of the free magnetic layer 25 are out of the orthogonal relation, thus resulting in a problem that an output signal waveform has poor symmetry.

For the bias layers 26, 26, it has been therefore required to select an antiferromagnetic material that does not require heat treatment under a magnetic field and can generate an

exchange anisotropic magnetic field immediately after the formation under a magnetic field.

For the above reason, the bias layers 26, 26 are generally formed of a FeMn alloy which belongs to the face-centered cubic system and has an irregular crystal structure.

However, when the spin-valve type magnetoresistive sensor shown in Fig. 14 is provided in a magnetic recording device or the like, the sensor is subjected to a high temperature over 100°C due to a temperature rise in the device and Joule heat produced by a detection electric current. This reduces the exchange anisotropic magnetic field to such an extent that it is difficult to hold the free magnetic layer 25 in a single domain state. As a result, a problem of causing the Barkhausen noise has occurred.

Another problem is that, because the Fe-Mn alloy is poorer in corrosion resistance than the Ni-Mn alloy, the bias layers are corroded by, e.g., a weak alkaline solution, containing sodium tripolyphosphate or the like, and an emulsifier which are used in manufacturing steps of the magnetoresistive head, and hence the exchange anisotropic magnetic field is reduced. In addition, corrosion of the bias layers further proceeds in the magnetic recording device, whereby durability of the device deteriorates.

In the manufacturing method of the conventional spin-valve type magnetoresistive sensor shown in Figs. 15 - 17, the surface of the uppermost one of the layers formed between the substrate

and the bias layers is exposed to the atmosphere in the step of forming the lift-off resist 351 shown in Fig. 16. The surface having been exposed to the atmosphere must be cleaned by ion milling or reverse sputtering with rare gas, such as Ar, before forming another layer on the exposed surface. This results in a problem of increasing the number of manufacturing steps. Further, the necessity of cleaning the surface of the uppermost layer by ion milling or reverse sputtering raises another problem attributable to the cleaning, such as an adverse effect upon generation of the exchange anisotropic magnetic field caused by contamination with foreign matters deposited again on the surface or disorder of the crystal state at the surface.

In the spin-valve type magnetoresistive sensor MR3 shown in Fig. 18, a strong magnetic field is applied to the first free magnetic layer 177 from tip portions 126a, 126a of the hard bias layers 126, 126 in the vicinity of upper lateral ends of the laminate a12, and this magnetic field is opposed to the direction of a magnetic field to be applied to the first free magnetic layer 177. Therefore, when the magnetic field generated by the hard bias layers 126, 126 becomes greater than a later-described spin flop magnetic field ( $H_{sf}$ ), a magnetic field opposing to the direction of the magnetic field, which is intended to be applied to the first free magnetic layer 177, acts upon opposite end portions of the first free magnetic layer 177 (i.e., portions thereof adjacent to the corresponding hard bias layers 126). As

a result, the magnetization direction of the first free magnetic layer 177 in its central portion is uniformly arranged in a direction opposing to the magnetization direction of the second free magnetic layer 178 (i.e., in the direction opposing to the X1-direction), whereas the magnetization direction of the first free magnetic layer 177 in its opposite end portions is disordered.

With the magnetization direction disordered in the opposite end portions of the first free magnetic layer 177, the second free magnetic layer 178, of which magnetization direction is to be uniformly arranged (in the X1-direction) in antiparallel relation to the magnetization direction of the first free magnetic layer 177, is brought into such a state that the magnetization direction of the second free magnetic layer 178 in its central portion is uniformly arranged in a direction opposing to the magnetization direction of the first free magnetic layer 177 (i.e., in the X1-direction), whereas the magnetization direction of the second free magnetic layer 178 in its opposite end portions is disordered. Accordingly, the magnetization directions of the first and second free magnetic layers 177, 178 in their opposite end portions are no longer arranged in antiparallel relation. This may accompany a risk of lowering stability of a reproduced waveform at both ends of the track width Tw and hence causing a problem such as a servo error.



A description is now made of the spin flop magnetic field with reference to Fig. 19. Fig. 19 is a graph showing an M-H curve of the free magnetic layer.

The M-H curve represents changes in magnetization M of the free magnetic layer 175 resulted when an external magnetic field H is applied in the direction of the track width to the free magnetic layer 175 of the spin-valve type magnetoresistive sensor MR3 constructed as shown in Fig. 18. Note that, in Fig. 19, the external magnetic field H corresponds to the bias magnetic field from the hard bias layers 126, 126.

Also, in Fig. 19, arrow  $F_1$  represents the magnetization direction of the first free magnetic layer 177, and arrow  $F_2$  represents the magnetization direction of the second free magnetic layer 178.

As shown in Fig. 19, when the external magnetic field H is small, the first free magnetic layer 177 and the second free magnetic layer 178 are in the antiferromagnetically coupled state; namely, the directions of arrows  $F_1$  and  $F_2$  are antiparallel. When the magnitude of the external magnetic field H exceeds a certain value, the directions of arrows  $F_1$  and  $F_2$  are not antiparallel and the antiferromagnetic coupling between the first free magnetic layer 177 and the second free magnetic layer 178 is broken, whereby the free magnetic layer 175 can no longer maintain a ferrimagnetic state. This phenomenon is called spin flop transition. Also, the magnitude of the external magnetic

field at the time of occurrence of the spin flop transition is called a spin flop magnetic field that is shown by  $H_{sf}$  in Fig. 19. When the external magnetic field  $H$  continues to be increased beyond the spin flop magnetic field  $H_{sf}$ , the direction of arrow  $F_1$  is further rotated and then becomes parallel to the direction of arrow  $F_2$ ; namely, arrow  $F_1$  is pointed in a direction  $180^\circ$  different from the original direction. Thus, the ferrimagnetic state is completely broken. The magnitude of the external magnetic field corresponding to that condition is called a saturation magnetic field that is shown by  $H_s$  in Fig. 19.

Accordingly, the magnetization directions of the first and second free magnetic layers 177, 178 in their opposite end portions, shown in Fig. 19, are disordered to a larger extent in the opposite end portions of the first free magnetic layer 177 as indicated, by way of example, by arrows  $F_1$  depicted in an area of the first free magnetic layer 177 in Fig. 20. Because of tendency to hold the antiparallel relation in the ferrimagnetic state corresponding to the magnetization direction of the first free magnetic layer 177, the magnetization direction of the second free magnetic layer 178 is also disordered as indicated, by way of example, by arrows  $F_2$  depicted in an area of the second free magnetic layer 178 in Fig. 20. In the spin-valve type magnetoresistive sensor MR3 constructed as shown in Fig. 18, therefore, there has been a risk of lowering

stability of a reproduced waveform at both ends of the track width Tw and hence causing a problem such as a servo error. To describe in more detail the magnetization state shown in Fig. 20, a strong magnetic field is applied in an opposing direction to the left and right opposite ends of the first free magnetic layer 177 from the hard bias layers 126, 126, whereby magnetization distribution in the second free magnetic layer 178 is also disordered. This invites the occurrence of Barkhausen noise or the like and deteriorates magnetic stability.

#### SUMMARY OF THE INVENTION

With the view of solving the problems set forth above, an object of the present invention is to provide a spin-valve type magnetoresistive sensor which is superior in heat resistance and corrosion resistance by improvement in a material of a bias layer. Another object of the present invention is to provide a spin-valve type magnetoresistive sensor having a bias structure that enables magnetization direction of a free magnetic layer to be uniformly arranged with certainty.

Still another object of the present invention is to provide a spin-valve type magnetoresistive sensor which is structured such that a free magnetic layer is separated into two layers and magnetization is less susceptible to less disorder in opposite end portions of each free magnetic layer even with employment of a structure of applying a bias to the free magnetic layer,

and which can render the bias to act in a satisfactory manner, suppress the occurrence of Barkhausen noise, and improve magnetic stability.

Still another object of the present invention is to provide a method of manufacturing the spin-valve type magnetoresistive sensor, which enables magnetization direction of the free magnetic layer and magnetization direction of a pinned magnetic layer to be easily set in orthogonal relation.

Still another object of the present invention is to provide a highly reliable magnetoresistive head including the spin-valve type magnetoresistive sensor, which is superior in heat resistance and corrosion resistance, and which can develop a satisfactory exchange anisotropic magnetic field.

To achieve the above objects, the present invention has the following features.

A spin-valve type magnetoresistive sensor according to the present invention comprises, on a substrate, an antiferromagnetic layer; a pinned magnetic layer formed on the antiferromagnetic layer and having a magnetization direction made stationary under an exchange anisotropic magnetic field generated by interaction with the antiferromagnetic layer; a non-magnetic electrically conductive layer formed between a free magnetic layer and the pinned magnetic layer; soft magnetic layers arranged in contact with the free magnetic layer while a spacing corresponding to a track width is left between the soft

magnetic layers; bias layers formed in contact with the soft magnetic layers and acting to uniformly arrange a magnetization direction of the free magnetic layer in a direction crossing the magnetization direction of the pinned magnetic layer; and electrically conductive layers for applying a detection electric current to the free magnetic layer, the antiferromagnetic layer and the bias layer being each made of an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn.

With the spin-valve type magnetoresistive sensor of the present invention, since the antiferromagnetic layer and the bias layer are each made of the above-mentioned alloy, the exchange anisotropic magnetic field has a good temperature characteristic, and a spin-valve type magnetoresistive sensor being superior in heat resistance and corrosion resistance is provided.

Also, the spin-valve type magnetoresistive sensor has good durability even when it is provided in a device such as a magnetoresistive head in which the temperature reaches a high level, and exhibits a less variation in the exchange anisotropic magnetic field (exchange-coupled magnetic field) with a temperature change.

Further, by forming the antiferromagnetic layer of the above-mentioned alloy, the blocking temperature can be raised and a greater exchange anisotropic magnetic field can be

generated in the antiferromagnetic layer. As a result, the magnetization direction of the pinned magnetic layer can be firmly held stationary.

Additionally, because of the soft magnetic layer formed between the free magnetic layer and the bias layer, the magnetization direction of the free magnetic layer can be uniformly arranged with certainty.


In the above spin-valve type magnetoresistive sensor, at least one of the pinned magnetic layer and the free magnetic layer is divided into two layers with a non-magnetic intermediate layer interposed between the two layers, and the divided two layers are held in a ferrimagnetic state where these layers are magnetized in directions 180° different from each other.

In the spin-valve type magnetoresistive sensor wherein at least the pinned magnetic layer is divided into two layers with a non-magnetic intermediate layer interposed between the two layers, one of the divided two pinned magnetic layers serves to make the magnetization of the other layer stationary in a proper direction, and therefore the magnetized state of the pinned magnetic layer can be held in a very stable condition.

On the other hand, in the spin-valve type magnetoresistive sensor wherein at least the free magnetic layer is divided into two layers with a non-magnetic intermediate layer interposed between the two layers, an exchange-coupled magnetic field is generated between the divided two free magnetic layers so that

these layers are brought into the ferrimagnetic state and magnetization of each layer can rotate with good sensitivity in response to an external magnetic field.

In the above spin-valve type magnetoresistive sensor, preferably, the antiferromagnetic layer is made of an alloy having the following composition formula;




where X is at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir and Os, and a composition ratio  $m$  satisfies  $48 \text{ atom \%} \leq m \leq 60 \text{ atom \%}$ . More preferably, the composition ratio  $m$  satisfies  $48 \text{ atom \%} \leq m \leq 58 \text{ atom \%}$ .

In the above spin-valve type magnetoresistive, preferably, the bias layer is made of an alloy having the following composition formula;



where X is at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir and Os, and a composition ratio  $m$  satisfies  $52 \text{ atom \%} \leq m \leq 60 \text{ atom \%}$ .


Also, in the above spin-valve type magnetoresistive sensor, preferably, the antiferromagnetic layer is made of an alloy having the following composition formula;



where D is at least one or more elements selected from among Pd, Rh, Ru, Ir and Os, and composition ratios  $m, n$  satisfy  $48 \text{ atom \%} \leq m + n \leq 60 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq n \leq 40 \text{ atom \%}$ . More


preferably, the composition ratios  $m$ ,  $n$  satisfy  $48 \text{ atom \%} \leq m + n \leq 58 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq n \leq 40 \text{ atom \%}$ .

In the above spin-valve type magnetoresistive sensor, preferably, the bias layer is made of an alloy having the following composition formula;



where D is at least one or more elements selected from among Pd, Rh, Ru, Ir and Os, and composition ratios  $m$ ,  $n$  satisfy  $52 \text{ atom \%} \leq m + n \leq 60 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq n \leq 40 \text{ atom \%}$ .


Furthermore, in the above spin-valve type magnetoresistive sensor, the antiferromagnetic layer may be made of an alloy having the following composition formula;



where L is at least one or more elements selected from among Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, and composition ratios  $q$ ,  $j$  satisfy  $48 \text{ atom \%} \leq q + j \leq 60 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq j \leq 10 \text{ atom \%}$ .

More preferably, the composition ratios  $q$ ,  $j$  satisfy  $48 \text{ atom \%} \leq q + j \leq 58 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq j \leq 10 \text{ atom \%}$ .

In the above spin-valve type magnetoresistive sensor, the bias layer may be made of an alloy having the following composition formula;




where L is at least one or more elements selected from among Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, and composition ratios  $q$ ,  $j$



satisfy  $52 \text{ atom } \% \leq q + j \leq 60 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq j \leq 10 \text{ atom } \%$ .

In particular, when the antiferromagnetic layer and the bias layer are made of an alloy having the same composition, the following combinations (1) to (3) are suitably employed in the spin-valve type magnetoresistive sensor of the present invention.


(1) Preferably, the alloy making up the antiferromagnetic layer and the bias layer has the following composition and composition ratio;



where X is at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir and Os, and the composition ratio  $m$  satisfies  $52 \text{ atom } \% \leq m \leq 60 \text{ atom } \%$ .

More preferably, the composition ratio  $m$  of the antiferromagnetic layer and the bias layer satisfies  $52 \text{ atom } \% \leq m \leq 56.3 \text{ atom } \%$ .


(2) Preferably, the alloy making up the antiferromagnetic layer and the bias layer has the following composition and composition ratio;



where L is at least one or more elements selected from among Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, and the composition ratios  $q, j$  satisfy  $52 \text{ atom } \% \leq q + j \leq 60 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq j \leq 10 \text{ atom } \%$ .

More preferably, the composition ratios  $q$ ,  $j$  of the antiferromagnetic layer and the bias layer satisfy  $52 \text{ atom } \% \leq q + j \leq 56.3 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq j \leq 10 \text{ atom } \%$ .

(3) Preferably, the alloy making up the antiferromagnetic layer and the bias layer has the following composition and composition ratio;



where D is at least one or more elements selected from among Pd, Rh, Ru, Ir and Os, and the composition ratios  $m$ ,  $n$  satisfy  $52 \text{ atom } \% \leq m + n \leq 60 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq n \leq 40 \text{ atom } \%$ .

More preferably, the composition ratios  $m$ ,  $n$  of the antiferromagnetic layer and the bias layer satisfy  $52 \text{ atom } \% \leq m + n \leq 56.3 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq n \leq 40 \text{ atom } \%$ .

When the antiferromagnetic layer and the bias layer are made of alloys having different compositions, the following combinations (4) to (6) are suitably employed.

(4) Preferably, the bias layer is made of an alloy expressed by a composition formula  $\text{X}_m\text{Mn}_{100-m}$  (where X is at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir and Os, and the composition ratio  $m$  satisfies  $52 \text{ atom } \% \leq m \leq 60 \text{ atom } \%$ ), whereas the antiferromagnetic layer is made of an alloy expressed by a composition formula  $\text{X}_m\text{Mn}_{100-m}$  (where X is at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir and Os, and the composition ratio  $m$  satisfies  $48 \text{ atom } \% \leq m \leq 58 \text{ atom } \%$ ).

More preferably, the composition ratio  $m$  of the bias layer

satisfies  $52 \text{ atom } \% \leq m \leq 54 \text{ atom } \%$  or  $56.8 \text{ atom } \% \leq m \leq 60 \text{ atom } \%$ .

(5) Preferably, the bias layer is made of an alloy expressed by a composition formula  $\text{Pt}_q\text{Mn}_{100-q-j}\text{L}_j$  (where L is at least one or more elements selected from among Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, and the composition ratios  $q, j$  satisfy  $52 \text{ atom } \% \leq q + j \leq 60 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq j \leq 10 \text{ atom } \%$ , whereas the antiferromagnetic layer is made of an alloy expressed by a composition formula  $\text{Pt}_q\text{Mn}_{100-q-j}\text{L}_j$  (where L is at least one or more elements selected from among Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, and the composition ratios  $q, j$  satisfy  $48 \text{ atom } \% \leq q + j \leq 58 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq j \leq 10 \text{ atom } \%$ .

More preferably, the composition ratios  $q, j$  of the bias layer satisfy  $52 \text{ atom } \% \leq q + j \leq 54 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq j \leq 10 \text{ atom } \%$ , or  $56.8 \text{ atom } \% \leq q + j \leq 60 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq j \leq 10 \text{ atom } \%$ .

(6) Preferably, the bias layer is made of an alloy expressed by a composition formula  $\text{Pt}_m\text{Mn}_{100-m-n}\text{D}_n$  (where D is at least one or more elements selected from among Pd, Rh, Ru, Ir and Os, and the composition ratios  $m, n$  satisfy  $52 \text{ atom } \% \leq m + n \leq 60 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq n \leq 40 \text{ atom } \%$ , whereas the antiferromagnetic layer is made of an alloy expressed by a composition formula  $\text{Pt}_m\text{Mn}_{100-m-n}\text{D}_n$  (where D is at least one or more elements selected from among Pd, Rh, Ru, Ir and Os, and the composition ratios  $m, n$  satisfy  $48 \text{ atom } \% \leq m + n \leq 58 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq n \leq 40 \text{ atom } \%$ .

More preferably, the composition ratios  $m$ ,  $n$  of the bias layer satisfy  $52 \text{ atom } \% \leq m + n \leq 54 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq n \leq 40 \text{ atom } \%$ , or  $56.8 \text{ atom } \% \leq m + n \leq 60 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq n \leq 40 \text{ atom } \%$ .

In the above spin-valve type magnetoresistive sensor, preferably, the soft magnetic layer is made of a NiFe alloy.

In the present invention, the spin-valve type magnetoresistive sensor may have such a structure that recesses are formed in the free magnetic layer on both sides of an area corresponding to a track width, the soft magnetic layers are formed to fill the recesses and are directly joined to the free magnetic layer through bottom surfaces of the recesses, and the bias layers and the electrically conductive layers are successively formed on the soft magnetic layers.

Generally, exchange coupling at the interface between a ferromagnetic substance and an antiferromagnetic substance tends to be more easily affected by contamination or disorder of crystallinity at the interface than exchange coupling at the interface between a ferromagnetic substance and a ferromagnetic substance. Therefore, the soft magnetic layer and the bias layer require to be successively formed in the same film forming apparatus. If the soft magnetic layers are formed without providing the recesses in the free magnetic layer, a total value of (thickness of ferromagnetic film  $\times$  saturation magnetization) in areas on both sides of the track width is much greater than

a value of (thickness of ferromagnetic film  $\times$  saturation magnetization) of the free magnetic layer. The intensity of a longitudinal bias applied to the free magnetic layer is proportional to a value obtained by dividing the total value of (thickness of ferromagnetic film  $\times$  saturation magnetization) by the value of (thickness of ferromagnetic film  $\times$  saturation magnetization) of the free magnetic layer. In the case of not providing the recesses, therefore, the longitudinal bias becomes stronger than necessary, which may invite a problem of causing dead areas at both ends of a track or deteriorating sensitivity of the sensor as a whole. Also, if the soft magnetic layer is too thick, there may occur such a drawback that a state of the longitudinal bias is changed even with a slight external magnetic field and a reproduced waveform becomes unstable, because an exchange-coupled magnetic field between the bias layer and the soft magnetic layer is reduced in reverse proportion to a film thickness. The above drawback can be remedied by setting the thickness of the soft magnetic layer as thin as possible. However, if the soft magnetic layer is too thin, there conversely arises such a problem that the exchange-coupled magnetic field between the bias layer and the soft magnetic layer is deteriorated for the reason, for example, that the soft magnetic layer cannot maintain satisfactory integrity of crystallinity. In the case of providing the recesses, an increased film thickness of the soft magnetic layer is partly canceled

corresponding to a depth of the recesses in terms of total thickness. As a result, the longitudinal bias is surely avoided from becoming stronger than necessary, and the exchange-coupled magnetic field between the bias layer and the soft magnetic layer is surely avoided from deteriorating, thus resulting in a first advantage that reproduction sensitivity, controllability of the track width, and stability of the reproduced waveform can be improved.

A second advantage is as follows. By cutting the free magnetic layer to form the recesses by ion milling, etc., contaminants on the surface of the free magnetic layer can be effectively removed, and ferromagnetic exchange coupling between the soft magnetic layer and the free magnetic layer can be further enhanced to more effectively transmit the longitudinal bias to the free magnetic layer. Also, even in the case where a backed layer made of Cu, for example, or an oxidation preventive layer made of Ta, for example, is formed on the free magnetic layer, the surface of a ferromagnetic substance making up the free magnetic layer can be surely exposed by forming the recesses.

In the present invention, the spin-valve type magnetoresistive sensor may have such a structure that the free magnetic layer is divided into two layers with a non-magnetic intermediate layer interposed between the two layers, and assuming that one free magnetic layer farther away from the

pinned magnetic layer is a first free magnetic layer and the other free magnetic layer closer to the pinned magnetic layer is a second free magnetic layer, a magnetic film thickness of the first free magnetic layer is smaller than a magnetic film thickness of the second free magnetic layer.

Moreover, the above-mentioned objects of the present invention can be achieved with a method of manufacturing a spin-valve type magnetoresistive sensor comprising the steps of forming an antiferromagnetic layer, a pinned magnetic layer, a non-magnetic electrically conductive layer, and a free magnetic layer successively on a substrate, thereby forming a first laminate; heat-treating the first laminate at a first heat treatment temperature while applying a first magnetic field in a direction perpendicular to a direction of a track width, thereby generating an exchange anisotropic magnetic field in the antiferromagnetic layer to make magnetization of the pinned magnetic layer stationary; forming soft magnetic layers on the first laminate while a spacing corresponding to the track width is left between the soft magnetic layers, forming bias layers on the soft magnetic layers, and forming electrically conductive layers on the bias layers for applying a detection electric current to the free magnetic layer, thereby forming a second laminate; and heat-treating the second laminate at a second heat treatment temperature while applying a second magnetic field smaller than the exchange anisotropic magnetic field of the

antiferromagnetic layer in a direction of the track width, thereby imparting a bias magnetic field to the free magnetic layer in a direction crossing a magnetization direction of the pinned magnetic layer.

In the above method of manufacturing a spin-valve type magnetoresistive sensor, preferably, the antiferromagnetic layer and the bias layers are each made of an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn.

Also, in the above method of manufacturing a spin-valve type magnetoresistive sensor, preferably, the first heat treatment temperature is in a range of 220°C - 270°C.

Further, in the above method of manufacturing a spin-valve type magnetoresistive sensor, preferably, the second heat treatment temperature is in a range of 250°C - 270°C.

In the above method of manufacturing a spin-valve type magnetoresistive sensor, preferably, the second magnetic field is in a range of 10 - 600 Oe (800 - 48000 A/m).

Fig. 21 is a graph showing the relationship between a heat treatment temperature and an exchange anisotropic magnetic field of an antiferromagnetic layer in each of a bottom type spin-valve magnetoresistive sensor and a top type spin-valve magnetoresistive sensor.

As seen from Fig. 21, in the bottom type spin-valve magnetoresistive sensor wherein the distance between the



antiferromagnetic layer and a substrate is shorter (namely, the antiferromagnetic layer is disposed under a pinned magnetic layer), the exchange anisotropic magnetic field of the antiferromagnetic layer (indicated by marks ■) is generated already at 200°C and exceeds 600 (Oe) near 240°C. On the other hand, in the top type spin-valve magnetoresistive sensor wherein the distance between the antiferromagnetic layer and the substrate is longer than that in the bottom type spin-valve magnetoresistive sensor (namely, the antiferromagnetic layer is disposed on the pinned magnetic layer), the exchange anisotropic magnetic field of the antiferromagnetic layer (indicated by marks ◆) is generated nearly at 240°C and exceeds 600 (Oe) (48000 A/m) near 260°C.

It is therefore understood that the antiferromagnetic layer of the bottom type spin-valve magnetoresistive sensor, in which the distance between the antiferromagnetic layer and the substrate is shorter (namely, the antiferromagnetic layer is disposed under the pinned magnetic layer), exhibits a greater exchange anisotropic magnetic field at a relatively low heat treatment temperature than the top type spin-valve magnetoresistive sensor wherein the distance between the antiferromagnetic layer and the substrate is longer than that in the bottom type spin-valve magnetoresistive sensor (namely, the antiferromagnetic layer is disposed on the pinned magnetic layer).

Thus, the spin-valve type magnetoresistive sensor of the present invention is constructed as a bottom type spin-valve magnetoresistive sensor wherein the distance between the antiferromagnetic layer and the substrate is shorter, and the bias layer formed of the same material as the alloy used for the antiferromagnetic layer is disposed in a position farther from the substrate than the antiferromagnetic layer. Additionally, in the bottom type spin-valve magnetoresistive sensor wherein the distance between the antiferromagnetic layer and the substrate is shorter, the antiferromagnetic layer is disposed under the pinned magnetic layer, while in the top type spin-valve magnetoresistive sensor wherein the distance between the antiferromagnetic layer and the substrate is longer than that in the bottom type spin-valve magnetoresistive sensor, the antiferromagnetic layer is disposed on the pinned magnetic layer.

Accordingly, in the method of manufacturing the spin-valve type magnetoresistive sensor of the present invention, by carrying out heat treatment on the first laminate at the first heat treatment temperature (220 - 270°C) while applying the first magnetic field, an exchange anisotropic magnetic field is generated in the antiferromagnetic layer and the magnetization direction of the pinned magnetic layer is made stationary uniformly. Also, the exchange anisotropic magnetic field of the antiferromagnetic layer exceeds 600 Oe.

Then, by carrying out heat treatment on the second laminate at the second heat treatment temperature (250 - 270°C) while applying the second magnetic field 10 - 600 Oe (800 - 48000 Oe) in a direction perpendicular to the first magnetic field, an exchange anisotropic magnetic field is generated in the bias layer and the magnetization direction of the free magnetic layer is uniformly arranged in a direction crossing the first magnetic field. Also, the exchange anisotropic magnetic field of the bias layer exceeds 600 Oe (48000 A/m).

In the above process, by setting the second magnetic field to be smaller than the exchange anisotropic magnetic field of the antiferromagnetic layer that has been generated by the preceding first heat treatment, the exchange anisotropic magnetic field of the antiferromagnetic layer is not deteriorated even with application of the second magnetic field to the antiferromagnetic layer. The magnetization direction of the pinned magnetic layer can be thereby maintained stationary.

As a result, the magnetization direction of the pinned magnetic layer and the magnetization direction of the free magnetic layer can be held in crossing relation.

Thus, with the method of manufacturing the spin-valve type magnetoresistive sensor according to the present invention, since an alloy having superior heat resistance, such as a PtMn alloy, is used for not only the antiferromagnetic layer but also the bias layer, an exchange anisotropic magnetic field can be

generated in the bias layer to make the magnetization direction of the free magnetic layer uniformly arranged in a direction crossing the magnetization direction of the pinned magnetic layer without adversely affecting the magnetization direction of the pinned magnetic layer. It is therefore possible to uniformly arrange the magnetization direction of the free magnetic layer in the direction crossing the magnetization direction of the pinned magnetic layer, and hence to provide a spin-valve type magnetoresistive sensor having superior heat resistance.

Also, with the method of manufacturing the spin-valve type magnetoresistive sensor, the soft magnetic layers are formed on the first laminate, and the bias layers are formed on the soft magnetic layers. After forming the soft magnetic layers, therefore, the bias layers can be formed without breaking a vacuum. This means no necessity of cleaning a surface, on which the bias layers are to be formed, by ion milling or reverse sputtering. As a result, the manufacturing method is superior in being free from a drawback attributable to the cleaning, such as an adverse effect upon generation of the exchange anisotropic magnetic field caused by contamination with foreign matters deposited again on the surface or disorder of the crystal state at the surface.

Additionally, in a magnetoresistive head of the present invention, the spin-valve type magnetoresistive sensor

described above is provided on a slider.

With the above feature, a highly reliable magnetoresistive head can be obtained which is superior in durability, heat resistance and corrosion resistance, and which can generate an exchange anisotropic magnetic field at a sufficient level.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a sectional view showing the structure of a spin-valve type magnetoresistive sensor according to a first embodiment of the present invention, as viewed from the side facing a recording medium;

Fig. 2 is a sectional view for explaining a method of manufacturing the spin-valve type magnetoresistive sensor shown in Fig. 1, showing a state where a first laminate is formed on a substrate;

Fig. 3 is a sectional view for explaining the method of manufacturing the spin-valve type magnetoresistive sensor shown in Fig. 1, showing a state where a lift-off resist is formed;

Fig. 4 is a sectional view for explaining the method of manufacturing the spin-valve type magnetoresistive sensor shown in Fig. 1, showing a state where a bias layer and an electrically conductive layer are formed;

Fig. 5 is a perspective view showing a magnetoresistive head including the spin-valve type magnetoresistive sensor according to the first embodiment of the present invention;

Fig. 6 is a sectional view showing a principal part of the magnetoresistive head including the spin-valve type magnetoresistive sensor according to the first embodiment of the present invention;

Fig. 7 is a sectional view showing a spin-valve type magnetoresistive sensor according to a second embodiment of the present invention;

Fig. 8 is a sectional view showing the structure of the spin-valve type magnetoresistive sensor shown in Fig. 7, as viewed from the side facing a recording medium;

Fig. 9 is a sectional view showing a spin-valve type magnetoresistive sensor according to a third embodiment of the present invention;

Fig. 10 is a sectional view showing the structure of the spin-valve type magnetoresistive sensor shown in Fig. 9, as viewed from the side facing a recording medium;

Fig. 11 is a sectional view showing the structure of a spin-valve type magnetoresistive sensor according to a fourth embodiment of the present invention, as viewed from the side facing a recording medium;

Fig. 12 is a sectional view showing a state where a lift-off resist is formed on a first free magnetic layer in a process for manufacturing the structure shown in Fig. 1;

Fig. 13 is a sectional view showing the structure of one example of conventional spin-valve type magnetoresistive

sensors, as viewed from the side facing recording medium;

Fig. 14 is a sectional view showing the structure of another example of conventional spin-valve type magnetoresistive sensors, as viewed from the side facing a recording medium;

Fig. 15 is a sectional view for explaining a method of manufacturing the conventional spin-valve type magnetoresistive sensor shown in Fig. 14, showing a state where a first laminate is formed on a substrate;

Fig. 16 is a sectional view for explaining the method of manufacturing the conventional spin-valve type magnetoresistive sensor shown in Fig. 14, showing a state where a lift-off resist is formed of the first laminate;

Fig. 17 is a sectional view for explaining the method of manufacturing the conventional spin-valve type magnetoresistive sensor shown in Fig. 14, showing a state where a bias layer and an electrically conductive layer are formed;

Fig. 18 is a sectional view showing the structure of still another example of conventional spin-valve type magnetoresistive sensors;

Fig. 19 is a graph showing magnetization directions of respective layers of a two-layered free magnetic layer depending on the intensity of an external magnetic field in the case where a free magnetic layer in the spin-valve type magnetoresistive sensor having the structure shown in Fig. 18 is separated into two layers;

Fig. 20 is an illustration showing magnetization directions of first and second free magnetic layers in the spin-valve type magnetoresistive sensor having the structure shown in Fig. 18;

Fig. 21 is a graph showing dependency, upon a heat treatment temperature, of an exchange anisotropic magnetic field of an alloy having a composition of  $\text{Pt}_{55.4}\text{Mn}_{44.6}$  and an alloy having a composition of  $\text{Pt}_{54.4}\text{Mn}_{45.6}$ ;

Fig. 22 is a graph showing dependency, upon a Pt concentration (composition ratio  $m$ ), of an exchange anisotropic magnetic field of an alloy having a composition of  $\text{Pt}_m\text{Mn}_{100-m}$ ;

Fig. 23 is a sectional view showing the structure of one exemplary spin-valve type magnetoresistive sensor used in measurement of data shown in the graphs of Figs. 21 and 22, as viewed from the side facing a recording medium;

Fig. 24 is a sectional view showing the structure of another exemplary spin-valve type magnetoresistive sensor used in measurement of data shown in the graphs of Figs. 21 and 22, as viewed from the side facing a recording medium;

Fig. 25 is an illustration showing magnetization directions of first and second free magnetic layers in the spin-valve type magnetoresistive sensor employing the structure according to the present invention;

Fig. 26 is a graph showing asymmetry in a magnetoresistive head employing the conventional structure; and



Fig. 27 is a graph showing asymmetry in the magnetoresistive head employing the structure according to the present invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of a spin-valve type magnetoresistive sensor of the present invention will be described below in detail with reference to the drawings.

##### [First Embodiment]

Fig. 1 is a sectional view showing the structure of a spin-valve type magnetoresistive sensor according to a first embodiment of the present invention, as viewed from the side facing a recording medium. Figs. 5 and 6 are each a perspective view showing a magnetoresistive head including the spin-valve type magnetoresistive sensor according to the first embodiment.

Above and below the spin-valve type magnetoresistive sensor of the present invention, shielding layers are formed with gap layers interposed therebetween. The spin-valve type magnetoresistive sensor, the gap layers, and the shielding layers cooperatively construct a GMR head h1 for reproduction.

An inductive head h2 for recording may be layered on the GMR head h1 for reproduction.

As shown in Fig. 5, the GMR head h1 including the spin-valve type magnetoresistive sensor is provided on a trailing end face 151d of a slider 151 along with the inductive head h2, whereby

a magnetoresistive head 150 is constructed. The magnetoresistive head is able to detect a magnetic field recorded on a magnetic recording medium such as a hard disk.

In Fig. 1, a Z-direction represents the moving direction of a magnetic recording medium, and a Y-direction represents the direction of a leakage magnetic field from the magnetic recording medium.

The magnetoresistive head 150 shown in Fig. 5 mainly comprises the slider 151, and the GMR head h1 and the inductive head h2 which are provided on the trailing end face 151d of a slider 151. Numeral 155 denotes the leading side of the slider 151, i.e., the upstream side in the moving direction of the magnetic recording medium, and numeral 156 denotes the trailing side of the slider 151. Rails 151a, 151a and 15ab are formed on a surface 152 of the slider 151 facing the magnetic recording medium, and air grooves 151c, 151c are formed between the rails.

As shown in Fig. 6, the GMR head h1 comprises an underlying layer 200 made of a non-magnetic insulator, such as  $\text{Al}_2\text{O}_3$ , and formed on the trailing end face 151d of a slider 151; a lower shielding layer 163 made of a magnetic alloy and formed on the underlying layer 200; a lower gap layer 164 formed on the lower shielding layer 163; the spin-valve type magnetoresistive sensor 1 exposed to the outside from the medium facing surface 152; an upper gap layer 166 covering both the spin-valve type magnetoresistive sensor 1 and the lower gap layer 164; and an

upper shielding layer 167 covering the upper gap layer 166.

The upper shielding layer 167 serves also as a lower core layer of the inductive head h2.

The inductive head h2 comprises the lower core layer (upper shielding layer) 167; a gap layer 174 formed on the lower core layer 167; a coil 176; an upper insulating layer 177 covering the coil 176; and an upper core layer 178 joined to the gap layer 174 at one side and to the lower core layer 167 at the other side in a central portion of the coil 176.

The coil 176 is formed in a spiral pattern as viewed from above. Also, a base end portion 178b of the upper core layer 178 is magnetically connected to the lower core layer 167 substantially in the central portion of the coil 176.

Further, a protective layer 179 made of alumina or the like is formed on the upper core layer 178.

The spin-valve type magnetoresistive sensor shown in Fig. 1 is one of the so-called bottom type single-spin -valve magnetoresistive sensors wherein an antiferromagnetic layer, a pinned magnetic layer, a non-magnetic electrically conductive layer, and a free magnetic layer are formed on a substrate one by one in this order.

In the spin-valve type magnetoresistive sensor 1 of this embodiment, a magnetization direction of the free magnetic layer is uniformly arranged so as to cross a magnetization direction of the pinned magnetic layer based on exchange biasing by using

an antiferromagnetic material as a bias layer.

The exchange biasing is more suitable for a spin-valve type magnetoresistive sensor having a narrower track width to be adapted for a higher recording density in comparison with hard biasing wherein it is difficult to precisely control an effective track width due to the presence of dead areas.

In Fig. 1, character K denotes a substrate. An antiferromagnetic layer 2 is formed on the substrate K. Further, a pinned magnetic layer 3 is formed on the antiferromagnetic layer 2, and a non-magnetic electrically conductive layer 4 is formed on the pinned magnetic layer 3. Moreover, a free magnetic layer 5 is formed on the non-magnetic electrically conductive layer 4.


On the free magnetic layer 5, a pair of soft magnetic layers 7, 7 are formed while a spacing corresponding to a track width  $T_w$  is left between the soft magnetic layers 7, 7. A pair of bias layers 6, 6 are formed respectively on the soft magnetic layers 7, 7, and a pair of electrically conductive layers 8, 8 are formed respectively on the bias layers 6, 6.

The substrate K is made by successively forming the underlying layer 200 made of a non-magnetic insulator, such as  $Al_2O_3$  (alumina), on a surface of an  $Al_2O_3$ -TiC based ceramic 151 or the like, and then the lower shielding layer 163 and the lower gap layer 164 on the underlying layer 200 in succession.

The antiferromagnetic layer 2 is made of an alloy


containing at least one or more elements selected from among Pt, Pd, Ir, Rh, Ru, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn. The antiferromagnetic layer 2 made of such an alloy has a feature of being superior in heat resistance and corrosion resistance.

In particular, the antiferromagnetic layer 2 is preferably made of an alloy having the following composition formula;




where X is at least one or more elements selected from among Pt, Pd, Ir, Rh, Ru and Os, and a composition ratio  $m$  satisfies  $48 \text{ atom \%} \leq m \leq 60 \text{ atom \%}$ .

Further, the antiferromagnetic layer 2 may be made of an alloy having the following composition formula;



where D is at least one or more elements selected from among Pd, Ir, Rh, Ru and Os, and composition ratios  $m, n$  satisfy  $48 \text{ atom \%} \leq m + n \leq 60 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq n \leq 40 \text{ atom \%}$ .

Moreover, in the spin-valve type magnetoresistive sensor of this embodiment, it is desired that the antiferromagnetic layer be made of an alloy having the following composition formula;



where L is at least one or more elements selected from among Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, and composition ratios  $q, j$  satisfy  $48 \text{ atom \%} \leq q + j \leq 60 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq j \leq 10$

atom %.

More preferably, the composition ratios  $q, j$  satisfy  $48 \text{ atom \%} \leq q + j \leq 58 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq j \leq 10 \text{ atom \%}$ .

The pinned magnetic layer 3 is formed of, for example, a Co film, a NiFe alloy, a CoNiFe alloy, a CoFe alloy, or a CoNi alloy.

The pinned magnetic layer 3 shown in Fig. 1 is formed in contact with the antiferromagnetic layer 2, and is magnetized under an exchange anisotropic magnetic field due to exchange coupling that is produced at the interface between the pinned magnetic layer 2 and the antiferromagnetic layer 2 when subjected to heat treatment under a magnetic field.

The magnetization direction of the pinned magnetic layer 3 is made stationary in the Y-direction shown in Fig. 1, i.e., the direction away from the magnetic recording medium (direction of height).

The non-magnetic electrically conductive layer 4 is preferably formed of a non-magnetic electrically conductive film of, e.g., Cu, Au or Ag.

Also, the free magnetic layer 5 is preferably made of a similar material to that of the pinned magnetic layer 3.

The free magnetic layer 5 is magnetized under a magnetic field from the bias layers 6, and the magnetization direction of the free magnetic layer 5 is uniformly arranged in a direction opposing to the X1-direction shown in Fig. 1, i.e., a direction

perpendicularly crossing the magnetization direction of the pinned magnetic layer 3.

Because the free magnetic layer 5 is magnetized into a single domain state under the effect of the bias layers 6, the occurrence of Barkhausen noise is prevented.


The soft magnetic layer 7 is made of, for example, Co, Ni, Fe, a CoFe alloy, a CoNiFe alloy, a CoNi alloy, or a NiFe alloy. Above all, the soft magnetic layer 7 is preferably formed of the same alloy as the material of the free magnetic layer 5. In the case where a surface of the free magnetic layer 5 is formed of a NiFe alloy, the soft magnetic layer 7 is preferably formed of the NiFe alloy. The reason is that, by forming the soft magnetic layer 7 of the same material as that of the free magnetic layer 5, ferromagnetic coupling can be more surely developed at the interface between the soft magnetic layer 7 and the free magnetic layer 5, whereby a unidirectional and anisotropic exchange-coupled magnetic field produced at the interface between the bias layer 6 and the soft magnetic layer 7 can be transmitted to the free magnetic layer 5 through the soft magnetic layer 7.

The bias layer 6 is made of, similarly to the antiferromagnetic layer 2, an alloy containing at least one or more elements selected from among Pt, Pd, Ir, Rh, Ru, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn. With heat treatment under a magnetic field, an exchange anisotropic magnetic field is developed at the interface between the bias layer 6 and the

soft magnetic layer 7, the developed exchange anisotropic magnetic field being transmitted to the soft magnetic layer 7. The free magnetic layer 5 is then magnetized in a certain direction due to ferromagnetic coupling produced at the interface between the soft magnetic layer 7 and the free magnetic layer 5.


The bias layer 6 made of such an alloy has a feature of being superior in heat resistance and corrosion resistance.

In particular, the bias layer 6 is preferably made of an alloy having the following composition formula;




where X is at least one or more elements selected from among Pt, Pd, Ir, Rh, Ru and Os, and a composition ratio  $m$  satisfies  $52 \text{ atom } \% \leq m \leq 60 \text{ atom } \%$ .

Further, the bias layer 6 may be made of an alloy having the following composition formula;



where D is at least one or more elements selected from among Pd, Ir, Rh, Ru and Os, and composition ratios  $m, n$  satisfy  $52 \text{ atom } \% \leq m + n \leq 60 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq n \leq 40 \text{ atom } \%$ .

Moreover, in the spin-valve type magnetoresistive sensor of this embodiment, the bias layer may be made of an alloy having the following composition formula;



where L is at least one or more elements selected from among



Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, and composition ratios  $q, j$  satisfy  $52 \text{ atom } \% \leq q + j \leq 60 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq j \leq 10 \text{ atom } \%$ .

The electrically conductive layers 8, 8 are preferably made of, for example, Au, W, Cr or Ta.

In the spin-valve type magnetoresistive sensor 1 shown in Fig. 1, a steady electric current is applied from the electrically conductive layers 8, 8 to the free magnetic layer 5, the non-magnetic electrically conductive layer 4 and the pinned magnetic layer 3. When a leakage magnetic field from the magnetic recording medium traveling in the Z-direction is applied in the Y-direction in the above condition, the magnetization direction of the free magnetic layer 5 is varied from the direction opposing to the  $X_1$ -direction toward the Y-direction. Electrical resistance is changed depending on the relationship between a variation of the magnetization direction in the free magnetic layer 5 and the stationary magnetization direction of the pinned magnetic layer 3. The leakage magnetic field from the magnetic recording medium can be detected in accordance with a voltage change caused by such a change in electrical resistance.

A method of manufacturing the spin-valve type magnetoresistive sensor 1 of this embodiment according to the present invention will be described below.

The manufacturing method is carried out by utilizing such

a property that the magnitude of an exchange anisotropic magnetic field developed upon heat treatment between the antiferromagnetic layer 2 and the bias layers 6, 6 depends on positions of the antiferromagnetic layer 2 and the bias layers 6, 6 in the spin-valve type magnetoresistive sensor 1. The magnetization direction of the pinned magnetic layer 3 is made stationary by first heat treatment, and the magnetization direction of the free magnetic layer 5 is uniformly arranged in a direction crossing the magnetization direction of the pinned magnetic layer 3 by second heat treatment.

More specifically, according to the method of manufacturing the spin-valve type magnetoresistive sensor 1 of this embodiment, the antiferromagnetic layer 2, the pinned magnetic layer 3, the non-magnetic electrically conductive layer 4 and the free magnetic layer 5 are successively formed on the substrate K one above another, thereby forming a first laminate a1 shown in Fig. 2. Then, the first laminate a1 is subjected to heat treatment at a first heat treatment temperature while applying a first magnetic field in a direction perpendicular to the direction of the track width Tw (i.e., in a direction vertical to the drawing sheet of Fig. 2). An exchange anisotropic magnetic field is thereby generated in the antiferromagnetic layer 2 to make the magnetization direction of the pinned magnetic layer 3 stationary.

Next, as shown in Fig. 3, a lift-off resist 351 having a

base end portion with a width corresponding to the track width  $T_w$  is formed. A surface area of the free magnetic layer 5, which is not covered by the lift-off resist 351 serving as a mask, is cleaned by ion milling or reverse sputtering with rare gas, such as Ar.

Then, as shown in Fig. 4, the soft magnetic layers 7, 7 are formed on the exposed surface of the free magnetic layer 5 and the lift-off resist 351 while a spacing corresponding to the track width  $T_w$  is left between the soft magnetic layers 7, 7. Subsequently, the bias layers 6, 6 are formed respectively on the soft magnetic layers 7, 7, and the electrically conductive layers 8, 8 are formed respectively on the bias layers 6, 6. Thereafter, by removing the lift-off resist 351 by etching, a second laminate a2 having the same configuration as the spin-valve type magnetoresistive sensor 1 shown in Fig. 1 is obtained.

The second laminate a2 thus obtained is subjected to heat treatment at a second heat treatment temperature while a second magnetic field smaller than the exchange anisotropic magnetic field in the antiferromagnetic layer 2 is applied in the direction of the track width  $T_w$ . This heat treatment imparts, to the free magnetic layer 5, a bias magnetic field in a direction crossing the magnetization direction of the pinned magnetic layer 3, whereby the spin-valve type magnetoresistive sensor 1 is obtained.

Next, the relationship between a heat treatment temperature and an exchange anisotropic magnetic field of an antiferromagnetic layer will be described in detail with reference to Figs. 21, 22 and 23.

Marks ■ shown in Fig. 21 represents dependency, on the heat treatment temperature, of the exchange anisotropic magnetic field in a bottom type single-spin-valve magnetoresistive sensor wherein an antiferromagnetic layer is disposed between a substrate and a free magnetic layer. Marks ♦ shown in Fig. 21 represents dependency, on the heat treatment temperature, of the exchange anisotropic magnetic field in a top type single-spin-valve magnetoresistive sensor wherein an antiferromagnetic layer is disposed in a position farther away from a substrate than a free magnetic layer.

In other words, the antiferromagnetic layer of the top type single-spin-valve magnetoresistive sensor represented by marks ♦ is disposed in a position farther away from the substrate than the antiferromagnetic layer of the bottom type single-spin-valve magnetoresistive sensor represented by marks ■.

Concretely, in the top type single-spin-valve magnetoresistive sensor represented by marks ♦ shown in Fig. 21, an underlying insulating layer 200 made of  $\text{Al}_2\text{O}_3$  (thickness 1000 Å), an underlying layer 210 made of Ta (thickness 50 Å), a two-layered free magnetic layer 5 comprising a NiFe alloy (thickness 70 Å) and a Co layer (thickness 10 Å), a non-magnetic

electrically conductive layer 4 made of Cu (thickness 30 Å), a pinned magnetic layer 3 made of Co (thickness 25 Å), an antiferromagnetic layer 2 made of  $\text{Pt}_{55.4}\text{Mn}_{44.6}$  (thickness 300 Å), and a protective layer 220 made of Ta (thickness 50 Å) are successively formed on a substrate K made of Si in the order named, as shown in Fig. 24.

Also, in the bottom type single-spin-valve magnetoresistive sensor represented by marks ■ shown in Fig. 21, an underlying insulating layer 200 made of  $\text{Al}_2\text{O}_3$  (thickness 1000 Å), an underlying layer 210 made of Ta (thickness 30 Å), an antiferromagnetic layer 2 made of  $\text{Pt}_{54.4}\text{Mn}_{45.6}$  (thickness 300 Å), a pinned magnetic layer 3 made of Co (thickness 25 Å), a non-magnetic electrically conductive layer 4 made of Cu (thickness 26 Å), a two-layered free magnetic layer 5 comprising a Co layer (thickness 10 Å) and a NiFe alloy (thickness 70 Å), and a protective layer 220 made of Ta (thickness 50 Å) are successively formed on a substrate K made of Si in the order named, as shown in Fig. 23.

Thus, in the top type spin-valve magnetoresistive sensor represented by marks ♦, the antiferromagnetic layer 2 is disposed on the pinned magnetic layer 3, and the free magnetic layer 5, the non-magnetic electrically conductive layer 4 and the pinned magnetic layer 3 are formed between the Si substrate K and the antiferromagnetic layer 2 in sandwiched fashion.

In the bottom type spin-valve magnetoresistive sensor

represented by marks ■, the antiferromagnetic layer 2 is disposed under the pinned magnetic layer 3, and the pinned magnetic layer 3, the non-magnetic electrically conductive layer 4 and the free magnetic layer 5 are not formed between the Si substrate K and the antiferromagnetic layer 2 in this structure.

As shown in Fig. 21, the exchange anisotropic magnetic field of the antiferromagnetic layer ( $\text{Pt}_{55.4}\text{Mn}_{44.6}$ ) represented by marks ■ starts to rise when the heat treatment temperature exceeds 220°C, reaches about 700 (Oe) beyond 240°C, and then becomes almost constant thereafter. Also, the exchange anisotropic magnetic field of the antiferromagnetic layer ( $\text{Pt}_{54.4}\text{Mn}_{45.6}$ ) represented by marks ♦ starts to rise when the heat treatment temperature exceeds 240°C, reaches over 600 (Oe) beyond 260°C, and then becomes constant thereafter.

It is hence understood that the antiferromagnetic layer (marks ■) disposed in a position closer to the substrate exhibits a greater exchange anisotropic magnetic field at a relatively low heat treatment temperature than the antiferromagnetic layer (marks ♦) disposed in a position farther away from the substrate.

The method of manufacturing the spin-valve type magnetoresistive sensor 1 of this embodiment utilizes the above-described property of an antiferromagnetic layer.

Thus, the spin-valve type magnetoresistive sensor 1 of this embodiment is constructed as a bottom type spin-valve magnetoresistive sensor wherein the distance between the

antiferromagnetic layer 2 and the substrate K is shorter (namely, the antiferromagnetic layer 2 is disposed under the pinned magnetic layer 3), and the bias layer 6 formed of the same material as the alloy used for the antiferromagnetic layer 2 is disposed in a position farther from the substrate K than the antiferromagnetic layer 2.

Accordingly, by carrying out heat treatment on the first laminate a1 at the first heat treatment temperature (220 - 270°C) while applying the first magnetic field, an exchange anisotropic magnetic field is generated in the antiferromagnetic layer 2 and the magnetization direction of the pinned magnetic layer 3 is made stationary. Also, the exchange anisotropic magnetic field of the antiferromagnetic layer 2 exceeds 600 Oe (48000 A/m).

Then, by carrying out heat treatment on the second laminate a2 at the second heat treatment temperature (250 - 270°C) while applying the second magnetic field in a direction crossing the first magnetic field, the magnetization direction of the free magnetic layer 5 is uniformly arranged in the direction crossing the first magnetic field. Also, the exchange anisotropic magnetic field of the bias layer 6 exceeds 600 Oe (48000 A/m).

In the above process, by setting the second magnetic field to be smaller than the exchange anisotropic magnetic field of the antiferromagnetic layer 2 that has been generated by the preceding first heat treatment, the exchange anisotropic magnetic field of the antiferromagnetic layer 2 is not

deteriorated even with application of the second magnetic field to the antiferromagnetic layer 2. The magnetization direction of the pinned magnetic layer 3 can be thereby maintained stationary.

As a result, the magnetization direction of the pinned magnetic layer 3 and the magnetization direction of the free magnetic layer 5 can be held in crossing relation.

The first heat treatment temperature is preferably set to fall in the range of 220°C - 270°C. If the first heat treatment temperature is lower than 220°C, such an undesired result would occur that the exchange anisotropic magnetic field of the antiferromagnetic layer 2 is not higher than 200 (Oe), the magnetization of the pinned magnetic layer 3 cannot be increased up to a high level and the magnetization direction of the pinned magnetic layer 3 is changed to the same as that of the free magnetic layer 5 by the second heat treatment. On the other hand, if the first heat treatment temperature is higher than 270°C, such an undesired result would occur that the magnetoresistive effect is deteriorated due to, for example, thermal diffusion of atoms at the layer interfaces, especially, at the interface between the Cu layer of the non-magnetic electrically conductive layer 4 and the free magnetic layer 5 or the interface between the Cu layer and the pinned magnetic layer 3.

Further, the first heat treatment temperature is more preferably set to fall in the range of 230°C - 270°C because the



exchange anisotropic magnetic field of the antiferromagnetic layer 2 can reach over 400 Oe (32000 A/m) and the magnetization of the pinned magnetic layer 3 can be increased up to a high level.

The second heat treatment temperature is preferably set to fall in the range of 250°C - 270°C. If the second heat treatment temperature is lower than 250°C, such an undesired result would occur that the exchange anisotropic magnetic field of the bias layer 6 cannot be increased up over 400 Oe (32000 A/m) and a longitudinal magnetic field imparted to the free magnetic layer 5 cannot be increased up to a high level. On the other hand, if the second heat treatment temperature is higher than 270°C, such an undesired result would occur that the exchange anisotropic magnetic field of the bias layer 6 is no more increased and held almost constant, and the magnetoresistive effect is deteriorated due to, for example, thermal diffusion of atoms at the layer interfaces.

The first magnetic field is preferably set to be not lower than 10 Oe (800 A/m). If the first magnetic field is lower than about 10 Oe (800 A/m), such an undesired result would occur that the exchange anisotropic magnetic field of the antiferromagnetic layer 2 cannot be developed at a satisfactory level.

Further, the second magnetic field is set to be lower than the exchange-coupled magnetic field of the antiferromagnetic layer 2 that has been generated by the first heat treatment, and is preferably set to fall in the range of about 10 - 600 Oe (800

- 48000 A/m), more preferably set to about 200 Oe (1600 A/m). If the second magnetic field is smaller than 10 Oe (800 A/m), such an undesired result would occur that the exchange anisotropic magnetic field of the bias layer 6 cannot be developed at a satisfactory level. On the other hand, if the second magnetic field is higher than 600 Oe (4800 A/m), such an undesired result would occur that the exchange-coupled magnetic field of the antiferromagnetic layer 2 that has been generated by the first heat treatment may be deteriorated.

Relationships between a composition and an exchange anisotropic magnetic field of an antiferromagnetic layer, resulting when the heat treatment temperature is 245°C or 270°C, will now be described in detail with reference to Fig. 22.

Marks  $\Delta$  in Fig. 22 represent the relationship between a composition and an exchange anisotropic magnetic field of an antiferromagnetic layer in a top type single-spin-valve magnetoresistive sensor wherein the antiferromagnetic layer is disposed in a position farther from a substrate than a free magnetic layer (namely, the antiferromagnetic layer is disposed on a pinned magnetic layer). A curve indicated by marks  $\Delta$  corresponds to the case of carrying out heat treatment at 270°C.

Marks  $\bigcirc$  and marks  $\bullet$  in Fig. 22 each represent the relationships between a composition and an exchange anisotropic magnetic field of an antiferromagnetic layer in a bottom type single-spin-valve magnetoresistive sensor wherein the

antiferromagnetic layer is disposed between a substrate and a free magnetic layer (namely; the antiferromagnetic layer is disposed under a pinned magnetic layer). Curves indicated by marks  $\circ$  and  $\bullet$  correspond to the cases of carrying out heat treatment at 270°C and 245°C, respectively.

Concretely, in the top type single-spin-valve magnetoresistive sensor represented by marks  $\Delta$ , an underlying insulating layer 200 made of  $\text{Al}_2\text{O}_3$  (thickness 1000 Å), an underlying layer 210 made of Ta (thickness 50 Å), a two-layered free magnetic layer 5 comprising a NiFe alloy (thickness 70 Å) and a Co layer (thickness 10 Å), a non-magnetic electrically conductive layer 4 made of Cu (thickness 30 Å), a pinned magnetic layer 3 made of Co (thickness 25 Å), an antiferromagnetic layer 2 made of  $\text{Pt}_{\text{m}}\text{Mn}_{\text{t}}$  (thickness 300 Å), and a protective layer 220 made of Ta (thickness 50 Å) are successively formed on a Si substrate K in the order named, as shown in Fig. 24.

On the other hand, in the bottom type single-spin-valve magnetoresistive sensor represented by marks  $\circ$  and  $\bullet$ , an underlying insulating layer 200 made of  $\text{Al}_2\text{O}_3$  (thickness 1000 Å), an underlying layer 210 made of Ta (thickness 30 Å), an antiferromagnetic layer 2 made of  $\text{Pt}_{\text{m}}\text{Mn}_{100-\text{m}}$  (thickness 300 Å), a pinned magnetic layer 3 made of Co (thickness 25 Å), a non-magnetic electrically conductive layer 4 made of Cu (thickness 26 Å), a two-layered free magnetic layer 5 comprising a Co layer (thickness 10 Å) and a NiFe alloy (thickness 70 Å),

and a protective layer 220 made of Ta (thickness 50 Å) are successively formed on a Si substrate K in the order named, as shown in Fig. 23.

The method of manufacturing the spin-valve type magnetoresistive sensor 1 of this embodiment utilizes the properties of both the bottom type spin-valve magnetoresistive sensor and the top type spin-valve magnetoresistive sensor shown in Fig. 22.

More specifically, in the spin-valve type magnetoresistive sensor 1 of this embodiment constructed as a bottom type spin-valve magnetoresistive sensor, the composition range of an alloy used in the antiferromagnetic layer 2 is preferably set similarly to that in the antiferromagnetic layer of the bottom type spin-valve magnetoresistive sensor shown in Fig. 23, and the composition range of an alloy used in the bias layer 6 is preferably set similarly to that in the antiferromagnetic layer of the top type spin-valve magnetoresistive sensor shown in Fig. 24.

Also, as is apparent from Fig. 22, when the antiferromagnetic layer of the bottom type spin-valve magnetoresistive sensor, i.e., the antiferromagnetic layer 2 in this embodiment, is made of an alloy  $X_m\text{Mn}_{100-m}$  (where X is at least one or more elements selected from among Pt, Pd, Ir, Rh, Ru and Os), a composition ratio  $m$  preferably satisfies  $48 \text{ atom \%} \leq m \leq 60 \text{ atom \%}$ .

If  $m$  is less than 48 atom % or more than 60 atom %, such an undesired result would occur that crystal lattices of  $X_m\text{Mn}_{100-m}$  become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field (exchange anisotropic magnetic field), even with the second heat treatment carried out at the heat treatment temperature of 270°C.

A more preferable range of the composition ratio  $m$  is 48 atom %  $\leq m \leq 58$  atom %.

If  $m$  is less than 48 atom % or more than 58 atom %, such an undesired result would occur that crystal lattices of  $X_m\text{Mn}_{100-m}$  become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the first heat treatment carried out at the heat treatment temperature of 245°C.

A still more preferable range of the composition ratio  $m$  is 49.8 atom %  $\leq m \leq 58$  atom %. In this range, an exchange anisotropic magnetic field not lower than 400 Oe (32000 A/m) is obtained after the second heat treatment has been carried out at the heat treatment temperature of 270°C.

When the antiferromagnetic layer of the bottom type spin-valve magnetoresistive sensor, i.e., the antiferromagnetic layer 2 in this embodiment, is made of an alloy  $\text{Pt}_m\text{Mn}_{100-m-n}\text{D}_n$  (where D is at least one or more elements selected from among Pd, Ir,

Rh, Ru and Os), composition ratios  $m$ ,  $n$  preferably satisfy 48 atom %  $\leq m + n \leq 60$  atom % and 0.2 atom %  $\leq n \leq 40$  atom %.

If the sum of the composition ratios  $m + n$  is less than 48 atom % or more than 60 atom %, such an undesired result would occur that crystal lattices of  $\text{Pt}_m\text{Mn}_{100-m-n}\text{D}_n$  become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the second heat treatment carried out at the heat treatment temperature of 270°C.

Also, if the composition ratio  $n$  is less than 0.2 atom %, such an undesired result would occur that the effect of promoting regular array of crystal lattices of the antiferromagnetic layer 2, i.e., the effect of increasing the exchange anisotropic magnetic field, is suppressed. Conversely, if the composition ratio  $n$  is more than 40 atom %, such an undesired result would occur that the exchange anisotropic magnetic field is reduced.

A more preferable range of the sum of the composition ratios  $m + n$  is 48 atom %  $\leq m + n \leq 58$  atom %.

If the sum of the composition ratios  $m + n$  is less than 48 atom % or more than 58 atom %, such an undesired result would occur that crystal lattices of  $\text{Pt}_m\text{Mn}_{100-m-n}\text{D}_n$  become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the first heat treatment carried out at the heat treatment temperature of 245°C.

Still more preferably, the composition ratios  $m, n$  satisfy  $49.8 \text{ atom \%} \leq m + n \leq 58 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq n \leq 40 \text{ atom \%}$ . In these ranges, an exchange anisotropic magnetic field not lower than 400 Oe (32000 A/m) is obtained.

When the antiferromagnetic layer of the bottom type spin-valve magnetoresistive sensor, i.e., the antiferromagnetic layer 2 in this embodiment, is made of an alloy  $\text{Pt}_q\text{Mn}_{100-q-j}\text{L}_j$  (where L is at least one or more elements selected from among Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr), composition ratios  $q, j$  preferably satisfy  $48 \text{ atom \%} \leq q + j \leq 60 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq j \leq 10 \text{ atom \%}$ .

If the sum of the composition ratios  $q + j$  is less than 48 atom % or more than 60 atom %, such an undesired result would occur that crystal lattices of  $\text{Pt}_q\text{Mn}_{100-q-j}\text{L}_j$  become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the second heat treatment carried out at the heat treatment temperature of 270°C.

Also, if the composition ratio  $j$  is less than 0.2 atom %, such an undesired result would occur that the effect of improving the unidirectional exchange-coupled magnetic field with addition of the element L is not sufficiently developed. If  $j$  is more than 10 atom %, such an undesired result would occur that the unidirectional exchange-coupled magnetic field is reduced.

A more preferable range of the sum of the composition ratios

$q + j$  is 48 atom %  $\leq q + j \leq 58$  atom %.

If the sum of the composition ratios  $q + j$  is less than 48 atom % or more than 58 atom %, such an undesired result would occur that crystal lattices of  $\text{Pt}_q\text{Mn}_{100-q-j}\text{L}_j$  become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the first heat treatment carried out at the heat treatment temperature of 245°C.

Still more preferably, the composition ratios  $q, j$  satisfy  $49.8 \text{ atom \%} \leq q + j \leq 58 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq j \leq 10 \text{ atom \%}$ . In these ranges, an exchange anisotropic magnetic field not lower than 400 Oe (32000 A/m) is obtained.

Further, as is apparent from Fig. 22, when the antiferromagnetic layer of the top type spin-valve magnetoresistive sensor, i.e., the bias layer 6 in this embodiment, is made of an alloy  $\text{X}_m\text{Mn}_{100-m}$  (where X is at least one or more elements selected from among Pt, Pd, Ir, Rh, Ru and Os), a composition ratio  $m$  preferably satisfies  $52 \text{ atom \%} \leq m \leq 60 \text{ atom \%}$ .

If the composition ratio  $m$  is less than 52 atom % or more than 60 atom %, such an undesired result would occur that crystal lattices of  $\text{X}_m\text{Mn}_{100-m}$  become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the second heat treatment carried out



at the heat treatment temperature of 270°C.

A more preferable range of the composition ratio  $m$  is 52.8 atom %  $\leq m \leq 59.2$  atom %. In this range, an exchange anisotropic magnetic field, i.e., a bias magnetic field, not lower than 200 Oe (16000 A/m) is obtained.

When the antiferromagnetic layer of the top type spin-valve magnetoresistive sensor, i.e., the bias layer 6 in this embodiment, is made of an alloy  $\text{Pt}_m\text{Mn}_{100-m-n}\text{D}_n$  (where D is at least one or more elements selected from among Pd, Rh, Ru, Ir and Os), composition ratios  $m$ ,  $n$  preferably satisfy  $52 \text{ atom \%} \leq m + n \leq 60 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq n \leq 40 \text{ atom \%}$ .

If the sum of the composition ratios  $m + n$  is less than 52 atom % or more than 60 atom %, such an undesired result would occur that crystal lattices of  $\text{Pt}_m\text{Mn}_{100-m-n}\text{D}_n$  become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the second heat treatment carried out at the heat treatment temperature of 270°C.

Also, if the composition ratio  $n$  is less than 0.2 atom %, such an undesired result would occur that the effect of promoting regular array of crystal lattices of the antiferromagnetic layer, i.e., the effect of increasing the exchange anisotropic magnetic field, is suppressed. Conversely, if the composition ratio  $n$  is more than 40 atom %, such an undesired result would occur that the exchange anisotropic magnetic field is reduced.

More preferably, the composition ratios  $m$ ,  $n$  satisfy 52.8 atom %  $\leq m + n \leq 59.2$  atom % and 0.2 atom %  $\leq n \leq 40$  atom %. In these ranges, an exchange anisotropic magnetic field not lower than 200 Oe (16000 A/m) is obtained.

When the antiferromagnetic layer of the top type spin-valve magnetoresistive sensor, i.e., the bias layer 6 in this embodiment, is made of an alloy  $\text{Pt}_q\text{Mn}_{100-q-j}\text{L}_j$  (where L is at least one or more elements selected from among Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr), composition ratios  $q$ ,  $j$  preferably satisfy 52 atom %  $\leq q + j \leq 60$  atom % and 0.2 atom %  $\leq j \leq 10$  atom %.

If the sum of the composition ratios  $q + j$  is less than 52 atom % or more than 60 atom %, such an undesired result would occur that crystal lattices of  $\text{Pt}_q\text{Mn}_{100-q-j}\text{L}_j$  become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the second heat treatment carried out at the heat treatment temperature of 270°C.

Also, if the composition ratio  $j$  is less than 0.2 atom %, such an undesired result would occur that the effect of improving the unidirectional exchange-coupled magnetic field with addition of the element L is not sufficiently developed. If  $j$  is more than 10 atom %, such an undesired result would occur that the unidirectional exchange-coupled magnetic field is reduced.

More preferably, the composition ratios  $q$ ,  $j$  satisfy 52.8 atom %  $\leq q + j \leq 59.2$  atom % and 0.2 atom %  $\leq j \leq 10$  atom %. In

these ranges, an exchange anisotropic magnetic field not lower than 200 Oe (32000 A/m) is obtained.

Moreover, as is apparent from Fig. 22, when the antiferromagnetic layer of the bottom type spin-valve magnetoresistive sensor, i.e., the antiferromagnetic layer 2 in this embodiment, and the antiferromagnetic layer of the top type spin-valve magnetoresistive sensor, i.e., the bias layer 6 in this embodiment, are each made of an alloy  $X_m\text{Mn}_{100-m}$  (where X is at least one or more elements selected from among Pt, Pd, Ir, Rh, Ru and Os), a composition ratio  $m$  preferably satisfies  $52 \text{ atom \%} \leq m \leq 58 \text{ atom \%}$  for each of the antiferromagnetic layer 2 and the bias layer 6.

If the composition ratio  $m$  is less than 52 atom %, such an undesired result would occur that crystal lattices of  $X_m\text{Mn}_{100-m}$  making up the bias layer 6 become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the second heat treatment carried out at the heat treatment temperature of 270°C.

If the composition ratio  $m$  is more than 58 atom %, such an undesired result would occur that crystal lattices of  $X_m\text{Mn}_{100-m}$  making up the antiferromagnetic layer 2 become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the first heat

treatment carried out at the heat treatment temperature of 245°C. In other words, when subjected to the second heat treatment at the heat treatment temperature of 270°C, the pinned magnetic layer 3 would be magnetized in the same magnetization direction as the bias layer 6, or the magnetization direction of the pinned magnetic layer 3 would not cross the magnetization direction of the bias layer 6 in orthogonal relation, whereby symmetry of a reproduced output waveform is lost.

When the antiferromagnetic layer 2 and the bias layer 6 are each made of an alloy  $X_m\text{Mn}_{100-m}$ , the composition ratio  $m$  more preferably satisfies  $52 \text{ atom } \% \leq m \leq 56.3 \text{ atom } \%$  for each of the antiferromagnetic layer 2 and the bias layer 6.

If the composition ratio  $m$  is less than 52 atom %, such an undesired result would occur that crystal lattices of  $X_m\text{Mn}_{100-m}$  making up the bias layer 6 become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the second heat treatment carried out at the heat treatment temperature of 270°C.

If the composition ratio  $m$  is more than 56.3 atom %, such an undesired result would occur that the exchange anisotropic magnetic field generated by the bias layer 6 is greater than the exchange anisotropic magnetic field generated by the antiferromagnetic layer 2, and an external magnetic field greater than the exchange anisotropic magnetic field generated

by the antiferromagnetic layer 2 is applied to the bias layer 6 during the second heat treatment carried out at the heat treatment temperature of 270°C. In other words, when subjected to the second heat treatment at the heat treatment temperature of 270°C, the magnetization direction of the pinned magnetic layer 3 would be changed to the same as that of the bias layer 6, or it would be difficult to uniformly arrange the magnetization direction of the pinned magnetic layer 3 in orthogonal relation to the magnetization direction of the free magnetic layer 5 with the second heat treatment.

By setting the composition ratio  $m$  to satisfy 52 atom %  $\leq m \leq 56.3$  atom % for each of the antiferromagnetic layer 2 and the bias layer 6, therefore, an exchange anisotropic magnetic field is generated in the antiferromagnetic layer 2 by the first heat treatment, and the exchange anisotropic magnetic field of the antiferromagnetic layer 2 is greater than the exchange anisotropic magnetic field of the bias layer 6 generated after the second heat treatment. Accordingly, such a desired result is obtained that the magnetization direction of the pinned magnetic layer 3 remains not changed and held stationary, whereas the magnetization direction of the free magnetic layer 5 is allowed to smoothly change, when a signal magnetic field is applied from the magnetic recording medium.

When the antiferromagnetic layer 2 and the bias layer 6 are each made of an alloy  $\text{Pt}_m\text{Mn}_{100-m-n}\text{D}_n$  (where D is at least one

or more elements selected from among Pd, Ir, Rh, Ru and Os), composition ratios  $m$ ,  $n$  preferably satisfy  $52 \text{ atom \%} \leq m + n \leq 58 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq n \leq 40 \text{ atom \%}$ .

If the sum of the composition ratios  $m + n$  is less than 52 atom %, such an undesired result would occur that crystal lattices of  $\text{Pt}_m\text{Mn}_{100-m-n}\text{D}_n$  making up the bias layer 6 become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the second heat treatment carried out at the heat treatment temperature of 270°C.

If  $m + n$  is more than 58 atom %, such an undesired result would occur that crystal lattices of  $\text{Pt}_m\text{Mn}_{100-m-n}\text{D}_n$  making up the antiferromagnetic layer 2 become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the first heat treatment carried out at the heat treatment temperature of 245°C. In other words, when subjected to the second heat treatment at the heat treatment temperature of 270°C, the pinned magnetic layer 3 would be magnetized in the same magnetization direction as the bias layer 6, or the magnetization direction of the pinned magnetic layer 3 would not cross the magnetization direction of the bias layer 6 in orthogonal relation, whereby symmetry of a reproduced output waveform is lost.

Also, if the composition ratio  $n$  is less than 0.2 atom %,

such an undesired result would occur that the effect of improving the unidirectional exchange-coupled magnetic field with addition of the element D is not sufficiently developed. If  $n$  is more than 40 atom %, such an undesired result would occur that the unidirectional exchange-coupled magnetic field is reduced.

When the antiferromagnetic layer 2 and the bias layer 6 are each made of an alloy  $\text{Pt}_m\text{Mn}_{100-m-n}\text{D}_n$ , the composition ratios  $m$ ,  $n$  more preferably satisfy  $52 \text{ atom \%} \leq m + n \leq 56.3 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq n \leq 40 \text{ atom \%}$ .

If the sum of the composition ratios  $m + n$  is less than 52 atom %, such an undesired result would occur that crystal lattices of  $\text{Pt}_m\text{Mn}_{100-m-n}\text{D}_n$  making up the bias layer 6 become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the second heat treatment carried out at the heat treatment temperature of 270°C.

If the composition ratio  $m + n$  is more than 56.3 atom %, such an undesired result would occur that the exchange anisotropic magnetic field generated by the bias layer 6 is greater than the exchange anisotropic magnetic field generated by the antiferromagnetic layer 2, and an external magnetic field greater than the exchange anisotropic magnetic field generated by the antiferromagnetic layer 2 is applied to the bias layer 6 during the second heat treatment carried out at the heat treatment temperature of 270°C. In other words, when subjected

to the second heat treatment at the heat treatment temperature of 270°C, the magnetization direction of the pinned magnetic layer 3 would be changed to the same as that of the bias layer 6, or it would be difficult to uniformly arrange the magnetization direction of the pinned magnetic layer 3 in orthogonal relation to the magnetization direction of the free magnetic layer 5 with the second heat treatment.

Also, if the composition ratio  $n$  is less than 0.2 atom %, such an undesired result would occur that the effect of improving the unidirectional exchange-coupled magnetic field with addition of the element D is not sufficiently developed. If  $n$  is more than 40 atom %, such an undesired result would occur that the unidirectional exchange-coupled magnetic field is reduced.

By setting the composition ratios  $m + n$  to satisfy 52 atom %  $\leq m + n \leq 56.3$  atom % and  $0.2$  atom %  $\leq n \leq 40$  atom % for each of the antiferromagnetic layer 2 and the bias layer 6, therefore, an exchange anisotropic magnetic field is generated in the antiferromagnetic layer 2 by the first heat treatment, and the exchange anisotropic magnetic field of the antiferromagnetic layer 2 is greater than the exchange anisotropic magnetic field of the bias layer 6 generated after the second heat treatment. Accordingly, such a desired result is obtained that the magnetization direction of the pinned magnetic layer 3 remains not changed and held stationary, whereas the magnetization direction of the free magnetic layer 5 is allowed to smoothly



change, when a signal magnetic field is applied from the magnetic recording medium.

When the antiferromagnetic layer 2 and the bias layer 6 are each made of an alloy  $\text{Pt}_q\text{Mn}_{100-q-j}\text{L}_j$  (where L is at least one or more elements selected from among Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr), composition ratios  $q, j$  preferably satisfy  $52 \text{ atom } \% \leq q + j \leq 58 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq j \leq 10 \text{ atom } \%$ .

If the sum of the composition ratios  $q + j$  is less than 52 atom %, such an undesired result would occur that crystal lattices of  $\text{Pt}_q\text{Mn}_{100-q-j}\text{L}_j$  making up the bias layer 6 become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the second heat treatment carried out at the heat treatment temperature of 270°C.

If  $q + j$  is more than 58 atom %, such an undesired result would occur that crystal lattices of  $\text{Pt}_q\text{Mn}_{100-q-j}\text{L}_j$  making up the antiferromagnetic layer 2 become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the first heat treatment carried out at the heat treatment temperature of 245°C. In other words, when subjected to the second heat treatment at the heat treatment temperature of 270°C, the pinned magnetic layer 3 would be magnetized in the same magnetization direction as the bias layer 6, or the magnetization direction of the pinned magnetic layer

3 would not cross the magnetization direction of the bias layer 6 in orthogonal relation, whereby symmetry of a reproduced output waveform is lost.

Also, if the composition ratio  $j$  is less than 0.2 atom %, such an undesired result would occur that the effect of improving the unidirectional exchange-coupled magnetic field with addition of the element L is not sufficiently developed. If  $j$  is more than 10 atom %, such an undesired result would occur that the unidirectional exchange-coupled magnetic field is reduced.

When the antiferromagnetic layer 2 and the bias layer 6 are each made of an alloy  $Pt_qMn_{100-q-j}L_j$ , the composition ratios  $q, j$  more preferably satisfy  $52 \text{ atom \%} \leq q + j \leq 56.3 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq j \leq 10 \text{ atom \%}$ .

If the sum of the composition ratios  $q + j$  is less than 52 atom %, such an undesired result would occur that crystal lattices of  $Pt_qMn_{100-q-j}L_j$  making up the bias layer 6 become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the second heat treatment carried out at the heat treatment temperature of 270°C.

If the composition ratio  $q + j$  is more than 56.3 atom %, such an undesired result would occur that the exchange anisotropic magnetic field generated by the bias layer 6 is greater than the exchange anisotropic magnetic field generated by the antiferromagnetic layer 2, and an external magnetic field

greater than the exchange anisotropic magnetic field generated by the antiferromagnetic layer 2 is applied to the bias layer 6 during the second heat treatment carried out at the heat treatment temperature of 270°C. In other words, when subjected to the second heat treatment at the heat treatment temperature of 270°C, the magnetization direction of the pinned magnetic layer 3 would be changed to the same as that of the free magnetic layer 5, or it would be difficult to uniformly arrange the magnetization direction of the pinned magnetic layer 3 in orthogonal relation to the magnetization direction of the free magnetic layer 5 with the second heat treatment.

Also, if the composition ratio  $j$  is less than 0.2 atom %, such an undesired result would occur that the effect of improving the unidirectional exchange-coupled magnetic field with addition of the element L is not sufficiently developed. If  $j$  is more than 10 atom %, such an undesired result would occur that the unidirectional exchange-coupled magnetic field is reduced.

By setting the composition ratios  $q + j$  to satisfy 52 atom %  $\leq q + j \leq 56.3$  atom % and  $0.2$  atom %  $\leq j \leq 10$  atom % for each of the antiferromagnetic layer 2 and the bias layer 6, therefore, an exchange anisotropic magnetic field is generated in the antiferromagnetic layer 2 by the first heat treatment, and the exchange anisotropic magnetic field of the antiferromagnetic layer 2 is greater than the exchange anisotropic magnetic field of the bias layer 6 generated after the second heat treatment.

Accordingly, such a desired result is obtained that the magnetization direction of the pinned magnetic layer 3 remains not changed and held stationary, whereas the magnetization direction of the free magnetic layer 5 is allowed to smoothly change, when a signal magnetic field is applied from the magnetic recording medium.

As an alternative, the antiferromagnetic layer of the bottom type spin-valve magnetoresistive sensor, i.e., the antiferromagnetic layer 2 in this embodiment, may have a composition different from that of the antiferromagnetic layer of the top type spin-valve magnetoresistive sensor, i.e., the bias layer 6 in this embodiment, so that the antiferromagnetic layer 2 has a higher Mn concentration, for example, than that of the bias layer 6. This makes it possible to provide a more significant difference between the exchange anisotropic magnetic fields of the antiferromagnetic layer 2 and the bias layer 6 after the second heat treatment, and to more surely make the magnetization direction of the free magnetic layer 5 cross the magnetization direction of the pinned magnetic layer 3 in orthogonal relation after the second heat treatment.

Also, by providing a more significant difference between the exchange anisotropic magnetic fields of the antiferromagnetic layer 2 and the bias layer 6, which are made different in Mn concentration from each other, after the second heat treatment, the magnetization direction of the pinned

magnetic layer 3 remains not changed and held stationary with higher certainty, whereas the magnetization direction of the free magnetic layer 5 is allowed to more smoothly change, when a signal magnetic field is applied from the magnetic recording medium.

More specifically, it is more preferable that the bias layer 62 be made of an alloy  $X_mMn_{100-m}$  (where X is at least one or more elements selected from among Pt, Pd, Ir, Rh, Ru and Os and a composition ratio  $m$  satisfies  $52 \text{ atom } \% \leq m \leq 60 \text{ atom } \%$ ), and the antiferromagnetic layer 2 be made of an alloy  $X_mMn_{100-m}$  (where X is at least one or more elements selected from among Pt, Pd, Ir, Rh, Ru and Os and a composition ratio  $m$  preferably satisfies  $48 \text{ atom } \% \leq m \leq 58 \text{ atom } \%$ ).

As shown in Fig. 22, if the composition ratio  $m$  of the bias layer 6 is less than 53 atom % or more than 60 atom %, such an undesired result would occur that crystal lattices of  $X_mMn_{100-m}$  making up the bias layer 6 become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the second heat treatment carried out at the heat treatment temperature of 270°C.

If the composition ratio  $m$  of the antiferromagnetic layer 2 is less than 48 atom % or more than 58 atom %, such an undesired result would occur that crystal lattices of  $X_mMn_{100-m}$  making up the antiferromagnetic layer 2 become hard to regularly align into

L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the first heat treatment carried out at the heat treatment temperature of 245°C.

Thus, the composition ratio ( $48 \text{ atom } \% \leq m \leq 58 \text{ atom } \%$ ) of the antiferromagnetic layer 2 and the composition ratio ( $52 \text{ atom } \% \leq m \leq 60 \text{ atom } \%$ ) of the bias layer 6 are selected to have different ratios within the respective ranges so that the exchange anisotropic magnetic field of the antiferromagnetic layer 2 is generated with the first heat treatment carried out at the first heat treatment temperature of 245°C, and the exchange anisotropic magnetic field of the antiferromagnetic layer 2 is greater than the exchange anisotropic magnetic field of the bias layer 6 after carrying out the second heat treatment at the second heat treatment temperature of 270°C while applying an external magnetic field smaller than the exchange anisotropic magnetic field of the antiferromagnetic layer 2 during the second heat treatment.

By selecting different composition ratios within the respective ranges so as to satisfy the above condition, a difference between the exchange anisotropic magnetic field of the antiferromagnetic layer 2 and the exchange anisotropic magnetic field of the bias layer 6 after the second heat treatment can be made more significant and hence the degree of freedom in design can be made greater with the selected combination of

different compositions than the case of forming the antiferromagnetic layer 2 and the bias layer 6 of the same composition.

Also, by generating the exchange anisotropic magnetic field of the antiferromagnetic layer 2 with the first heat treatment and applying an external magnetic field smaller than the exchange anisotropic magnetic field of the antiferromagnetic layer 2 during the second heat treatment, the magnetization direction of the free magnetic layer 5 and the magnetization direction of the pinned magnetic layer 3 can be set in cross relation, while the magnetization direction of the pinned magnetic layer 3 is positively held stationary without deteriorating the exchange anisotropic magnetic field of the antiferromagnetic layer 2 or changing the magnetization direction thereof.

Further, since the exchange anisotropic magnetic field of the antiferromagnetic layer 2 can be made still greater than the exchange anisotropic magnetic field of the bias layer 6 after the second heat treatment, the magnetization direction of the pinned magnetic layer 3 remains not changed and held stationary with higher certainty, whereas the magnetization direction of the free magnetic layer 5 is allowed to more smoothly change, when a signal magnetic field is applied from the magnetic recording medium.

As another preferable combination of the antiferromagnetic

layer 2 and the bias layer 6, the bias layer 6 is made of an alloy  $\text{Pt}_m\text{Mn}_{100-m-n}\text{D}_n$  (where D is at least one or more elements selected from among Pd, Ir, Rh, Ru and Os, and composition ratios  $m, n$  satisfy  $52 \text{ atom } \% \leq m + n \leq 60 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq n \leq 40 \text{ atom } \%$ ), and the antiferromagnetic layer 2 is made of an alloy  $\text{Pt}_m\text{Mn}_{100-m-n}\text{D}_n$  (where D is at least one or more elements selected from among Pd, Ir, Rh, Ru and Os, and composition ratios  $m, n$  satisfy  $48 \text{ atom } \% \leq m + n \leq 58 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq n \leq 40 \text{ atom } \%$ ).

If the sum of the composition ratios  $m + n$  of the bias layer 6 is less than 52 atom % or more than 60 atom %, such an undesired result would occur that crystal lattices of  $\text{Pt}_m\text{Mn}_{100-m-n}\text{D}_n$  making up the bias layer 6 become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the second heat treatment carried out at the heat treatment temperature of 270°C.

If the composition ratio  $n$  of the bias layer 6 is less than 0.2 atom %, such an undesired result would occur that the effect of improving the unidirectional exchange-coupled magnetic field with addition of the element D is not sufficiently developed. If  $n$  is more than 40 atom %, such an undesired result would occur that the unidirectional exchange-coupled magnetic field is reduced.

Also, if the sum of the composition ratios  $m + n$  of the



antiferromagnetic layer 2 is less than 48 atom % or more than 58 atom %, such an undesired result would occur that crystal lattices of  $\text{Pt}_m\text{Mn}_{100-m-n}\text{D}_n$  making up the antiferromagnetic layer 2 become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the first heat treatment carried out at the heat treatment temperature of 245°C.

If the composition ratio  $n$  of the antiferromagnetic layer 2 is less than 0.2 atom %, such an undesired result would occur that the effect of improving the unidirectional exchange-coupled magnetic field with addition of the element D is not sufficiently developed. If  $n$  is more than 40 atom %, such an undesired result would occur that the unidirectional exchange-coupled magnetic field is reduced.

Thus, the composition ratio ( $48 \text{ atom \%} \leq m + n \leq 58 \text{ atom \%}$ ) of the antiferromagnetic layer 2 and the composition ratio ( $52 \text{ atom \%} \leq m + n \leq 60 \text{ atom \%}$ ) of the bias layer 6 are selected to have different ratios within the respective ranges so that the exchange anisotropic magnetic field of the antiferromagnetic layer 2 is generated with the first heat treatment carried out at the first heat treatment temperature of 245°C, and the exchange anisotropic magnetic field of the antiferromagnetic layer 2 is greater than the exchange anisotropic magnetic field of the bias layer 6 after carrying out the second heat treatment at the second

heat treatment temperature of 270°C while applying an external magnetic field smaller than the exchange anisotropic magnetic field of the antiferromagnetic layer 2 during the second heat treatment.

By selecting different composition ratios within the respective ranges so as to satisfy the above condition, a difference between the exchange anisotropic magnetic field of the antiferromagnetic layer 2 and the exchange anisotropic magnetic field of the bias layer 6 after the second heat treatment can be made more significant and hence the degree of freedom in design can be made greater with the selected combination of different compositions than the case of forming the antiferromagnetic layer 2 and the bias layer 6 of the same composition.

Also, by generating the exchange anisotropic magnetic field of the antiferromagnetic layer 2 with the first heat treatment and applying an external magnetic field smaller than the exchange anisotropic magnetic field of the antiferromagnetic layer 2 during the second heat treatment, the magnetization directions of the free magnetic layer 5 and the pinned magnetic layer 3 can be set in cross relation to each other, while the magnetization direction of the pinned magnetic layer 3 is positively held stationary without deteriorating the exchange anisotropic magnetic field of the antiferromagnetic layer 2 or changing the magnetization direction thereof.

Further, since the exchange anisotropic magnetic field of the antiferromagnetic layer 2 can be made still greater than the exchange anisotropic magnetic field of the bias layer 6 after the second heat treatment, the magnetization direction of the pinned magnetic layer 3 remains not changed and held stationary with higher certainty, whereas the magnetization direction of the free magnetic layer 5 is allowed to more smoothly change, when a signal magnetic field is applied from the magnetic recording medium.

As still another preferable combination of the antiferromagnetic layer 2 and the bias layer 6, the bias layer 6 is made of an alloy  $\text{Pt}_q\text{Mn}_{100-q-j}\text{L}_j$  (where L is at least one or more elements selected from among Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, and composition ratios  $q, j$  satisfy  $52 \text{ atom } \% \leq q + j \leq 60 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq j \leq 10 \text{ atom } \%$ , and the antiferromagnetic layer 2 is made of an alloy  $\text{Pt}_q\text{Mn}_{100-q-j}\text{L}_j$  (where L is at least one or more elements selected from among Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, and composition ratios  $q, j$  satisfy  $48 \text{ atom } \% \leq q + j \leq 58 \text{ atom } \%$  and  $0.2 \text{ atom } \% \leq j \leq 10 \text{ atom } \%$ ).

If the sum of the composition ratios  $q + j$  of the bias layer 6 is less than 52 atom % or more than 60 atom %, such an undesired result would occur that crystal lattices of  $\text{Pt}_q\text{Mn}_{100-q-j}\text{L}_j$  making up the bias layer 6 become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled

magnetic field, even with the second heat treatment carried out at the heat treatment temperature of 270°C.

If the composition ratio  $j$  of the bias layer 6 is less than 0.2 atom %, such an undesired result would occur that the effect of improving the unidirectional exchange-coupled magnetic field with addition of the element L is not sufficiently developed. If  $j$  is more than 10 atom %, such an undesired result would occur that the unidirectional exchange-coupled magnetic field is reduced.

Also, if the sum of the composition ratios  $q + j$  of the antiferromagnetic layer 2 is less than 48 atom % or more than 58 atom %, such an undesired result would occur that crystal lattices of  $\text{Pt}_q\text{Mn}_{100-q-j}\text{L}_j$  making up the antiferromagnetic layer 2 become hard to regularly align into L10 type superlattices and do not exhibit antiferromagnetic characteristics, i.e., a unidirectional exchange-coupled magnetic field, even with the first heat treatment carried out at the heat treatment temperature of 245°C.

If the composition ratio  $j$  of the antiferromagnetic layer 2 is less than 0.2 atom %, such an undesired result would occur that the effect of improving the unidirectional exchange-coupled magnetic field with addition of the element L is not sufficiently developed. If  $j$  is more than 10 atom %, such an undesired result would occur that the unidirectional exchange-coupled magnetic field is reduced.

Thus, the composition ratio ( $48 \text{ atom } \% \leq q + j \leq 58 \text{ atom } \%$ ) of the antiferromagnetic layer 2 and the composition ratio ( $52 \text{ atom } \% \leq q + j \leq 60 \text{ atom } \%$ ) of the bias layer 6 are selected to have different ratios within the respective ranges so that the exchange anisotropic magnetic field of the antiferromagnetic layer 2 is generated with the first heat treatment carried out at the first heat treatment temperature of  $245^{\circ}\text{C}$ , and the exchange anisotropic magnetic field of the antiferromagnetic layer 2 is greater than the exchange anisotropic magnetic field of the bias layer 6 after carrying out the second heat treatment at the second heat treatment temperature of  $270^{\circ}\text{C}$  while applying an external magnetic field smaller than the exchange anisotropic magnetic field of the antiferromagnetic layer 2 during the second heat treatment.

By selecting different composition ratios within the respective ranges so as to satisfy the above condition, a difference between the exchange anisotropic magnetic field of the antiferromagnetic layer 2 generated by the first heat treatment and the exchange anisotropic magnetic field of the bias layer 6 generated by the second heat treatment can be made more significant and hence the degree of freedom in design can be made greater with the selected combination of different compositions than the case of forming the antiferromagnetic layer 2 and the bias layer 6 of the same composition.

Also, by generating the exchange anisotropic magnetic

field of the antiferromagnetic layer 2 with the first heat treatment and applying an external magnetic field smaller than the exchange anisotropic magnetic field of the antiferromagnetic layer 2 during the second heat treatment, the magnetization directions of the free magnetic layer 5 and the pinned magnetic layer 3 can be set in cross relation to each other, while the magnetization direction of the pinned magnetic layer 3 is positively held stationary without deteriorating the exchange anisotropic magnetic field of the antiferromagnetic layer 2 or changing the magnetization direction thereof.

Further, since the exchange anisotropic magnetic field of the antiferromagnetic layer 2 can be made still greater than the exchange anisotropic magnetic field of the bias layer 6 after the second heat treatment, the magnetization direction of the pinned magnetic layer 3 remains not changed and held stationary with higher certainty, whereas the magnetization direction of the free magnetic layer 5 is allowed to more smoothly change, when a signal magnetic field is applied from the magnetic recording medium.

In the spin-valve type magnetoresistive sensor 1 thus constructed, the antiferromagnetic layer 2 and the bias layer 6 are each made of an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn. Therefore, the exchange anisotropic magnetic field has a good temperature characteristic,

and the spin-valve type magnetoresistive sensor 1 has superior heat resistance.

The blocking temperature of a PtMn alloy, for example, is about 380°C higher than that of a FeMn alloy, i.e., 150°C, which has been used for a bias layer of a conventional spin-valve type magnetoresistive sensor.

Accordingly, the spin-valve type magnetoresistive sensor 1 has good durability even when it is provided in a device such as a magnetoresistive head where the inside temperature reaches a high level, and exhibits a less variation in the exchange anisotropic magnetic field (exchange-coupled magnetic field) with a temperature change.

Further, by forming the antiferromagnetic layer 2 of the above-mentioned material, the blocking temperature can be raised and a greater exchange anisotropic magnetic field can be generated in the antiferromagnetic layer 2. As a result, the magnetization direction of the pinned magnetic layer 3 can be firmly held stationary.

Of the various materials for the bias layer 6 and the antiferromagnetic layer 2 in the present invention, a more preferable material is a PtMn alloy that has a higher blocking temperature, i.e., 380°C, than that of a IrMn alloy, i.e., 230°C.

In the method of manufacturing the spin-valve type magnetoresistive sensor 1, an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au,

Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn is used for the antiferromagnetic layer 2 and the bias layer 6. By utilizing properties of such an alloy, the magnetization direction of the pinned magnetic layer 3 is made stationary by the first heat treatment, and the magnetization direction of the free magnetic layer 5 is uniformly arranged in a direction crossing the magnetization direction of the pinned magnetic layer 3 by the second heat treatment. It is therefore possible to uniformly arrange the magnetization direction of the free magnetic layer 5 in a direction crossing the magnetization direction of the pinned magnetic layer 3 without adversely affecting the magnetization direction of the pinned magnetic layer 3, and to provide the spin-valve type magnetoresistive sensor 1 having superior heat resistance.

Also, in the method of manufacturing the spin-valve type magnetoresistive sensor 1, the soft magnetic layers 7, 7 are formed on the first laminate 1a, and the bias layers 6, 6 are formed respectively on the soft magnetic layers 7, 7. After forming the soft magnetic layers 7, 7, therefore, the bias layers 6, 6 can be formed without breaking a vacuum. This means no necessity of cleaning a surface, on which the bias layers 6, 6 are to be formed, by ion milling or reverse sputtering. As a result, the manufacturing method is superior in being free from a drawback attributable to the cleaning, such as an adverse effect upon generation of the exchange anisotropic magnetic



field caused by contamination with foreign matters deposited again on the surface or disorder of the crystal state at the surface.

Moreover, the manufacturing process is facilitated because of no necessity of cleaning the surface, on which the bias layers 6, 6 are to be formed, before forming the bias layers 6, 6.

On the other hand, the ferromagnetic coupling at the interface between the free magnetic layer 5 and the soft magnetic layer 7 is not so sensitive to contamination etc. as the exchange coupling at the interface between the free magnetic layer 5 and an antiferromagnetic layer. Therefore, a longitudinal magnetic field imparted to the free magnetic layer 5 can be surely generated at a sufficient level even if the soft magnetic layer 7 is formed after breaking a vacuum and exposing the laminate 1a to the atmosphere. Alternatively, prior to forming the soft magnetic layer 7, the surface of the laminate 1a may be cleaned by ion milling or reverse sputtering, for example, without breaking a vacuum.

By providing the above-described spin-valve type magnetoresistive sensor 1 on the slider 151, a highly reliable magnetoresistive head can be obtained which is superior in durability and heat resistance, and which can generate an exchange anisotropic magnetic field at a sufficient level.

In the spin-valve type magnetoresistive sensor 1 according to the first embodiment of the present invention, as described

above, the pinned magnetic layer 3 and the free magnetic layer 5 are each formed in a single-layer structure respectively under and on the non-magnetic electrically conductive layer 4 in the direction of thickness thereof. However, the pinned magnetic layer 3 and the free magnetic layer 5 may be each formed in a multilayer structure.

The mechanism developing a giant magnetoresistive change is attributable to spin-dependent scattering of conduction electrons caused at the interface between the non-magnetic electrically conductive layer 4 and the pinned magnetic layer 3 and at the interface between the non-magnetic electrically conductive layer 4 and the free magnetic layer 5. A preferable combination with the non-magnetic electrically conductive layer 4 made of Cu, for example, for causing spin-dependent scattering more remarkably is given by a Co layer. For this reason, when the pinned magnetic layer 3 is made of a material other than Co, a portion of the pinned magnetic layer 3 in contact with the non-magnetic electrically conductive layer 4 is preferably formed of a thin Co layer 3a as indicated by a two-dot-chain line in Fig. 1. Also, when the free magnetic layer 5 is made of a material other than Co, a portion of the free magnetic layer 5 in contact with the non-magnetic electrically conductive layer 4 is preferably formed, as with the pinned magnetic layer 3, of a thin Co layer 5a as indicated by a two-dot-chain line in Fig. 1.

[Second Embodiment]

Fig. 7 is a cross-sectional view schematically showing a spin-valve type magnetoresistive sensor according to a second embodiment of the present invention, and Fig. 8 is a sectional view showing the structure of the spin-valve type magnetoresistive sensor shown in Fig. 7, as viewed from the side facing a recording medium.

Similarly to the spin-valve type magnetoresistive sensor shown in Fig. 1, the spin-valve type magnetoresistive sensor of this embodiment is also provided, for example, on a trailing end face of a floating slider mounted in a hard disk device, and is used to detect a magnetic field recorded on a hard disk or the like.

In Figs. 7 and 8, a Z-direction represents the moving direction of a magnetic recording medium such as a hard disk, and a Y-direction represents the direction of a leakage magnetic field from the magnetic recording medium.

The spin-valve type magnetoresistive sensor shown in Figs. 7 and 8 is one of the so-called bottom type single-spin-valve magnetoresistive sensors wherein an antiferromagnetic layer, a pinned magnetic layer, a non-magnetic electrically conductive layer, and a free magnetic layer are formed on a substrate one by one in this order.

In the spin-valve type magnetoresistive sensor of this embodiment, as with the spin-valve type magnetoresistive sensor

shown in Fig. 1, a magnetization direction of the free magnetic layer is uniformly arranged so as to cross a magnetization direction of the pinned magnetic layer based on exchange biasing by using a bias layer made of an antiferromagnetic material.

In Figs. 7 and 8, character K denotes a substrate. On the substrate K, an insulating underlying layer 200 made of  $Al_2O_3$ , for example, a lower shielding layer 163, a lower gap layer 164, and an antiferromagnetic layer 11 are formed in succession. Further, a first pinned magnetic layer 12 is formed on the antiferromagnetic layer 11. Then, a non-magnetic intermediate layer 13 is formed on the first pinned magnetic layer 12, and a second pinned magnetic layer 14 is formed on the non-magnetic intermediate layer 13. Moreover, a non-magnetic electrically conductive layer 15 is formed on the second pinned magnetic layer 14, and a free magnetic layer 16 is formed on the non-magnetic electrically conductive layer 15.

On the free magnetic layer 16, a pair of soft magnetic layers 19, 19 are formed while a spacing corresponding to a track width Tw is left between the soft magnetic layers 19, 19. A pair of bias layers 130, 130 are formed respectively on the soft magnetic layers 19, 19, and a pair of electrically conductive layers 131, 131 are formed respectively on the bias layers 130, 130.

In the spin-valve type magnetoresistive sensor of this second embodiment, as with the above spin-valve type magnetoresistive sensor of the first embodiment, the

antiferromagnetic layer 11 is made of an alloy containing at least one or more elements selected from among Pt, Pd, Ir, Rh, Ru, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn. The antiferromagnetic layer 11 acts to magnetize the first pinned magnetic layer 12 and the second pinned magnetic layer 14 in respective certain directions when subjected to heat treatment under a magnetic field.

The first pinned magnetic layer 12 and the second pinned magnetic layer 14 are each formed of, for example, a Co film, a NiFe alloy, a CoNiFe alloy, a CoNi alloy or a CoFe alloy.

The non-magnetic intermediate layer 13 interposed between the first pinned magnetic layer 12 and the second pinned magnetic layer 14 is preferably made of one selected from among Ru, Rh, Ir, Cr, Re and Cu, or an alloy of two or more selected from among them.

Additionally, arrows depicted in the first pinned magnetic layer 12 and the second pinned magnetic layer 14, shown in Fig. 7, indicate the magnitudes and directions of respective magnetic moments. The magnitude of each magnetic moment is defined as a value resulted from multiplying a saturation magnetization ( $M_s$ ) and a film thickness ( $t$ ).

The first pinned magnetic layer 12 and the second pinned magnetic layer 14 shown in Figs. 7 and 8 are formed of the same material such that a film thickness  $t_{P_2}$  of the second pinned magnetic layer 14 is greater than a film thickness  $t_{P_1}$  of the

first pinned magnetic layer 12. Therefore, the second pinned magnetic layer 14 has a greater magnetic moment than the first pinned magnetic layer 12.

Thus, it is desired that the first pinned magnetic layer 12 and the second pinned magnetic layer 14 have different magnetic moments from each other. To this end, the film thickness  $t_{P_1}$  of the first pinned magnetic layer 12 may be selected to be greater than the film thickness  $t_{P_2}$  of the second pinned magnetic layer 14.

As shown in Figs. 7 and 8, the first pinned magnetic layer 12 is magnetized in the Y-direction, i.e., the direction away from the magnetic recording medium (direction of height). The second pinned magnetic layer 14 opposing to the first pinned magnetic layer 12 with the non-magnetic intermediate layer 13 interposed therebetween is magnetized in the antiparallel state (ferrimagnetic state) relative to the magnetization direction of the first pinned magnetic layer 12.

The first pinned magnetic layer 12 is formed in contact with the antiferromagnetic layer 11. When subjected to annealing (heat treatment) under a magnetic field, an exchange-coupled magnetic field (exchange anisotropic magnetic field) is generated at the interface between the first pinned magnetic layer 12 and the antiferromagnetic layer 11 to make the magnetization of the first pinned magnetic layer 12 stationary in the Y-direction, for example, as shown in Figs. 7 and 8. Upon

the magnetization of the first pinned magnetic layer 12 being made stationary in the Y-direction, the magnetization of the second pinned magnetic layer 14 opposing to the first pinned magnetic layer 12 with the non-magnetic intermediate layer 13 interposed therebetween is made stationary in the antiparallel state (ferrimagnetic state) relative to the magnetization of the first pinned magnetic layer 12.

In the spin-valve type magnetoresistive sensor having the above-described structure, the magnetization of the first pinned magnetic layer 12 and the magnetization of the second pinned magnetic layer 14 can be held in the antiparallel state with higher stability under a greater exchange-coupled magnetic field. By employing, as the antiferromagnetic layer 11 of the spin-valve type magnetoresistive sensor of this embodiment, the above-described alloy which has a higher blocking temperature and generates a greater exchange-coupled magnetic field (exchange anisotropic magnetic field) at the interface between the first pinned magnetic layer 12 and the antiferromagnetic layer 11, the magnetized states of the first pinned magnetic layer 12 and the second pinned magnetic layer 14 can be held stable from the thermal point of view as well.

In the spin-valve type magnetoresistive sensor of this embodiment, as described above, by selecting a film thickness ratio of the first pinned magnetic layer 12 to the second pinned magnetic layer 14 so as to fall in a proper range, the

exchange-coupled magnetic field ( $H_{ex}$ ) can be increased, and the magnetization of the first pinned magnetic layer 12 and the magnetization of the second pinned magnetic layer 14 can be held in the antiparallel state (ferrimagnetic state) that is stable from the thermal point of view as well. Further, a good value of  $\Delta MR$  (resistance change rate) can be obtained.

As shown in Figs. 7 and 8, the non-magnetic electrically conductive layer 15 made of Cu, for example, is formed on the second pinned magnetic layer 14, and the free magnetic layer 16 is formed on the non-magnetic electrically conductive layer 15.

The free magnetic layer 16 is formed of two layers as shown in Figs. 7 and 8. One layer denoted by 17 and formed on the side in contact with the non-magnetic electrically conductive layer 15 is formed of a Co film. The other layer 18 is formed of, for example, a NiFe alloy, a CoFe alloy or a CoNiFe alloy.

The reason of forming the layer 17 of a Co film on the side in contact with the non-magnetic electrically conductive layer 15 is that the presence of such a film serves to prevent metal elements, etc. from diffusing at the interface between the free magnetic layer 16 and the non-magnetic electrically conductive layer 15 made of Cu, and to increase the value of  $\Delta MR$  (resistance change rate).

The soft magnetic layers 19, 19 are preferably formed of a NiFe alloy or the like.

The bias layers 130, 130 are made of, similarly to the



antiferromagnetic layer 11, an alloy containing at least one or more elements selected from among Pt, Pd, Ir, Rh, Ru, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn.

The free magnetic layer 16 is magnetized in the X1-direction shown in Figs. 7 and 8 under the effect of a bias magnetic field produced by the bias layer 130.

Further, the electrically conductive layers 131, 131 are preferably made of, for example, Au, W, Cr or Ta.

In the spin-valve type magnetoresistive sensor shown in Figs. 7 and 8, a sensing electric current is applied from the electrically conductive layers 131, 131 electrode layers 28, 28 to the free magnetic layer 16, the non-magnetic electrically conductive layer 15 and the second pinned magnetic layer 14. When a leakage magnetic field is applied from the magnetic recording medium in the Y-direction shown in Figs. 7 and 8, the magnetization direction of the free magnetic layer 16 is varied from the X1-direction toward the Y-direction, whereupon spin-dependent scattering of conduction electrons are caused at the interface between the non-magnetic electrically conductive layer 15 and the free magnetic layer 16 and the interface between the non-magnetic electrically conductive layer 15 and the second pinned magnetic layer 14. As a result, electrical resistance is changed and the leakage magnetic field from the magnetic recording medium can be detected as a change in electrical resistance.

In fact, the sensing electric current also flows to the interface between the first pinned magnetic layer 12 and the non-magnetic intermediate layer 13, etc. The first pinned magnetic layer 12 does not directly contribute to the value of  $\Delta MR$ , and serves as kind of an auxiliary layer for making the magnetization of the second pinned magnetic layer 14, which contributes to the value of  $\Delta MR$ , stationary in a proper direction.

Accordingly, the sensing electric current flowing to the first pinned magnetic layer 12 and the non-magnetic intermediate layer 13 produces a shunt loss (electric current loss). However, an amount of the shunt loss is so very small that the second embodiment can provide  $\Delta MR$  substantially at the same level as conventional.

The spin-valve type magnetoresistive sensor of this second embodiment can be manufactured basically in the same manner as the spin-valve type magnetoresistive sensor shown in Fig. 1.

More specifically, according to the method of manufacturing the spin-valve type magnetoresistive sensor of this second embodiment, the antiferromagnetic layer 11, the first pinned magnetic layer 12, the non-magnetic intermediate layer 13, the second pinned magnetic layer 14, the non-magnetic electrically conductive layer 15 and the free magnetic layer 16 are successively formed on the substrate K one above another, thereby forming a first laminate. Then, the first laminate is

subjected to heat treatment at a first heat treatment temperature while applying a first magnetic field in a direction perpendicular to the direction of the track width  $T_w$ . An exchange anisotropic magnetic field is thereby generated in the antiferromagnetic layer 11 to make the magnetization direction of the first pinned magnetic layer 12 stationary.

Next, with a method of using a lift-off resist, the soft magnetic layers 19, 19 are formed on the first laminate while a spacing corresponding to the track width  $T_w$  is left between the soft magnetic layers 19, 19. Subsequently, the bias layers 130, 130 are formed respectively on the soft magnetic layers 19, 19, and the electrically conductive layers 131, 131 are formed respectively on the bias layers 130, 130. A second laminate having the same configuration as the spin-valve type magnetoresistive sensor shown in Figs. 7 and 8 is thereby obtained.

The second laminate thus obtained is subjected to heat treatment at a second heat treatment temperature in the direction of the track width  $T_w$  while applying a second magnetic field smaller than the exchange anisotropic magnetic field of the antiferromagnetic layer 11, whereby a bias magnetic field is applied to the free magnetic layer 16 in a direction crossing the magnetization directions of the first pinned magnetic layer 12 and the second pinned magnetic layer 14. As a result, the spin-valve type magnetoresistive sensor shown in Figs. 7 and 8

is obtained.

In the spin-valve type magnetoresistive sensor thus constructed, the antiferromagnetic layer 11 and the bias layer 130 are each likewise made of an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn. Therefore, the exchange anisotropic magnetic field has a good temperature characteristic, and the spin-valve type magnetoresistive sensor has superior heat resistance.

Also, the spin-valve type magnetoresistive sensor has good durability even when it is provided in a device such as a magnetoresistive head where the inside temperature reaches a high level, and exhibits a less variation in the exchange anisotropic magnetic field (exchange-coupled magnetic field) with a temperature change.

Further, by forming the antiferromagnetic layer 11 of the above-mentioned alloy, the blocking temperature can be raised and a greater exchange anisotropic magnetic field can be generated in the antiferromagnetic layer 11. As a result, the magnetization directions of the first pinned magnetic layer 12 and the second pinned magnetic layer 14 can be firmly held stationary.

With the method of manufacturing the spin-valve type magnetoresistive sensor of this embodiment, an alloy containing at least one or more elements selected from among Pt, Pd, Rh,

Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn is used for the antiferromagnetic layer 11 and the bias layer 130. By utilizing properties of such an alloy, the magnetization direction of the first pinned magnetic layer 12 is made stationary by the first heat treatment, and the magnetization direction of the free magnetic layer 16 is uniformly arranged in a direction crossing the magnetization directions of the first pinned magnetic layer 12 and the second pinned magnetic layer 14 by the second heat treatment. It is therefore possible to uniformly arrange the magnetization direction of the free magnetic layer 16 in a direction crossing the magnetization directions of the first pinned magnetic layer 12 and the second pinned magnetic layer 14 without adversely affecting the magnetization direction of the first pinned magnetic layer 12, and to provide a spin-valve type magnetoresistive sensor having superior heat resistance.

Also, with the method of manufacturing the spin-valve type magnetoresistive sensor, the soft magnetic layers 19, 19 are formed on the first laminate, and the bias layers 130, 130 are formed respectively on the soft magnetic layers 19, 19. After forming the soft magnetic layers 19, 19, therefore, the bias layers 130, 130 can be formed without breaking a vacuum. This means no necessity of cleaning a surface, on which the bias layers 130, 130 are to be formed, by ion milling or reverse sputtering. As a result, the manufacturing method is superior in being free

from a drawback attributable to the cleaning, such as an adverse effect upon generation of the exchange anisotropic magnetic field caused by contamination with foreign matters deposited again on the surface or disorder of the crystal state at the surface.

Moreover, the manufacturing process is facilitated because of no necessity of cleaning the surface, on which the bias layers 130, 130 are to be formed, before forming the bias layers 130, 130.

[Third Embodiment]

Fig. 9 is a cross-sectional view schematically showing a spin-valve type magnetoresistive sensor according to a third embodiment of the present invention, and Fig. 10 is a sectional view showing the structure of the spin-valve type magnetoresistive sensor shown in Fig. 9, as viewed from the side facing a recording medium.

Similarly to the spin-valve type magnetoresistive sensors described above, the spin-valve type magnetoresistive sensor of this embodiment is also provided, for example, on a trailing end face of a floating slider mounted in a hard disk device, and is used to detect a magnetic field recorded on a hard disk or the like.

In Figs. 9 and 10, a Z-direction represents the moving direction of a magnetic recording medium such as a hard disk, and a Y-direction represents the direction of a leakage magnetic

field from the magnetic recording medium.

Also in the spin-valve type magnetoresistive sensor of this embodiment, a magnetization direction of a free magnetic layer is uniformly arranged so as to cross a magnetization direction of a pinned magnetic layer based on exchange biasing by using a bias layer made of an antiferromagnetic material.

The spin-valve type magnetoresistive sensor of this embodiment is featured in that, in addition to the pinned magnetic layer, the free magnetic layer is also divided into two layers, i.e., a first free magnetic layer and a second free magnetic layer, with a non-magnetic intermediate layer interposed between the two layers.

In Figs. 9 and 10, character K denotes a substrate. On the substrate K, an insulating underlying layer 200 made of  $Al_2O_3$ , for example, a lower shielding layer 163, a lower gap layer 164, and an antiferromagnetic layer 51 are formed in succession. Further, on the antiferromagnetic layer 51, a first pinned magnetic layer 52, a non-magnetic intermediate layer 53, a second pinned magnetic layer 54, a non-magnetic electrically conductive layer 55, a second free magnetic layer 56, a non-magnetic intermediate layer 59 and a first free magnetic layer 60 are successively formed in this order one above another.

On the first free magnetic layer 60, as shown in Fig. 10, a pair of soft magnetic layers 61, 61 are formed while a spacing corresponding to a track width  $T_w$  is left between the soft

magnetic layers 61, 61. A pair of bias layers 62, 62 are formed respectively on the soft magnetic layers 61, 61, and a pair of electrically conductive layers 63, 63 are formed respectively on the bias layers 62, 62.

In the spin-valve type magnetoresistive sensor according to the third embodiment of the present invention, as with the spin-valve type magnetoresistive sensors described above, the antiferromagnetic layer 51 is made of an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn. The antiferromagnetic layer 51 acts to magnetize the first pinned magnetic layer 52 and the second pinned magnetic layer 54 in respective certain directions when subjected to heat treatment under a magnetic field.

The first pinned magnetic layer 52 and the second pinned magnetic layer 54 are each formed of, for example, a Co film, a NiFe alloy, a CoFe alloy, a CoNiFe alloy, or a CoNi alloy.

The non-magnetic intermediate layer 53 is preferably made of one selected from among Ru, Rh, Ir, Cr, Re and Cu, or an alloy of two or more selected from among them.

The first pinned magnetic layer 52 is formed in contact with the antiferromagnetic layer 51. When subjected to annealing (heat treatment) under a magnetic field, an exchange-coupled magnetic field (exchange anisotropic magnetic field) is generated at the interface between the first pinned



magnetic layer 52 and the antiferromagnetic layer 51 to make the magnetization of the first pinned magnetic layer 22 stationary in the Y-direction, for example, as shown in Figs. 9 and 10. Upon the magnetization of the first pinned magnetic layer 52 being made stationary in the Y-direction, the magnetization of the second pinned magnetic layer 54 opposing to the first pinned magnetic layer 52 with the non-magnetic intermediate layer 53 interposed therebetween is made stationary in the antiparallel state (ferrimagnetic state) relative to the magnetization of the first pinned magnetic layer 52.

To hold stability of the ferrimagnetic state, a greater exchange anisotropic magnetic field is required. In the spin-valve type magnetoresistive sensor of this embodiment, by employing, as the antiferromagnetic layer 51, the above-described alloy which has a higher blocking temperature and generates a greater exchange-coupled magnetic field (exchange anisotropic magnetic field) at the interface between the first pinned magnetic layer 52 and the antiferromagnetic layer 51, the magnetized states of the first pinned magnetic layer 52 and the second pinned magnetic layer 54 can be held stable from the thermal point of view as well.

The non-magnetic electrically conductive layer 55 is preferably made of Cu, for example.

The second free magnetic layer 56 is formed of two layers as shown in Figs. 9 and 10. A Co film 57 is formed on the side

in contact with the non-magnetic electrically conductive layer 55. The reason of forming the Co film 57 on the side in contact with the non-magnetic electrically conductive layer 55 is that the presence of the Co film serves first to increase the value of  $\Delta MR$  and secondly to prevent metal elements, etc. from diffusing at the interface between the second free magnetic layer 56 and the non-magnetic electrically conductive layer 55.

A NiFe alloy film 58 is formed on the Co film 57, and a non-magnetic intermediate layer 59 is formed on the NiFe alloy film 58. Then, the first free magnetic layer 60 is formed on the non-magnetic intermediate layer 59.

The first free magnetic layer 60 is formed of, for example, a Co film, a NiFe alloy, a CoFe alloy, a CoNiFe alloy, or a CoNi alloy.

The non-magnetic intermediate layer 59 interposed between the second free magnetic layer 56 and the first free magnetic layer 60 is preferably made of one selected from among Ru, Rh, Ir, Cr, Re and Cu, or an alloy of two or more selected from among them.

The magnetization of the second free magnetic layer 56 and the magnetization of the first free magnetic layer 60 are produced in the antiparallel state (ferrimagnetic state) to each other, as shown in Figs. 9 and 10, due to an exchange-coupled magnetic field (RKKY interaction) generated between the second free magnetic layer 56 and the first free magnetic layer 60.

In the spin-valve type magnetoresistive sensor shown in Figs. 9 and 10, the first free magnetic layer 56 and the second free magnetic layer 60 are formed, by way of example, such that a film thickness  $t_{F_2}$  of the second free magnetic layer 56 is greater than a film thickness  $t_{F_1}$  of the first free magnetic layer 60.

Then,  $M_s \cdot t_{F_2}$  of the second free magnetic layer 56 is set to be smaller than  $M_s \cdot t_{F_1}$  of the first free magnetic layer 60. When a bias magnetic field is applied from the bias layer 62 in a direction opposing to the X1-direction shown in Figs. 9 and 10, the magnetization of the first free magnetic layer 60 having a greater value of  $M_s \cdot t_{F_1}$  is uniformly arranged in the direction opposing to the X1-direction under the effect of the bias magnetic field. Also, the magnetization of the second free magnetic layer 56 having a smaller value of  $M_s \cdot t_{F_2}$  is uniformly arranged in the X1-direction due to the exchange-coupled magnetic field (RKKY interaction) generated between the second free magnetic layer 56 and the first free magnetic layer 60.

Upon an external magnetic field being applied in the Y-direction shown in Figs. 9 and 10, the magnetization of the second free magnetic layer 56 and the magnetization of the first free magnetic layer 60 are rotated under the effect of the external magnetic field while the ferrimagnetic state is kept. Then, electrical resistance is changed depending on the relationship between the varying magnetization of the second

free magnetic layer 56 which contributes to the value of  $\Delta MR$  and the stationary magnetization of the second pinned magnetic layer 54 (magnetized, for example, in a direction opposing to the Y-direction), and the external magnetic field can be detected as a change in electrical resistance.

The soft magnetic layers 61, 61 are preferably formed of, for example, a NiFe alloy.

The bias layers 62, 62 are made of, similarly to the antiferromagnetic layer 51, an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn.

Further, the electrically conductive layers 63, 63 are preferably made of, for example, Au, W, Cr or Ta.

The spin-valve type magnetoresistive sensor of this third embodiment can also be manufactured basically in the same manner as the spin-valve type magnetoresistive sensor shown in Fig. 1.

More specifically, according to the method of manufacturing the spin-valve type magnetoresistive sensor of this third embodiment, the antiferromagnetic layer 51, the first pinned magnetic layer 52, the non-magnetic intermediate layer 53, the second pinned magnetic layer 54, the non-magnetic electrically conductive layer 55, the second free magnetic layer 56, the non-magnetic intermediate layer 59 and the first free magnetic layer 60 are successively formed on the substrate K one above another, thereby forming a first laminate. Then, the first

laminate is subjected to heat treatment at a first heat treatment temperature while applying a first magnetic field in a direction perpendicular to the direction of the track width  $T_w$ . An exchange anisotropic magnetic field is thereby generated in the antiferromagnetic layer 51 to make the magnetization direction of the first pinned magnetic layer 52 stationary.

Next, with a method of using a lift-off resist, the soft magnetic layers 61, 61 are formed on the first laminate while a spacing corresponding to the track width  $T_w$  is left between the soft magnetic layers 61, 61. Subsequently, the bias layers 62, 62 are formed respectively on the soft magnetic layers 61, 61, and the electrically conductive layers 63, 63 are formed respectively on the bias layers 62, 62. A second laminate having the same configuration as the spin-valve type magnetoresistive sensor shown in Figs. 9 and 10 is thereby obtained.

The second laminate thus obtained is subjected to heat treatment at a second heat treatment temperature while applying a second magnetic field in the direction of the track width  $T_w$  smaller than the exchange anisotropic magnetic field of the antiferromagnetic layer 51, whereby a bias magnetic field is applied to the first free magnetic layer 60 in a direction crossing the magnetization directions of the first pinned magnetic layer 52 and the second pinned magnetic layer 54. As a result, the spin-valve type magnetoresistive sensor shown in Figs. 9 and 10 is obtained.

In the spin-valve type magnetoresistive sensor thus constructed, the antiferromagnetic layer 51 and the bias layer 62 are each likewise made of an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn. Therefore, the exchange anisotropic magnetic field has a good temperature characteristic, and the spin-valve type magnetoresistive sensor has superior heat resistance.

Also, the spin-valve type magnetoresistive sensor has good durability even when it is provided in a device such as a magnetoresistive head where the sensor temperature reaches a high level due to an increased environment temperature in the hard disk device and Joule heat produced by a sensing electric current flowing in the sensor, and exhibits a less variation in the exchange anisotropic magnetic field (exchange-coupled magnetic field) with a temperature change.

Further, by forming the antiferromagnetic layer 51 of the above-mentioned alloy, the blocking temperature can be raised and a greater exchange anisotropic magnetic field can be generated in the antiferromagnetic layer 51. As a result, the magnetization directions of the first pinned magnetic layer 52 and the second pinned magnetic layer 54 can be firmly held stationary.

With the method of manufacturing the spin-valve type magnetoresistive sensor of this embodiment, an alloy containing

at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn is used for the antiferromagnetic layer 51 and the bias layer 62. By utilizing properties of such an alloy, the magnetization direction of the first pinned magnetic layer 52 is made stationary by the first heat treatment, and the magnetization direction of the first free magnetic layer 60 is uniformly arranged in a direction crossing the magnetization directions of the first pinned magnetic layer 52 and the second pinned magnetic layer 54 by the second heat treatment. It is therefore possible to uniformly arrange the magnetization directions of the second free magnetic layer 56 and the first free magnetic layer 60 in directions crossing the magnetization directions of the first pinned magnetic layer 52 and the second pinned magnetic layer 54 without adversely affecting the magnetization direction of the first pinned magnetic layer 52, and to provide a spin-valve type magnetoresistive sensor having superior heat resistance.

Also, with the method of manufacturing the spin-valve type magnetoresistive sensor, the soft magnetic layers 61, 61 are formed on the first laminate, and the bias layers 62, 62 are formed respectively on the soft magnetic layers 61, 61. After forming the soft magnetic layers 61, 61, therefore, the bias layers 62, 62 can be formed without breaking a vacuum. This means no necessity of cleaning a surface, on which the bias layers 62, 62 are to be formed, by ion milling or reverse sputtering. As

a result, the manufacturing method is superior in being free from a drawback attributable to the cleaning, such as an adverse effect upon generation of the exchange anisotropic magnetic field caused by contamination with foreign matters deposited again on the surface or disorder of the crystal state at the surface.

Moreover, the manufacturing process is facilitated because of no necessity of cleaning the surface, on which the bias layers 62, 62 are to be formed, before forming the bias layers 62, 62.

[Action of Sensing-Current Magnetic Field]

A description is now made of the action of a sensing-current magnetic field in the structures of the second and third embodiments shown in Figs. 7 to 10.

In the spin-valve type magnetoresistive sensor shown in Figs. 7 and 8, the second pinned magnetic layer 14 is formed under the non-magnetic electrically conductive layer 15. In this structure, a direction of the sensing-current magnetic field is set in coincidence with the magnetization direction of one of the first pinned magnetic layer 12 and the second pinned magnetic layer 14 which has a greater magnetic moment.

As shown in Fig. 7, the magnetic moment of the second pinned magnetic layer 14 is greater than the magnetic moment of the first pinned magnetic layer 12, and is oriented in a direction opposing to the Y-direction (to the left) in Fig. 7. Therefore, a resultant magnetic moment resulting from adding the magnetic



moment of the first pinned magnetic layer 12 and the magnetic moment of the second pinned magnetic layer 14 is oriented in the direction opposing to the Y-direction (to the left) in Fig. 7.

As described above, the non-magnetic electrically conductive layer 15 is formed on the upper side of the second pinned magnetic layer 14 and the second pinned magnetic layer 12. Accordingly, it is just required to control a flowing direction of a sensing electric current 112 such that the sensing-current magnetic field formed by the sensing electric current 112 flowing mainly in the non-magnetic electrically conductive layer 15 is oriented to the left in Fig. 7 on the lower side of the non-magnetic electrically conductive layer 15. By so making control, the direction of the sensing-current magnetic field is coincident with the direction of the resultant magnetic moment of the first pinned magnetic layer 12 and the second pinned magnetic layer 14.

As shown in Fig. 7, the sensing electric current 112 is applied to flow in the X1-direction. Based on the right-handed screw rule, the sensing-current magnetic field developed with flowing of the sensing electric current 112 is formed in the right-handed (clockwise) direction relative to the drawing sheet of Fig. 7. Accordingly, the sensing-current magnetic field is applied to the layer under the non-magnetic electrically conductive layer 15 in a direction indicated by arrow (i.e., direction opposing to the Y-direction) shown in Fig. 7. With

application of the sensing electric current, therefore, the sensing-current magnetic field acts in a direction to enhance the resultant magnetic moment and to amplify the exchange-coupled magnetic field (RKKY interaction) acting between the first pinned magnetic layer 12 and the second pinned magnetic layer 14. The magnetization of the first pinned magnetic layer 12 and the magnetization of the second pinned magnetic layer 14 can be thereby held in the antiparallel state with higher stability from the thermal point of view.

In particular, it is known that, when a sensing electric current of 1 mA is applied, a sensing-current magnetic field of approximately 30 (Oe) is generated and the sensor temperature is raised about 10°C. Further, the rotational speed of a recording medium is increased to a level of about 10000 rpm and, with such an increase in rotational speed, the temperature in a device is raised up to about 100°C at maximum. Accordingly, when a sensing electric current of 1 mA, for example, is applied, the temperature of the spin-valve type magnetoresistive sensor is raised up to about 200°C and the sensing-current magnetic field is increased up to 300 (Oe).

In such a case where the sensor is operated at a very high environment temperature and a large sensing electric current flows in the sensor, the antiparallel state of the magnetization of the first pinned magnetic layer 12 and the magnetization of the second pinned magnetic layer 14 is apt to easily break if

the sensing-current magnetic field is generated in a direction opposing to the direction of the resultant magnetic moment resulting from adding the magnetic moment of the first pinned magnetic layer 12 and the magnetic moment of the second pinned magnetic layer 14.

Further, to make the sensor endurable even at a very high environment temperature, it is also required to use, as the antiferromagnetic layer 11, an antiferromagnetic material having a higher blocking temperature, in addition to proper setting of the direction of the sensing-current magnetic field. For this reason, the above-mentioned alloy having a higher blocking temperature is used in the present invention.

Alternatively, where the resultant magnetic moment formed by the magnetic moment of the first pinned magnetic layer 12 and the magnetic moment of the second pinned magnetic layer 14 shown in Fig. 7 is oriented to the right (in the Y-direction), the sensing electric current is applied to flow in a direction opposing to the X1-direction so that the sensing-current magnetic field is formed in the left-handed (counterclockwise) direction relative to the drawing sheet of Fig. 7.

Figs. 9 and 10 show an embodiment of the spin-valve type magnetoresistive sensor in which the free magnetic layer is divided into two layers, i.e., the first free magnetic layer and the second free magnetic layer, with the non-magnetic intermediate layer interposed between the two layers. In the

case where the first pinned magnetic layer 52 and the second pinned magnetic layer 54 are formed on the lower side of the non-magnetic electrically conductive layer 55 like the spin-valve type magnetoresistive sensor shown in Fig. 9, it is also just required to control the direction of the sensing electric current as with the spin-valve type magnetoresistive sensor shown in Fig. 7.

In each of the second and third embodiments, as described above, by setting the direction of the sensing-current magnetic field, which is developed with flowing of the sensing electric current, to be coincident with the direction of the resultant magnetic moment resulting from adding the magnetic moment of the first pinned magnetic layer and the magnetic moment of the second pinned magnetic layer, the exchange-coupled magnetic field (RKKY interaction) acting between the first pinned magnetic layer and the second pinned magnetic layer is amplified so that the magnetization of the first pinned magnetic layer and the magnetization of the second pinned magnetic layer can be held in the antiparallel state (ferrimagnetic state) with higher stability from the thermal point of view.

Particularly, in the second and third embodiments, an antiferromagnetic material having a higher blocking temperature is used for the antiferromagnetic layer 2 to improve thermal stability. Even with the environment temperature raised to a level much higher than in a conventional sensor, therefore, it

is possible to hold the magnetization of the first pinned magnetic layer 12 and the magnetization of the second pinned magnetic layer 14 in the antiparallel state (ferrimagnetic state) with higher certainty.

Also, if an amount of the sensing electric current is increased to increase a reproduced output to be adapted for a higher recording density, the sensing-current magnetic field is increased correspondingly. In the second and third embodiments of the present invention, however, since the sensing-current magnetic field acts to amplify the exchange-coupled magnetic field developed between the first pinned magnetic layer and the second pinned magnetic layer, the magnetized states of the first pinned magnetic layer and the second pinned magnetic layer can be held with higher stability due to an increase in the sensing-current magnetic field.

Incidentally, the above-described control for the direction of the sensing electric current is applicable to any case regardless of which antiferromagnetic material is used for the antiferromagnetic layer. For example, it is not essential whether heat treatment is required to generate the exchange-coupled magnetic field (exchange anisotropic magnetic field) at the interface between the antiferromagnetic layer and the pinned magnetic layer (first pinned magnetic layer).

Furthermore, even in a single-spin-valve type magnetoresistive sensor wherein the pinned magnetic layer is

formed as a single layer, like the first embodiment shown in Fig. 1, the magnetization of the pinned magnetic layer can be thermally stabilized by setting the direction of the sensing-current magnetic field, which is developed with flowing of the sensing electric current, to be coincident with the magnetization direction of the pinned magnetic layer.

[Fourth Embodiment]

Fig. 11 is a sectional view showing the structure of a spin-valve type magnetoresistive sensor according to a fourth embodiment of the present invention, as viewed from the side facing a recording medium.

Similarly to the spin-valve type magnetoresistive sensor shown in Fig. 1, the spin-valve type magnetoresistive sensor of this embodiment is also provided, for example, on a trailing end face of a floating slider mounted in a hard disk device, and is used to detect a magnetic field recorded on a hard disk or the like.

In Fig. 11, a Z-direction represents the moving direction of a magnetic recording medium such as a hard disk, and a Y-direction represents the direction of a leakage magnetic field from the magnetic recording medium.

Also in the spin-valve type magnetoresistive sensor of this embodiment, a magnetization direction of a free magnetic layer is uniformly arranged so as to cross a magnetization direction of a pinned magnetic layer based on exchange biasing by using

a bias layer made of an antiferromagnetic material.

The spin-valve type magnetoresistive sensor of this embodiment is featured in that, in addition to the pinned magnetic layer, the free magnetic layer is also divided into two layers, i.e., a first free magnetic layer and a second free magnetic layer, with a non-magnetic intermediate layer interposed between the two layers.

In Fig. 11, character K denotes a substrate. On the substrate K, as with the third embodiment shown in Fig. 10, an insulating underlying layer 200 made of  $Al_2O_3$ , for example, a lower shielding layer 163, a lower gap layer 164, and an antiferromagnetic layer 51 are formed in succession. Further, on the antiferromagnetic layer 51, a first pinned magnetic layer 52, a non-magnetic intermediate layer 53, a second pinned magnetic layer 54, a non-magnetic electrically conductive layer 55, a second free magnetic layer 56, a non-magnetic intermediate layer 59 and a first free magnetic layer 60 are successively formed in this order one above another.

A pair of recesses 60a, 60a are formed in the first free magnetic layer 60 on both sides of its central area corresponding to a track width Tw. A pair of soft magnetic layers 61, 61 are formed to respectively fill the recesses 60a, 60a while a spacing corresponding to the track width Tw is left between the soft magnetic layers 61, 61. A pair of bias layers 62, 62 are formed respectively on the soft magnetic layers 61, 61, and a pair of

electrically conductive layers 63, 63 are formed respectively on the bias layers 62, 62.

In the spin-valve type magnetoresistive sensor according to the fourth embodiment of the present invention, as with the spin-valve type magnetoresistive sensors described above, the antiferromagnetic layer 51 is made of an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn. The antiferromagnetic layer 51 acts to magnetize the first pinned magnetic layer 52 and the second pinned magnetic layer 54 in respective certain directions when subjected to heat treatment under a magnetic field.

The first pinned magnetic layer 52 and the second pinned magnetic layer 54 are each formed of, for example, a Co film, a NiFe alloy, a CoFe alloy, a CoNiFe alloy, or a CoNi alloy. The non-magnetic intermediate layer 53 is preferably made of one selected from among Ru, Rh, Ir, Cr, Re and Cu, or an alloy of two or more selected from among them.

The first pinned magnetic layer 52 is formed in contact with the antiferromagnetic layer 51. When subjected to annealing (heat treatment) under a magnetic field, an exchange-coupled magnetic field (exchange anisotropic magnetic field) is generated at the interface between the first pinned magnetic layer 52 and the antiferromagnetic layer 51 to make the magnetization of the first pinned magnetic layer 22 stationary



in the Y-direction, for example, as shown in Fig. 11. Upon the magnetization of the first pinned magnetic layer 52 being made stationary in the Y-direction, the magnetization of the second pinned magnetic layer 54 opposing to the first pinned magnetic layer 52 with the non-magnetic intermediate layer 53 interposed therebetween is made stationary in the antiparallel state (ferrimagnetic state) relative to the magnetization of the first pinned magnetic layer 52.

To hold stability of the ferrimagnetic state, a greater exchange anisotropic magnetic field is required. In the spin-valve type magnetoresistive sensor of this embodiment, by employing, as the antiferromagnetic layer 51, the above-described alloy which has a higher blocking temperature and generates a greater exchange-coupled magnetic field (exchange anisotropic magnetic field) at the interface between the first pinned magnetic layer 52 and the antiferromagnetic layer 51, the magnetized states of the first pinned magnetic layer 52 and the second pinned magnetic layer 54 can be held stable from the thermal point of view as well.

The non-magnetic electrically conductive layer 55 is preferably made of Cu, for example.

The second free magnetic layer 56 is formed of two layers as shown in Fig. 11. A Co film 57 is formed on the side in contact with the non-magnetic electrically conductive layer 55. The reason of forming the Co film 57 on the side in contact with the

non-magnetic electrically conductive layer 55 is that the presence of the Co film serves first to increase the value of  $\Delta MR$  and secondly to prevent metal elements, etc. from diffusing at the interface between the second free magnetic layer 56 and the non-magnetic electrically conductive layer 55.

A NiFe alloy film 58 is formed on the Co film 57, and a non-magnetic intermediate layer 59 is formed on the NiFe alloy film 58. Then, the first free magnetic layer 60 is formed on the non-magnetic intermediate layer 59.

The first free magnetic layer 60 is formed of, for example, a Co film, a NiFe alloy, a CoFe alloy, a CoNiFe alloy, or a CoNi alloy.

The non-magnetic intermediate layer 59 interposed between the second free magnetic layer 56 and the first free magnetic layer 60 is preferably made of one selected from among Ru, Rh, Ir, Cr, Re and Cu, or an alloy of two or more selected from among them.

The magnetization of the second free magnetic layer 56 and the magnetization of the first free magnetic layer 60 are produced in the antiparallel state (ferrimagnetic state) to each other, as shown in Fig. 11, due to an exchange-coupled magnetic field (RKKY interaction) generated between the second free magnetic layer 56 and the first free magnetic layer 60.

In the spin-valve type magnetoresistive sensor shown in Fig. 11, the first free magnetic layer 56 and the second free

magnetic layer 60 are formed, by way of example, such that a film thickness  $tF_2$  of the second free magnetic layer 56 is greater than a film thickness  $tF_1$  of the first free magnetic layer 60.

Then,  $M_s \cdot tF_2$  of the second free magnetic layer 56 is set to be smaller than  $M_s \cdot tF_1$  of the first free magnetic layer 60. When a bias magnetic field is applied from the bias layer 62 in a direction opposing to the X1-direction shown in Fig. 11, the magnetization of the first free magnetic layer 60 having a greater value of  $M_s \cdot tF_1$  is uniformly arranged in the direction opposing to the X1-direction under the effect of the bias magnetic field. Also, the magnetization of the second free magnetic layer 56 having a smaller value of  $M_s \cdot tF_2$  is uniformly arranged in the X1-direction due to the exchange-coupled magnetic field (RKKY interaction) generated between the second free magnetic layer 56 and the first free magnetic layer 60.

Upon an external magnetic field being applied in the Y-direction shown in Fig. 11, the magnetization of the second free magnetic layer 56 and the magnetization of the first free magnetic layer 60 are rotated under the effect of the external magnetic field while the ferrimagnetic state is kept. Then, electrical resistance is changed depending on the relationship between the varying magnetization of the second free magnetic layer 56 which contributes to the value of  $\Delta MR$  and the stationary magnetization of the second pinned magnetic layer 54 (magnetized, for example, in a direction opposing to the Y-direction), and

the external magnetic field can be detected as a change in electrical resistance.

The soft magnetic layers 61, 61 are preferably formed of, for example, a NiFe alloy.

The bias layers 62, 62 are made of, similarly to the antiferromagnetic layer 51, an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn.

Further, the electrically conductive layers 63, 63 are preferably made of, for example, Au, W, Cr or Ta.

The spin-valve type magnetoresistive sensor of this fourth embodiment can also be manufactured basically in the same manner as the spin-valve type magnetoresistive sensor shown in Fig. 10.

More specifically, according to the method of manufacturing the spin-valve type magnetoresistive sensor of this fourth embodiment, the antiferromagnetic layer 51, the first pinned magnetic layer 52, the non-magnetic intermediate layer 53, the second pinned magnetic layer 54, the non-magnetic electrically conductive layer 55, the second free magnetic layer 56, the non-magnetic intermediate layer 59 and the first free magnetic layer 60 are successively formed on the substrate K one above another, thereby forming a first laminate. Then, the first laminate is subjected to heat treatment at a first heat treatment temperature while applying a first magnetic field in a direction perpendicular to the direction of the track width  $T_w$ . An

exchange anisotropic magnetic field is thereby generated in the antiferromagnetic layer 51 to make the magnetization direction of the first pinned magnetic layer 52 stationary.

Next, as shown in Fig. 12, the recesses 60a, 60a are formed in the uppermost layer of the first laminate by steps of forming a lift-off resist 350, which has a width corresponding to the track width, on the first laminate, and removing a part, e.g., a few tenths, of the first free magnetic layer 60 by ion milling, etc. Then, the soft magnetic layers 61, 61 are formed to respectively fill the recesses 60a, 60a while a spacing corresponding to the track width  $T_w$  is left between the soft magnetic layers 61, 61. Subsequently, the bias layers 62, 62 are formed respectively on the soft magnetic layers 61, 61, and the electrically conductive layers 63, 63 are formed respectively on the bias layers 62, 62. A second laminate having the same configuration as the spin-valve type magnetoresistive sensors of the foregoing embodiment is thereby obtained.

The second laminate thus obtained is subjected to heat treatment at a second heat treatment temperature while applying a second magnetic field in the direction of the track width  $T_w$  smaller than the exchange anisotropic magnetic field of the antiferromagnetic layer 51, whereby a bias magnetic field is applied to the first free magnetic layer 60 in a direction crossing the magnetization directions of the first pinned magnetic layer 52 and the second pinned magnetic layer 54. As

a result, the spin-valve type magnetoresistive sensor shown in Fig. 11 is obtained.

In the spin-valve type magnetoresistive sensor thus constructed, the antiferromagnetic layer 51 and the bias layer 62 are each likewise made of an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn. Therefore, the exchange anisotropic magnetic field has a good temperature characteristic, and the spin-valve type magnetoresistive sensor has superior heat resistance.

Also, the spin-valve type magnetoresistive sensor has good durability even when it is provided in a device such as a magnetoresistive head where the sensor temperature reaches a high level due to an increased environment temperature in the hard disk device and Joule heat produced by a sensing electric current flowing in the sensor, and exhibits a less variation in the exchange anisotropic magnetic field (exchange-coupled magnetic field) with a temperature change.

Further, by forming the antiferromagnetic layer 51 of the above-mentioned alloy, the blocking temperature can be raised and a greater exchange anisotropic magnetic field can be generated in the antiferromagnetic layer 51. As a result, the magnetization directions of the first pinned magnetic layer 52 and the second pinned magnetic layer 54 can be firmly held stationary.

With the method of manufacturing the spin-valve type magnetoresistive sensor of this embodiment, an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn is used for the antiferromagnetic layer 51 and the bias layer 62. By utilizing properties of such an alloy, the magnetization direction of the first pinned magnetic layer 52 is made stationary by the first heat treatment, and the magnetization direction of the first free magnetic layer 60 is uniformly arranged in a direction crossing the magnetization directions of the first pinned magnetic layer 52 and the second pinned magnetic layer 54 by the second heat treatment. It is therefore possible to uniformly arrange the magnetization directions of the second free magnetic layer 56 and the first free magnetic layer 60 in directions crossing the magnetization directions of the first pinned magnetic layer 52 and the second pinned magnetic layer 54 without adversely affecting the magnetization direction of the first pinned magnetic layer 52, and to provide a spin-valve type magnetoresistive sensor having superior heat resistance.

[Example]

The spin-valve type magnetoresistive sensor having the structure shown in Figs. 1 and 2 was formed on an AlTiC ( $\text{Al}_2\text{O}_3$ -TiC) substrate on which a lower shielding layer (Co-Nb-Zr based amorphous alloy) and a lower gap layer ( $\text{Al}_2\text{O}_3$ ) were successively formed. On the substrate, an antiferromagnetic layer made of

a  $\text{Pt}_{50}\text{Mn}_{50}$  alloy and having a thickness of 150 Å, a first pinned magnetic layer made of Co and having a thickness of 15 Å, a non-magnetic intermediate layer made of Ru and having a thickness of 8 Å, a second pinned magnetic layer made of Co and having a thickness of 25 Å, and a non-magnetic electrically conductive layer made of Cu and having a thickness of 25 Å were formed in this order one above another. Further, a second free magnetic layer (saturation magnetization  $M_s \times \text{film thickness } t = 7.16 \times 10^{-4} \text{ T}\cdot\text{nm}$ ) made of a  $\text{Ni}_{80}\text{Fe}_{20}$  alloy and having a thickness of 40 Å, a non-magnetic intermediate layer made of Ru and having a thickness of 8 Å, a first free magnetic layer (saturation magnetization  $M_s \times \text{film thickness } t = 4.52 \times 10^{-4} \text{ T}\cdot\text{nm}$ ) made of a  $\text{Ni}_{80}\text{Fe}_{20}$  alloy and having a thickness of 25 Å were formed in this order one above another, thereby forming a laminate. The first and second free magnetic layers each had a width of 0.6  $\mu\text{m}$  in the direction of the track width, and a size of 0.4  $\mu\text{m}$  in the direction of height of the sensor perpendicular to the direction of the track width. On each of surface areas of the laminate at both sides of a central vacant space corresponding to the track width, a soft magnetic layer made of a  $\text{Ni}_{80}\text{Fe}_{20}$  alloy and having a thickness of 20 Å were formed in contact with the first free magnetic layer, followed by forming an antiferromagnetic layer made of a  $\text{Pt}_{54}\text{Mn}_{46}$  alloy and having a thickness of 300 Å and an electrically conductive layer made of Cr and having a thickness of 1000 Å thereon in this order.



An antiparallel-coupled magnetic field generated between the first free magnetic layer and the second free magnetic layer in the multilayer structure described above was 58.4 kA/m.

Next, as Comparative Example, a laminate made up of an antiferromagnetic layer, a first pinned magnetic layer, a non-magnetic intermediate layer, a second pinned magnetic layer, a non-magnetic electrically conductive layer, a second free magnetic layer, a non-magnetic intermediate layer and a first free magnetic layer was formed in the same structure as the laminate in the above Example. On each of both right and left sides of the laminate, a hard bias layer (saturation magnetization  $M_s \times \text{film thickness } t = 1.88 \times 10^{-3} \text{ T}\cdot\text{nm}$ ) made of a  $\text{Co}_{85}\text{Pt}_{15}$  alloy was formed with a non-magnetic layer, made of Cr and having a thickness of 20 Å, interposed therebetween.

As a result of magnetic simulation made on both the sensors having the above-mentioned structures, Fig. 25 illustrates magnetization direction of the first free magnetic layer and magnetization direction of the second free magnetic layer, which should be oriented in a direction along the film surface, in the structure of Example, whereas Fig. 20 illustrates magnetization direction of the first free magnetic layer and magnetization direction of the second free magnetic layer, which should be oriented in a direction along the film surface, in the structure of Comparative Example.

In the multilayer structure of Example according to the

present invention, as indicated by arrows in Fig. 25, a longitudinal magnetic field can be just imparted to the first free magnetic layer and there occurs no disorder of the magnetization direction in both peripheral areas of the first free magnetic layer and the second free magnetic layer. It is thus apparent that, by employing the structure of the present invention, a magnetic conflict (frustration) is eliminated unlike the conventional structure of Comparative Example (Fig. 20), and the first free magnetic layer and the second free magnetic layer are both magnetized in even distribution.

On the other hand, in the conventional structure of Comparative Example wherein the magnetization direction is indicated by arrows in Fig. 20, it is apparent that the magnetization direction is disordered at both ends of the first and second free magnetic layers because a strong reversed magnetic field is applied from the hard bias films at right and left ends of the first free magnetic layer and conflicts with the exchange anisotropic magnetic field to be developed by the second free magnetic layer. This disorders the magnetization direction of the second free magnetic layer as well and causes such a problem as Barkhausen noise, thus resulting in a risk that magnetic stability may become poor.

A profile of asymmetry (of a reproduced waveform) of a magnetic head, incorporating each of the sensors of Example and Comparative Example, in the direction of the track width was

measured by scanning the magnetic head over a microtrack pattern recorded on a recording medium and having a width of  $0.1 \times 10^{-6}$  m ( $\mu\text{m}$ ). Measured results are shown in Fig. 26 (asymmetry of the magnetic head incorporating the sensor of Comparative Example) and Fig. 27 (asymmetry of the magnetic head incorporating the sensor of Example).

In Fig. 26 representing the measured results of Comparative Example, abnormally large asymmetry appears in the vicinity of both track ends. This is related to the fact that the magnetization of the second free magnetic layer is disordered in the vicinity of both track ends as shown in Fig. 20, and is greatly deviated from nearly orthogonal relation to the magnetization of the second pinned magnetic layer. By contrast, in Fig. 27 representing the measured results of Example of the present invention, it is apparent that asymmetry shows no such large changes as in Fig. 20 at both the track ends, and a stable waveform is obtained.

According to the spin-valve type magnetoresistive sensor of the present invention, as fully described above, the antiferromagnetic layer and the bias layer are each made of an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn. Therefore, the exchange anisotropic magnetic field has a good temperature characteristic, and the spin-valve type magnetoresistive sensor has superior heat resistance.

Also, the spin-valve type magnetoresistive sensor has good durability even when it is provided in a device such as a magnetoresistive head in which the temperature reaches a high level, and exhibits a less variation in the exchange anisotropic magnetic field (exchange-coupled magnetic field) with a temperature change.

Further, by forming the antiferromagnetic layer of the above-mentioned alloy, the blocking temperature can be raised and a greater exchange anisotropic magnetic field can be generated in the antiferromagnetic layer. As a result, the magnetization direction of the pinned magnetic layer can be firmly held stationary.

In the spin-valve type magnetoresistive sensor of the present invention, at least one of the pinned magnetic layer and the free magnetic layer may be divided into two layers with a non-magnetic intermediate layer interposed between the two layers. The divided two layers are held in the ferrimagnetic state where these layers are magnetized in directions 180° different from each other.

In the spin-valve type magnetoresistive sensor wherein at least the pinned magnetic layer is divided into two layers with a non-magnetic intermediate layer interposed between the two layers, one of the divided two pinned magnetic layers serves to make the magnetization of the other layer stationary in a proper direction, and therefore the magnetized state of the pinned

magnetic layer can be held in a very stable condition.

On the other hand, in the spin-valve type magnetoresistive sensor wherein at least the free magnetic layer is divided into two layers with a non-magnetic intermediate layer interposed between the two layers, an exchange-coupled magnetic field is generated between the divided two free magnetic layers so that these layers are brought into the ferrimagnetic state and magnetization of each layer can rotate with good sensitivity in response to an external magnetic field.

Moreover, with the method of manufacturing the spin-valve type magnetoresistive sensor according to the present invention, an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn is used for the antiferromagnetic layer and the bias layer. By utilizing properties of such an alloy, the magnetization direction of the pinned magnetic layer is made stationary by the first heat treatment, and the magnetization direction of the free magnetic layer is uniformly arranged in a direction crossing the magnetization direction of the pinned magnetic layer by the second heat treatment. It is therefore possible to uniformly arrange the magnetization direction of the free magnetic layer in a direction crossing the magnetization direction of the pinned magnetic layer without adversely affecting the magnetization direction of the pinned magnetic layer, and to provide a spin-valve type magnetoresistive sensor

having superior heat resistance.

Also, with the method of manufacturing the spin-valve type magnetoresistive sensor, the soft magnetic layers are formed on the first laminate, and the bias layers are formed on the soft magnetic layers. After forming the soft magnetic layers, therefore, the bias layers can be formed without breaking a vacuum. This means no necessity of cleaning a surface, on which the bias layers are to be formed, by ion milling or reverse sputtering. As a result, the manufacturing method is superior in being free from a drawback attributable to the cleaning, such as an adverse effect upon generation of the exchange anisotropic magnetic field caused by contamination with foreign matters deposited again on the surface or disorder of the crystal state at the surface.

Further, the manufacturing process is facilitated because of no necessity of cleaning the surface, on which the bias layers are to be formed, before forming the bias layers. Alternatively, a more stable longitudinal bias and a higher output can be obtained by cutting the surface of the free magnetic layer by ion milling, etc. to such a depth that the above-mentioned adverse effect is completely eliminated, and then forming the soft magnetic layers and the bias layers successively.

In addition, according to the magnetoresistive head of the present invention, since the spin-valve type magnetoresistive sensor described above is provided on a slider, a highly reliable

magnetoresistive head can be obtained which is superior in durability and heat resistance, and which can generate an exchange anisotropic magnetic field at a sufficient level.

0  
1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217  
2218  
2219  
2220  
2221  
2222  
2223  
2224  
2225  
2226  
2

WHAT IS CLAIMED IS:

1. A spin-valve type magnetoresistive sensor comprising, on a substrate, an antiferromagnetic layer; a pinned magnetic layer formed in contact with said antiferromagnetic layer and having a magnetization direction made stationary under an exchange anisotropic magnetic field generated by interaction with said antiferromagnetic layer; a non-magnetic electrically conductive layer formed between a free magnetic layer and said pinned magnetic layer; soft magnetic layers arranged on said free magnetic layer while a spacing corresponding to a track width is left between said soft magnetic layers; bias layers formed on said soft magnetic layers and acting to uniformly arrange a magnetization direction of said free magnetic layer in a direction crossing the magnetization direction of said pinned magnetic layer; and electrically conductive layers for applying a detection electric current to said free magnetic layer,


said antiferromagnetic layer and said bias layer being each made of an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn.

2. A spin-valve type magnetoresistive sensor according to Claim 1, wherein at least one of said pinned magnetic layer and said free magnetic layer is divided into two layers with a




non-magnetic intermediate layer interposed between the two layers, and the divided two layers are held in a ferrimagnetic state where these layers are magnetized in directions 180°different from each other.

3. A spin-valve type magnetoresistive sensor according to Claim 1, wherein said antiferromagnetic layer is made of an alloy having the following composition formula;




where X is at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir and Os, and a composition ratio  $m$  satisfies  $48 \text{ atom \%} \leq m \leq 60 \text{ atom \%}$ .

4. A spin-valve type magnetoresistive sensor according to Claim 1, wherein said bias layer is made of an alloy having the following composition formula;




where X is at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir and Os, and a composition ratio  $m$  satisfies  $48 \text{ atom \%} \leq m \leq 60 \text{ atom \%}$ .

5. A spin-valve type magnetoresistive sensor according to Claim 1, wherein said antiferromagnetic layer is made of an alloy having the following composition formula;



where D is at least one or more elements selected from among Pd, Rh, Ru, Ir and Os, and composition ratios  $m, n$  satisfy  $48 \text{ atom \%} \leq m + n \leq 60 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq n \leq 40 \text{ atom \%}$ .

6. A spin-valve type magnetoresistive sensor according to Claim 1, wherein said bias layer is made of an alloy having the following composition formula;



where D is at least one or more elements selected from among Pd, Rh, Ru, Ir and Os, and composition ratios  $m, n$  satisfy  $52 \text{ atom \%} \leq m + n \leq 60 \text{ atom \%}$  and  $0.2 \text{ atom \%} \leq n \leq 40 \text{ atom \%}$ .

7. A spin-valve type magnetoresistive sensor according to Claim 1, wherein said soft magnetic layer is made of a NiFe alloy.

8. A spin-valve type magnetoresistive sensor according to Claim 1, wherein recesses are formed in said free magnetic layer on both sides of an area corresponding to a track width, said soft magnetic layers are formed to fill said recesses and are directly joined to said free magnetic layer through bottom surfaces of said recesses, and said bias layers and said electrically conductive layers are successively formed on said soft magnetic layers.

9. A spin-valve type magnetoresistive sensor according to

Claim 1, wherein said free magnetic layer is divided into two layers with a non-magnetic intermediate layer interposed between the two layers, and wherein, assuming that one free magnetic layer farther away from said pinned magnetic layer is a first free magnetic layer and the other free magnetic layer closer to said pinned magnetic layer is a second free magnetic layer, a magnetic film thickness of said first free magnetic layer is smaller than a magnetic film thickness of said second free magnetic layer.

10. A method of manufacturing a spin-valve type magnetoresistive sensor comprising the steps of:

forming an antiferromagnetic layer, a pinned magnetic layer, a non-magnetic electrically conductive layer, and a free magnetic layer successively on a substrate, thereby forming a first laminate;

heat-treating said first laminate at a first heat treatment temperature while applying a first magnetic field in a direction perpendicular to a direction of a track width, thereby generating an exchange anisotropic magnetic field in said antiferromagnetic layer to make magnetization of said pinned magnetic layer stationary;

forming soft magnetic layers on said first laminate while a spacing corresponding to the track width is left between said soft magnetic layers, forming bias layers on said soft magnetic

layers, and forming electrically conductive layers on said bias layers for applying a detection electric current to said free magnetic layer, thereby forming a second laminate; and

heat-treating said second laminate at a second heat treatment temperature while applying a second magnetic field smaller than the exchange anisotropic magnetic field of said antiferromagnetic layer in a direction of the track width, thereby imparting a bias magnetic field to said free magnetic layer in a direction crossing a magnetization direction of said pinned magnetic layer.

11. A method of manufacturing a spin-valve type magnetoresistive sensor according to Claim 10, wherein said antiferromagnetic layer and said bias layers are each made of an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn.

12. A method of manufacturing a spin-valve type magnetoresistive sensor according to Claim 10, wherein said first heat treatment temperature is in a range of 220°C - 270°C.

13. A method of manufacturing a spin-valve type magnetoresistive sensor according to Claim 10, wherein said second heat treatment temperature is in a range of 250°C - 270°C.

14. A method of manufacturing a spin-valve type magnetoresistive sensor according to Claim 10, wherein said second magnetic field is in a range of 10 - 600 Oe (800 - 48000 A/m) .

ABSTRACT OF THE DISCLOSURE

The invention is intended to provide a spin-valve type magnetoresistive sensor which is superior in heat resistance and corrosion resistance, and which has a bias structure enabling magnetization direction of a free magnetic layer to be uniformly arranged with certainty. The spin-valve type magnetoresistive sensor comprises, on a substrate, an antiferromagnetic layer; a pinned magnetic layer having a magnetization direction made stationary; a non-magnetic electrically conductive layer formed between the pinned magnetic layer and a free magnetic layer; soft magnetic layers arranged on the free magnetic layer while a spacing corresponding to a track width is left between the soft magnetic layers; bias layers formed on the soft magnetic layers and acting to uniformly arrange a magnetization direction of the free magnetic layer in a direction crossing the magnetization direction of the pinned magnetic layer; and electrically conductive layers. The antiferromagnetic layer and the bias layers are each made of an alloy containing at least one or more elements selected from among Pt, Pd, Rh, Ru, Ir, Os, Au, Ag, Cr, Ni, Ne, Ar, Xe and Kr, as well as Mn.

FIG. 1

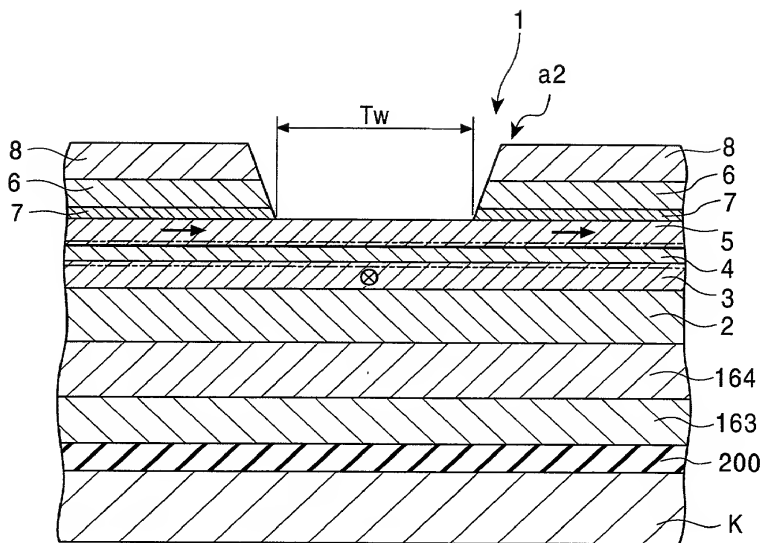


FIG. 2

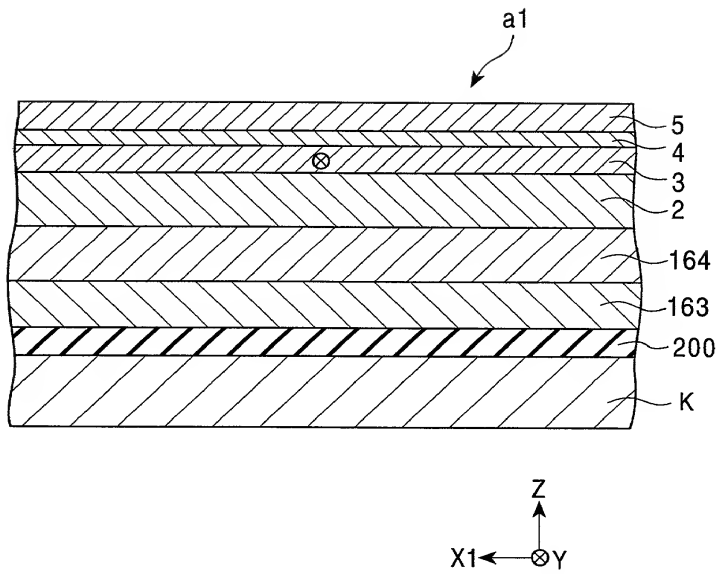




FIG. 3

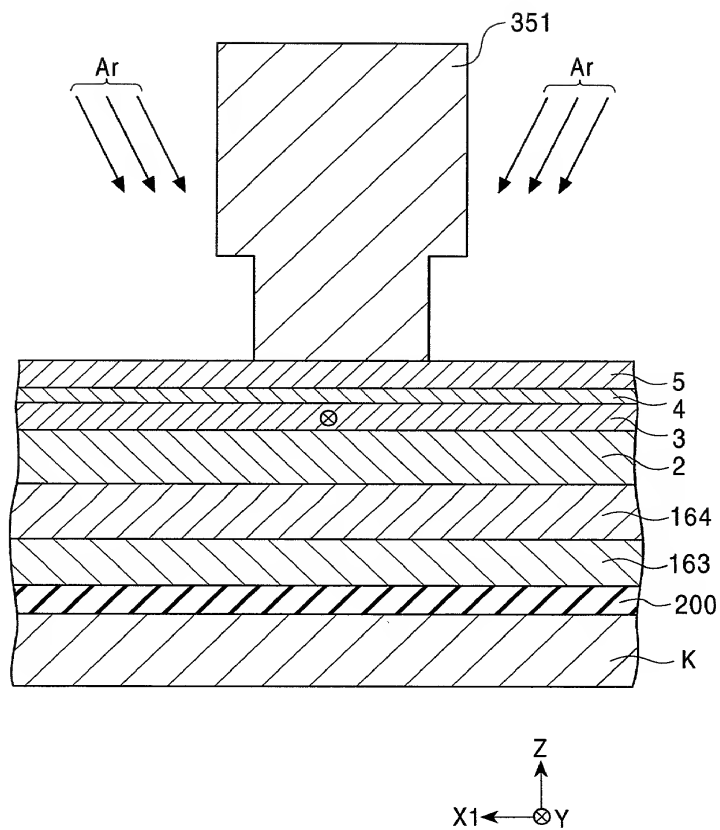


FIG. 4


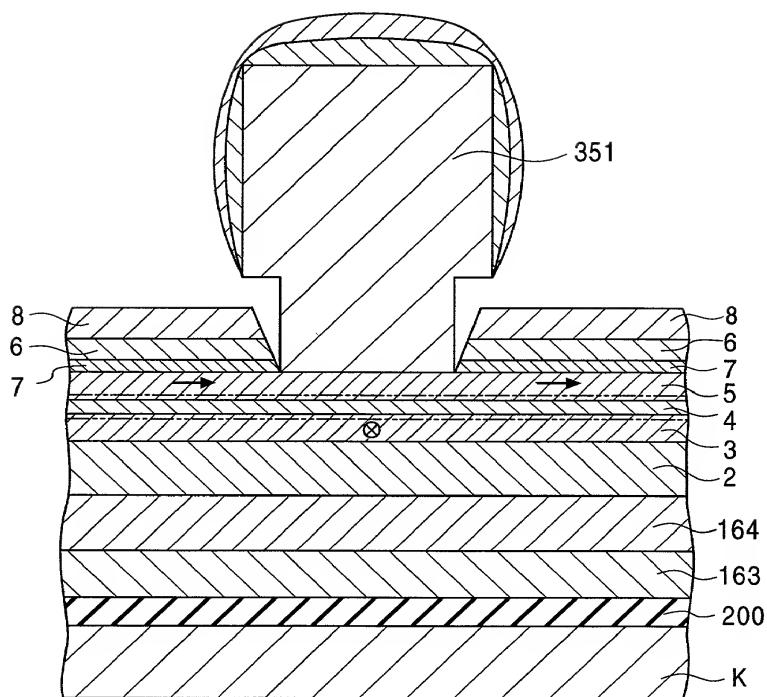


FIG. 5

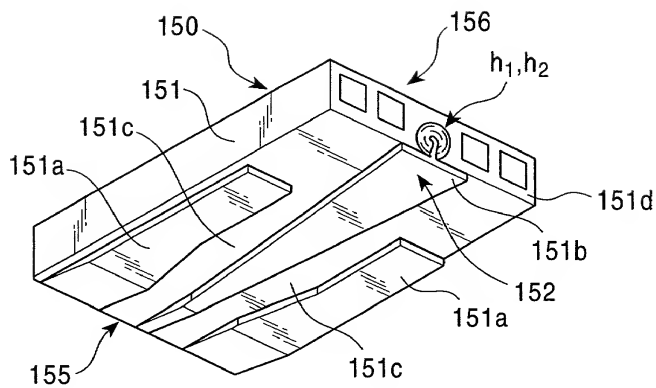


FIG. 6

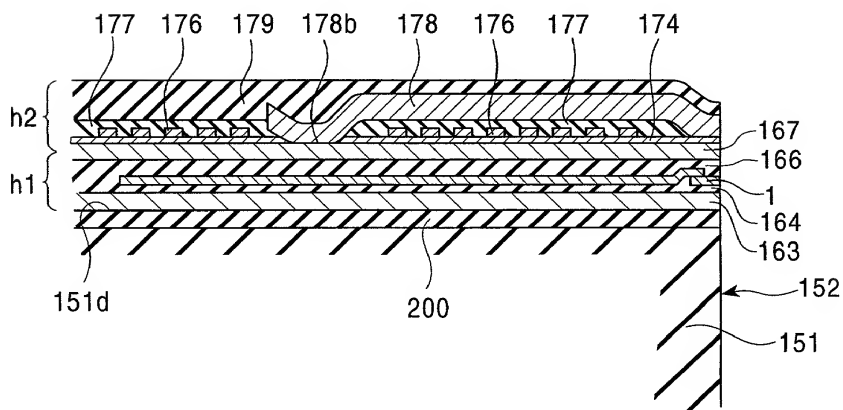


FIG. 7

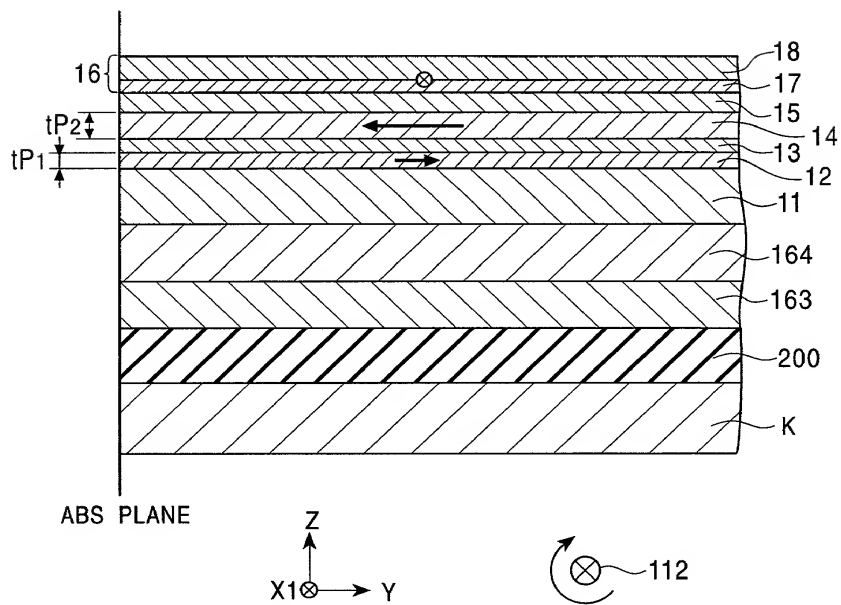


FIG. 8

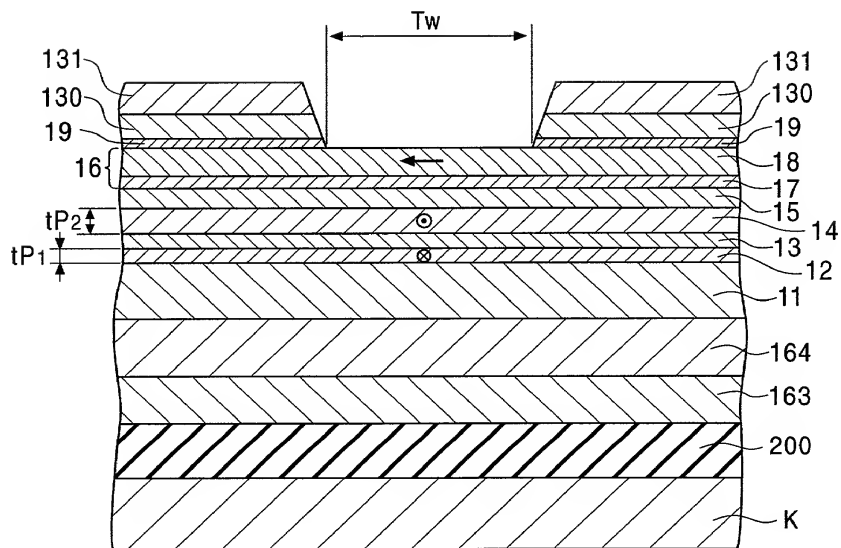


FIG. 9

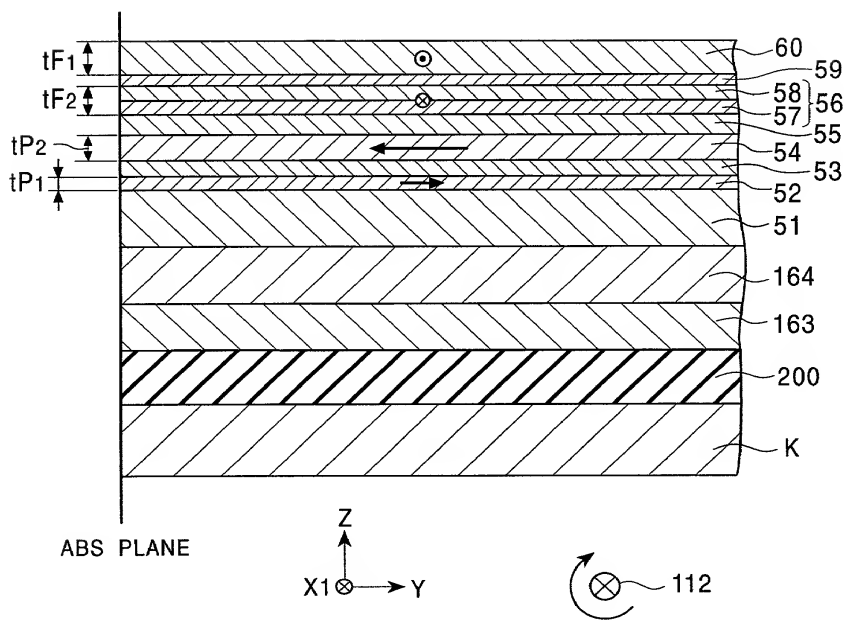


FIG. 10

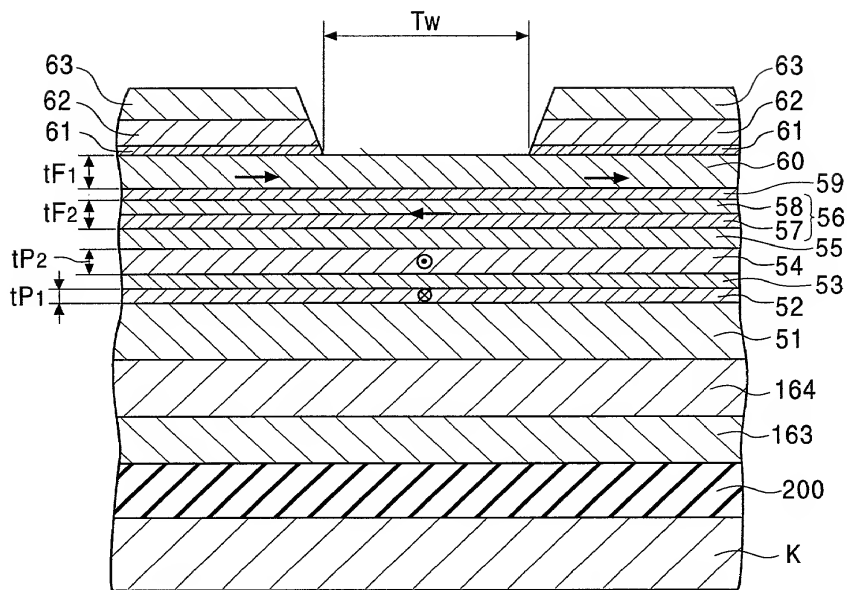


FIG. 11

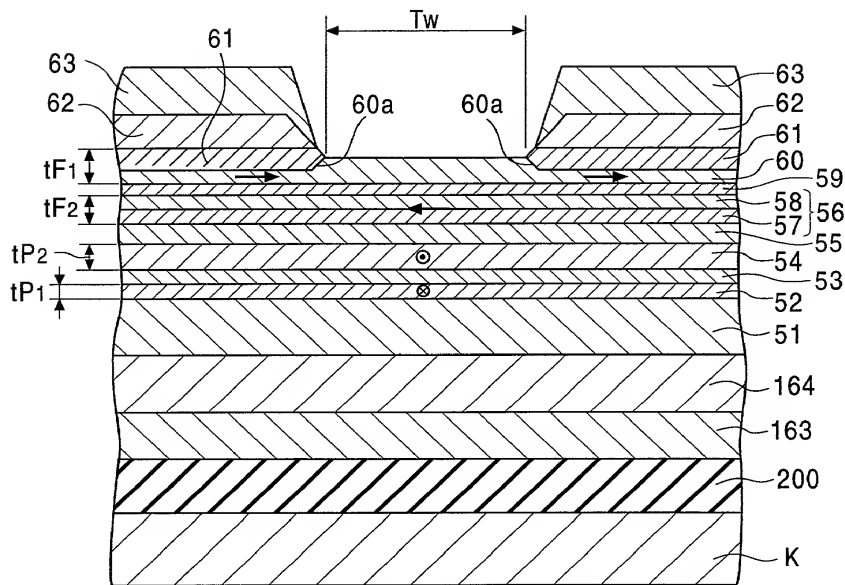




FIG. 12

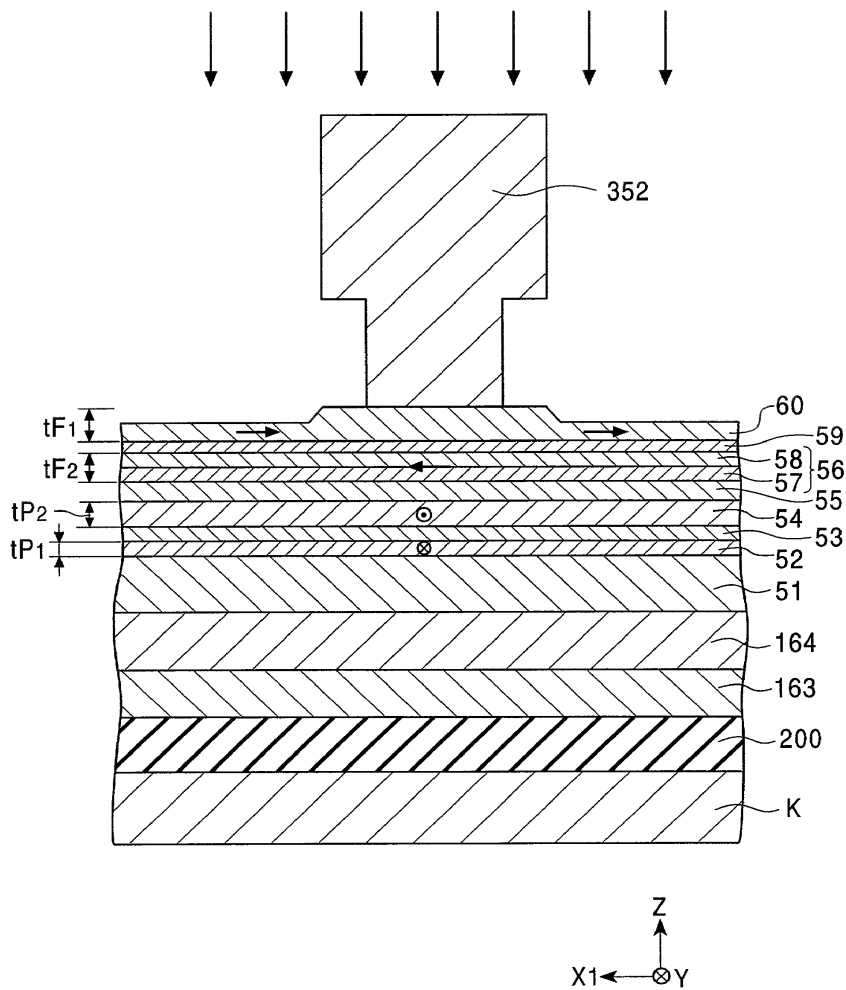


FIG. 13  
PRIOR ART

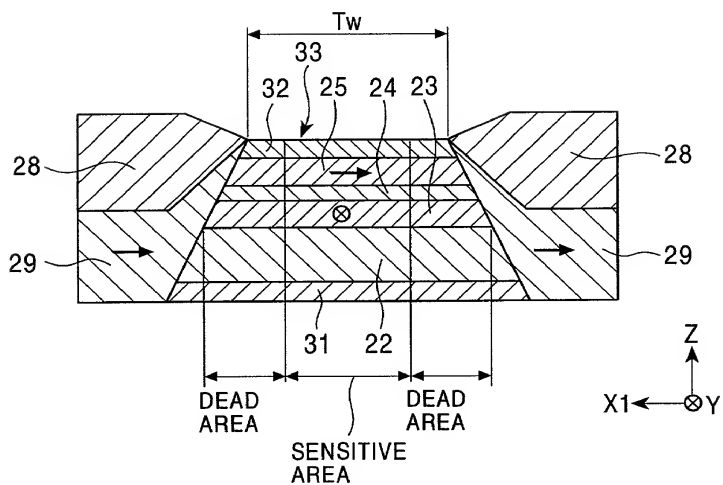


FIG. 14  
PRIOR ART

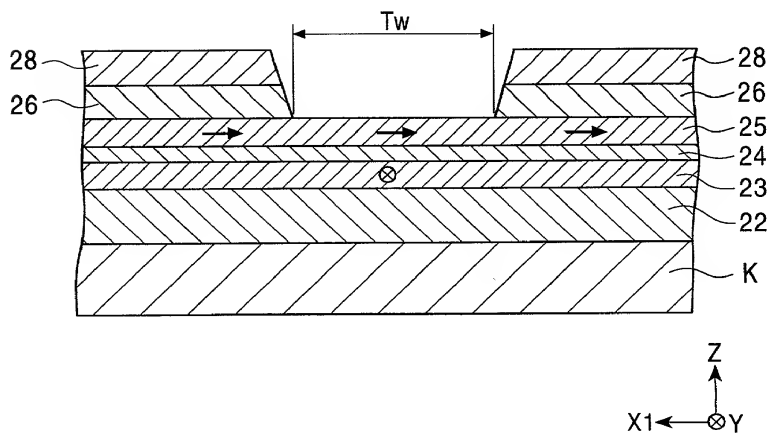


FIG. 15  
PRIOR ART


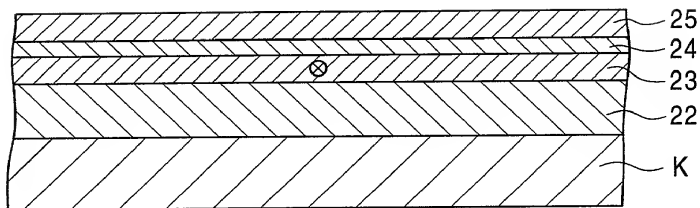


FIG. 16  
PRIOR ART


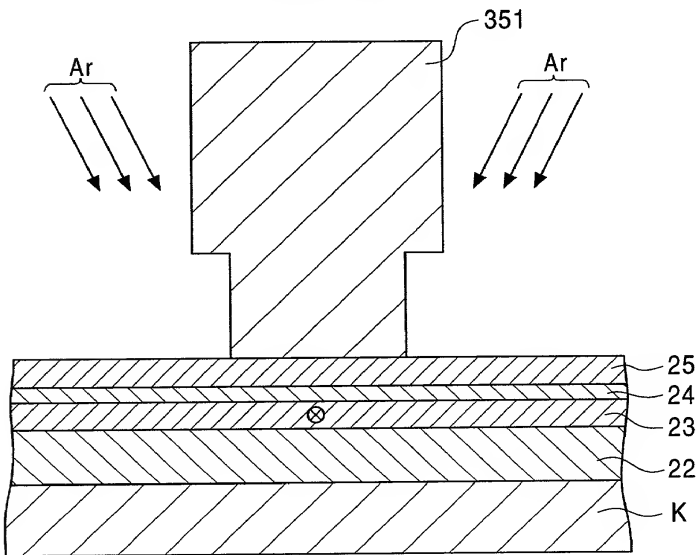


FIG. 17  
PRIOR ART

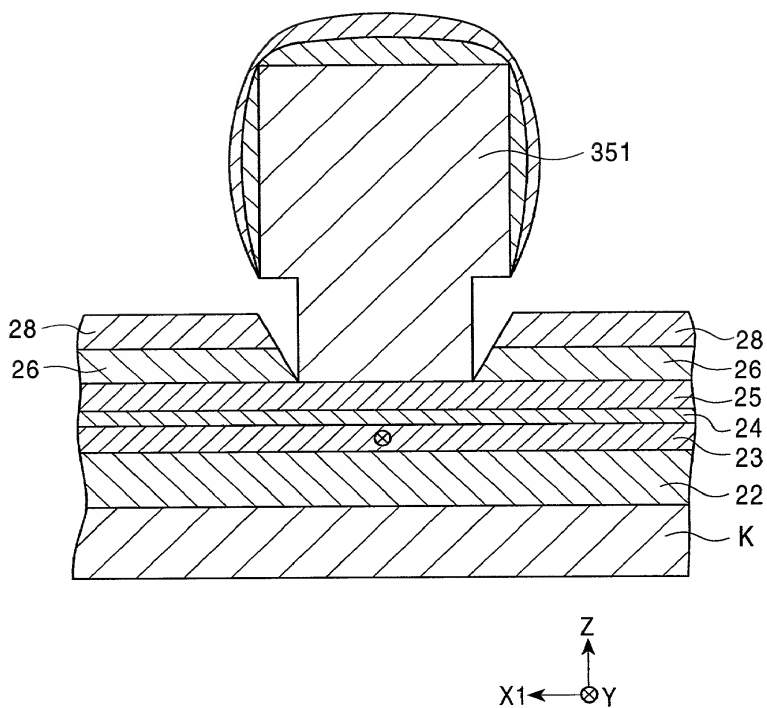


FIG. 18  
PRIOR ART

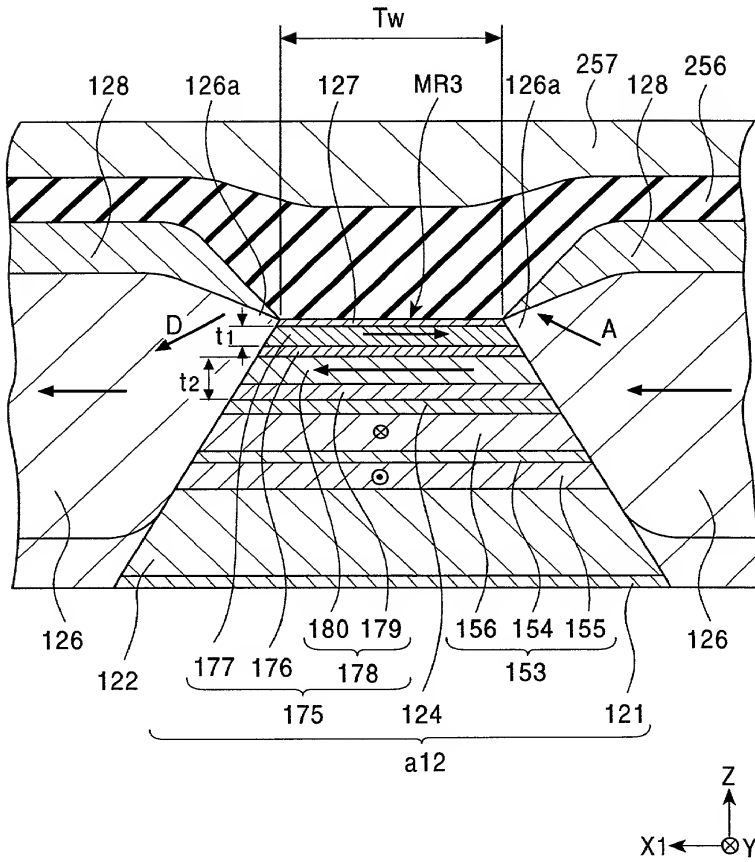


FIG. 19  
PRIOR ART

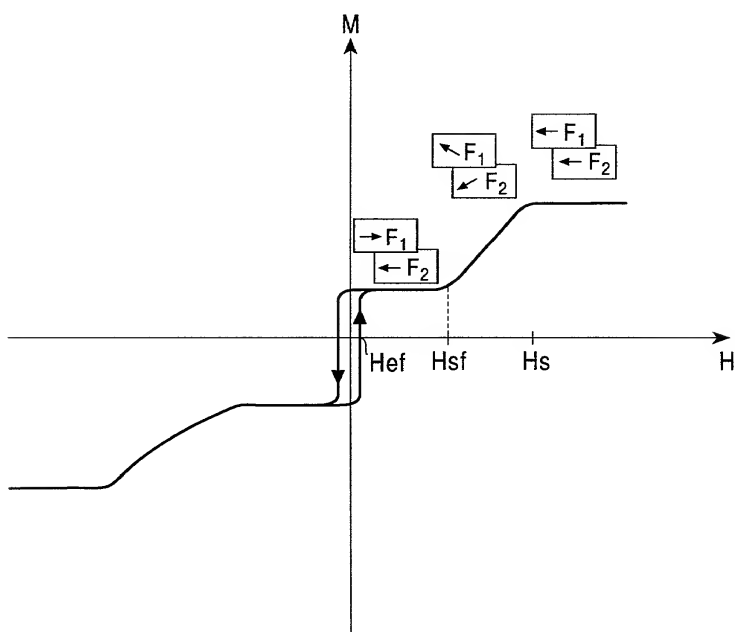


FIG. 20  
PRIOR ART

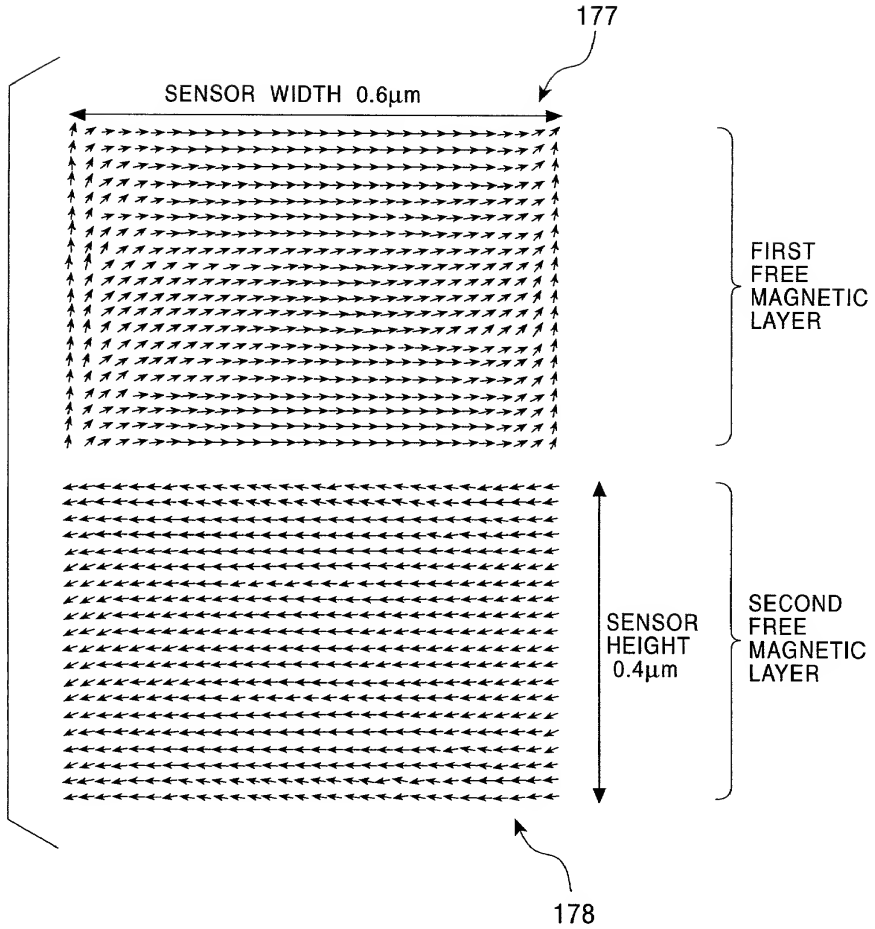


FIG. 21

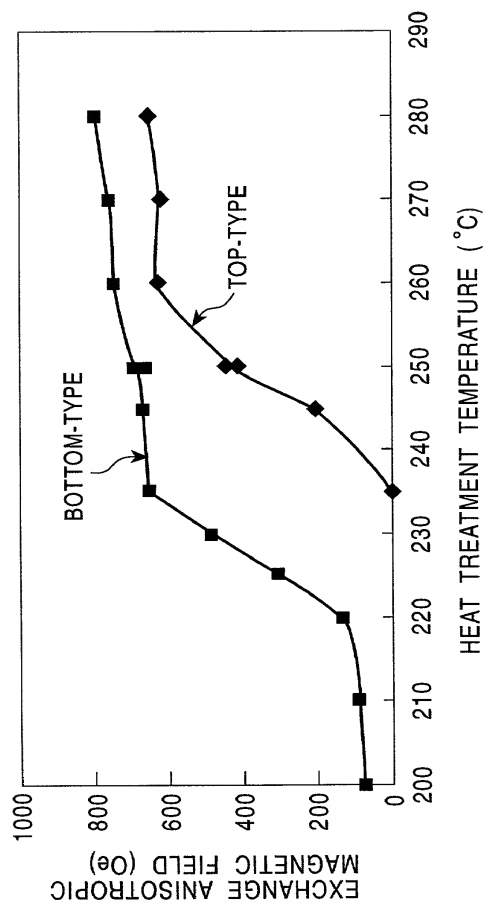




FIG. 22

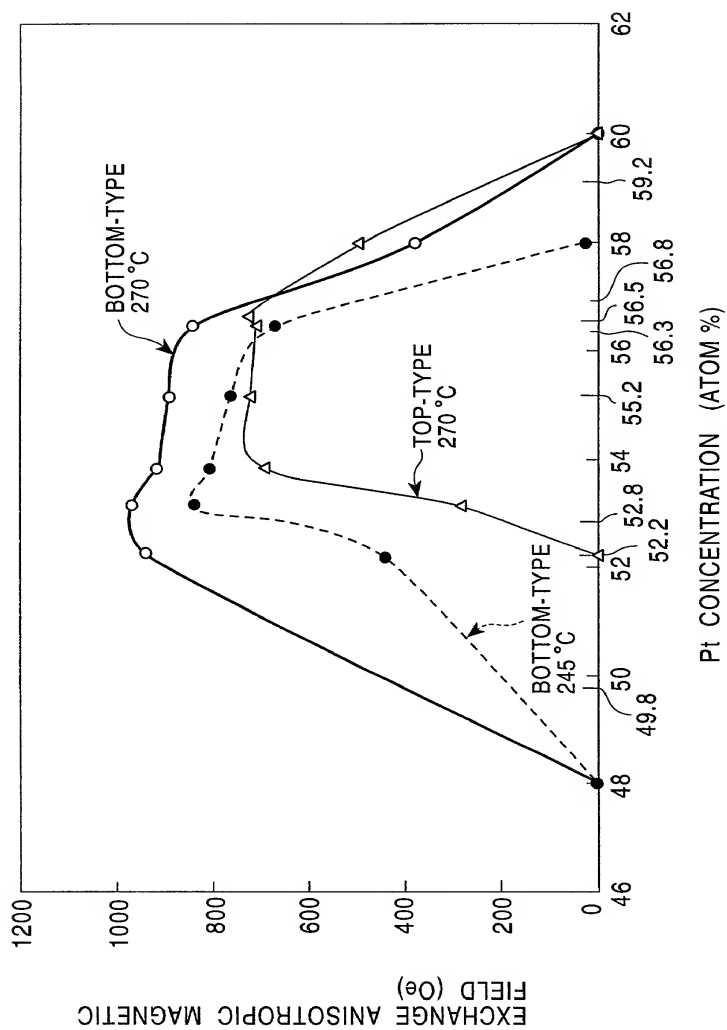


FIG. 23

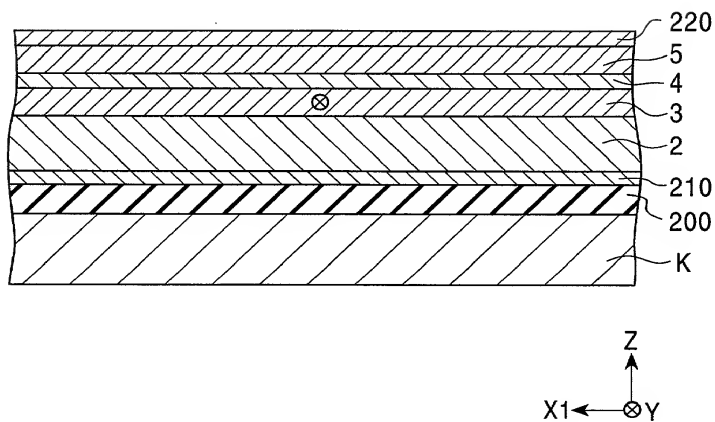


FIG. 24

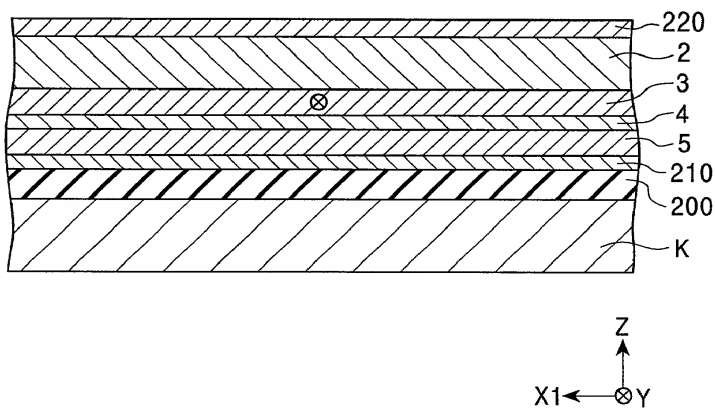


FIG. 25

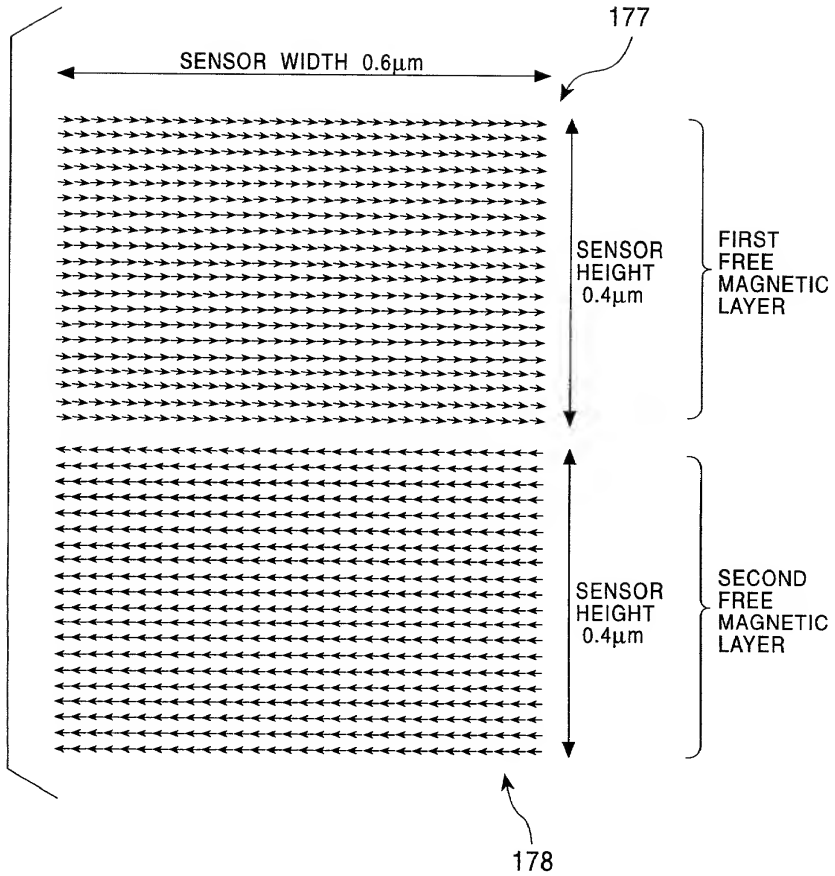


FIG. 26  
PRIOR ART


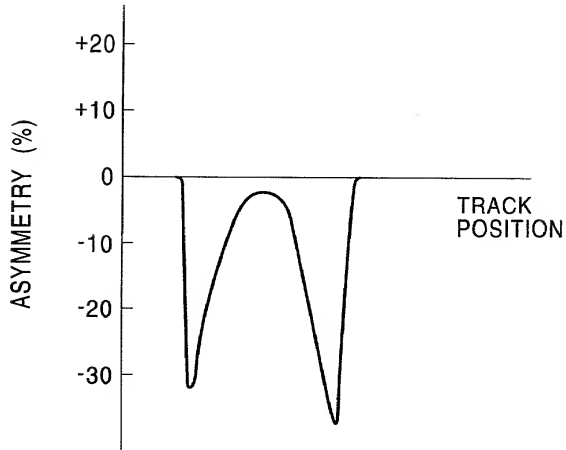


FIG. 27

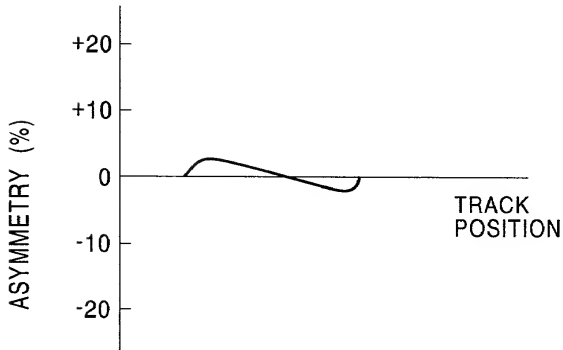

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Declaration and Power of Attorney For Patent Application

### 特許出願宣言書及び委任状

### Japanese Language Declaration

### 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Spin-Valve Type Magnetoresistive  
Sensor and Method of Manufacturing  
the Same

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を \_\_\_\_\_ とし、  
（該当する場合） \_\_\_\_\_ に訂正されました。

☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定策されるっており、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1996, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一か国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

### Prior Foreign Application(s)

外国での先行出願

11-157132

(Number)  
(番号)

Japan

(Country)  
(国名)

03/06/1999

(Day/Month/Year Filed)  
(出願年月日)

(Number)  
(番号)

(Country)  
(国名)

(Day/Month/Year Filed)  
(出願年月日)

私、第35編米国法典119条(e)項に基づいて下記の米国外の特許出願規定に記載された権利をここに主張いたします。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外の特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)項に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外の特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Status: Patented, Pending, Abandoned)  
(状況: 特許許可済、係属中、放棄済)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Status: Patented, Pending, Abandoned)  
(状況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration  
(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

See Attachment A

送付先

Send Correspondence to:

Brinks Hofer Gilson & Lione  
P.O. Box 10395  
Chicago, Illinois 60610  
(312) 321-4200

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

唯一または第一発明者名

Full name of sole or first inventor

Naoya Hasegawa

発明者の署名

日付

Inventor's signature

Date

Naoya Hasegawa

May 9, 2000

住所

Residence

Niigata-ken, Japan

国籍

Citizenship

Japan

私書箱

Post Office Address c/o ALPS ELECTRIC CO., LTD.

1-7 Yukigaya, Otsuka-cho, Ota-ku, Tokyo, Japan

第二共同発明者

Full name of second joint inventor, if any

第二共同発明者

日付

Second inventor's signature

Date

住所

Residence

国籍

Citizenship

私書箱

Post Office Address c/o ALPS ELECTRIC CO., LTD.

1-7 Yukigaya, Otsuka-cho, Ota-ku, Tokyo, Japan

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

## ATTACHMENT A

Guy W. Shoup	26,805
Allan J. Sternstein	27,396
Gustavo Siller, Jr.	32,305
John C. Freeman	34,483
William F. Prendergast	34,699
Vita G. Conforti	39,639
Mark H. Remus	40,141
Steven G. Steger	40,185
Tadashi Horie	40,437
Joseph F. Hetz	41,070
Jason C. White	42,223